



CONFIDENTIAL  
THE DRAWINGS AND TECHNICAL INFORMATION  
INCLUDED HEREIN ARE THE PROPERTY OF  
OGURA INDUSTRIAL CORP AND CAN NOT  
BE DUPLICATED WITHOUT WRITTEN APPROVAL  
FROM OIC.

| REV | REVISION STATUS                     | NOTE  | DATE          | CHK        | BY        |
|-----|-------------------------------------|-------|---------------|------------|-----------|
| 9   | Change Ball Bearing etc.            | (3) 2 | Next assemble | Jan 11 '94 | N.S. T.I. |
| 5   | Change Ball Bearing Add Torque etc. | (5) 2 | Next assemble | Jan 13 '96 | N.S. K.B. |
| 6   | Changed from snap ring to staking   | (2) 9 | Others        | Mar 25 '03 | M.A. 1/4  |

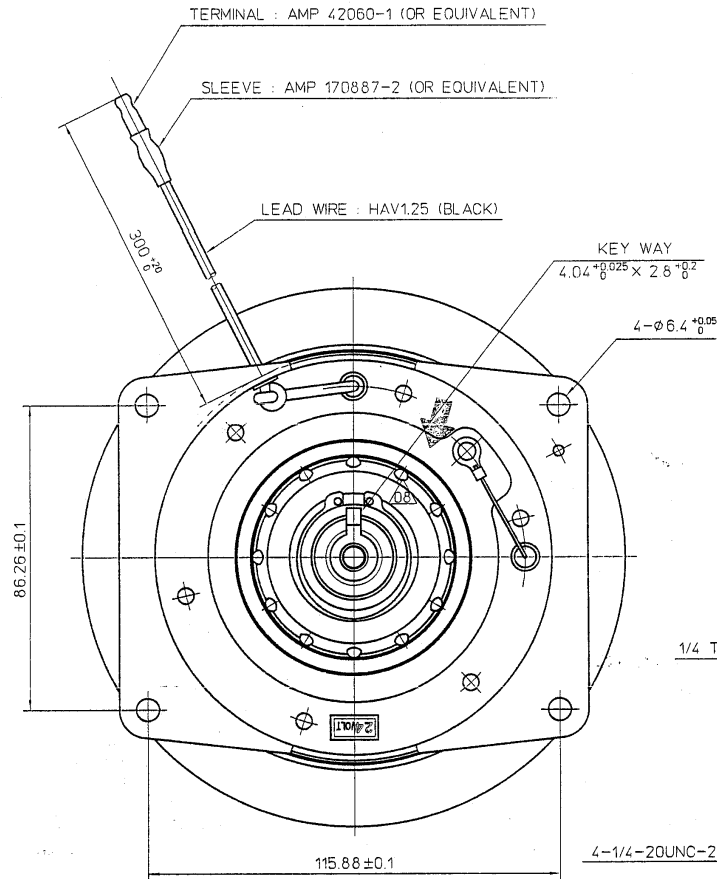


#### SPECIFICATIONS

1. EXCITING VOLTAGE : D.C.24 V
2. STATIC TORQUE  
INITIAL : 39 N·m  
AFTER BURNISHING : 101 N·m
3. POWER CONSUMPTION : MAX.30 W
4. ROTATION : C.W.
5. WEIGHT : 3.6 kg

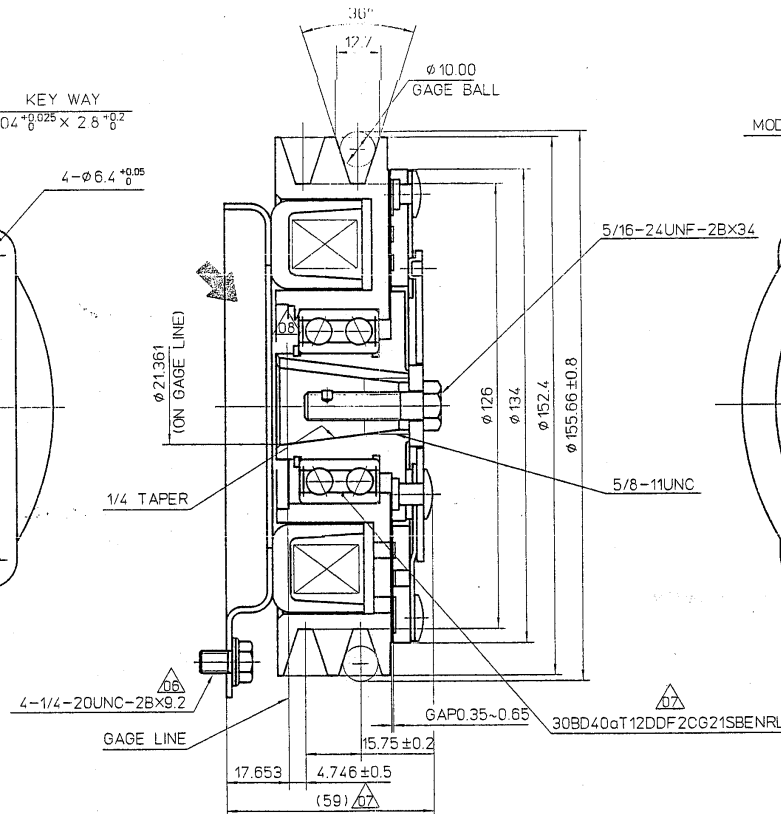

#### NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- FRICITION SURFACE
- RIVET (MFZn2-B)
- HUB INNER DIA.
- FIELD CORE COIL ASSY (MFZn3)

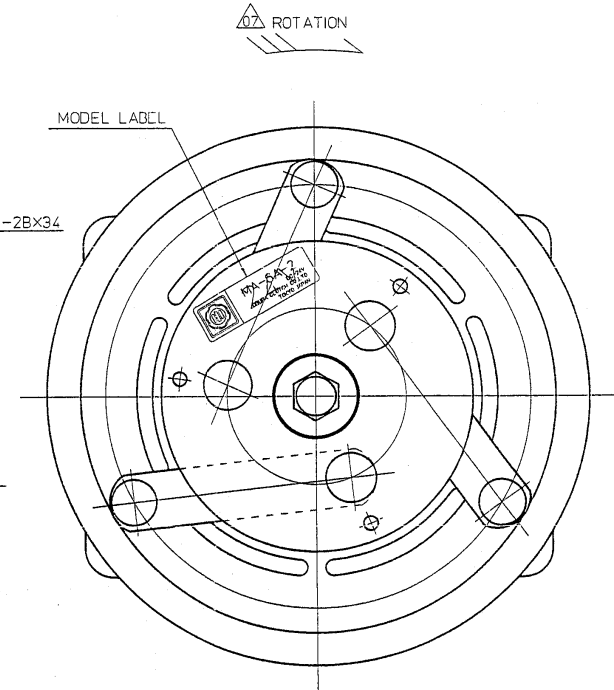

縮小図  
変更図

No.2011

|                                                          |      |                                     |            |                 |  |          |             |          |            |                 |     |  |
|----------------------------------------------------------|------|-------------------------------------|------------|-----------------|--|----------|-------------|----------|------------|-----------------|-----|--|
| SURFACE<br>ROUGHNESS<br>UNLESS<br>OTHERWISE<br>SPECIFIED |      | GENERAL<br>TOLERANCE<br>FOR CLASS 1 |            | WORKING PROCESS |  | APPRO    | E.Maejima   | DATE     | Mar 25 '93 | SIZE            | A2  |  |
| RANGE                                                    |      | TOL.                                |            | MATERIAL        |  | CHKD     | T. Ishimaru | DATE     | Mar 25 '93 | SCALE           | 1/1 |  |
| ▽                                                        | 50S  | OVER 0.5                            | 6 ± 0.1    | MATERIAL        |  | DWN      | N. Sasaki   | DATE     | Mar 25 '93 | <div>1/1</div>  |     |  |
| ▽▽                                                       | 25S  | 6                                   | 30 ± 0.2   | MATERIAL        |  | CUSTOMER |             |          |            |                 |     |  |
| ▽▽▽                                                      | 16S  | 30                                  | 120 ± 0.3  | MATERIAL        |  | EX       |             |          |            |                 |     |  |
| ▽▽▽▽                                                     | 10S  | 120                                 | 315 ± 0.5  | MATERIAL        |  | MODEL    |             |          |            |                 |     |  |
| ▽▽▽▽▽                                                    | 0.8S | 315                                 | 1000 ± 0.8 | MATERIAL        |  | MA-6A-2  |             |          |            |                 |     |  |
| HISTORY                                                  |      | 50107600                            |            | HEAT TREATING   |  | 0        |             | ASSY NO  |            |                 |     |  |
| ISSUE NO                                                 |      | PLANT                               |            | PARTS           |  | CODE     |             | NAME     |            | MAGNETIC CLUTCH |     |  |
| ISSUE DATE                                               |      | 4 08                                |            | 5213200000      |  | DWG NO   |             | 50107600 |            |                 |     |  |
| OGURA CLUTCH Co.LTD.                                     |      |                                     |            |                 |  |          |             |          |            |                 |     |  |