


9	Change Computer Aided Design	(1)	4	Be executed	Initial	S.O.	M.L.

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

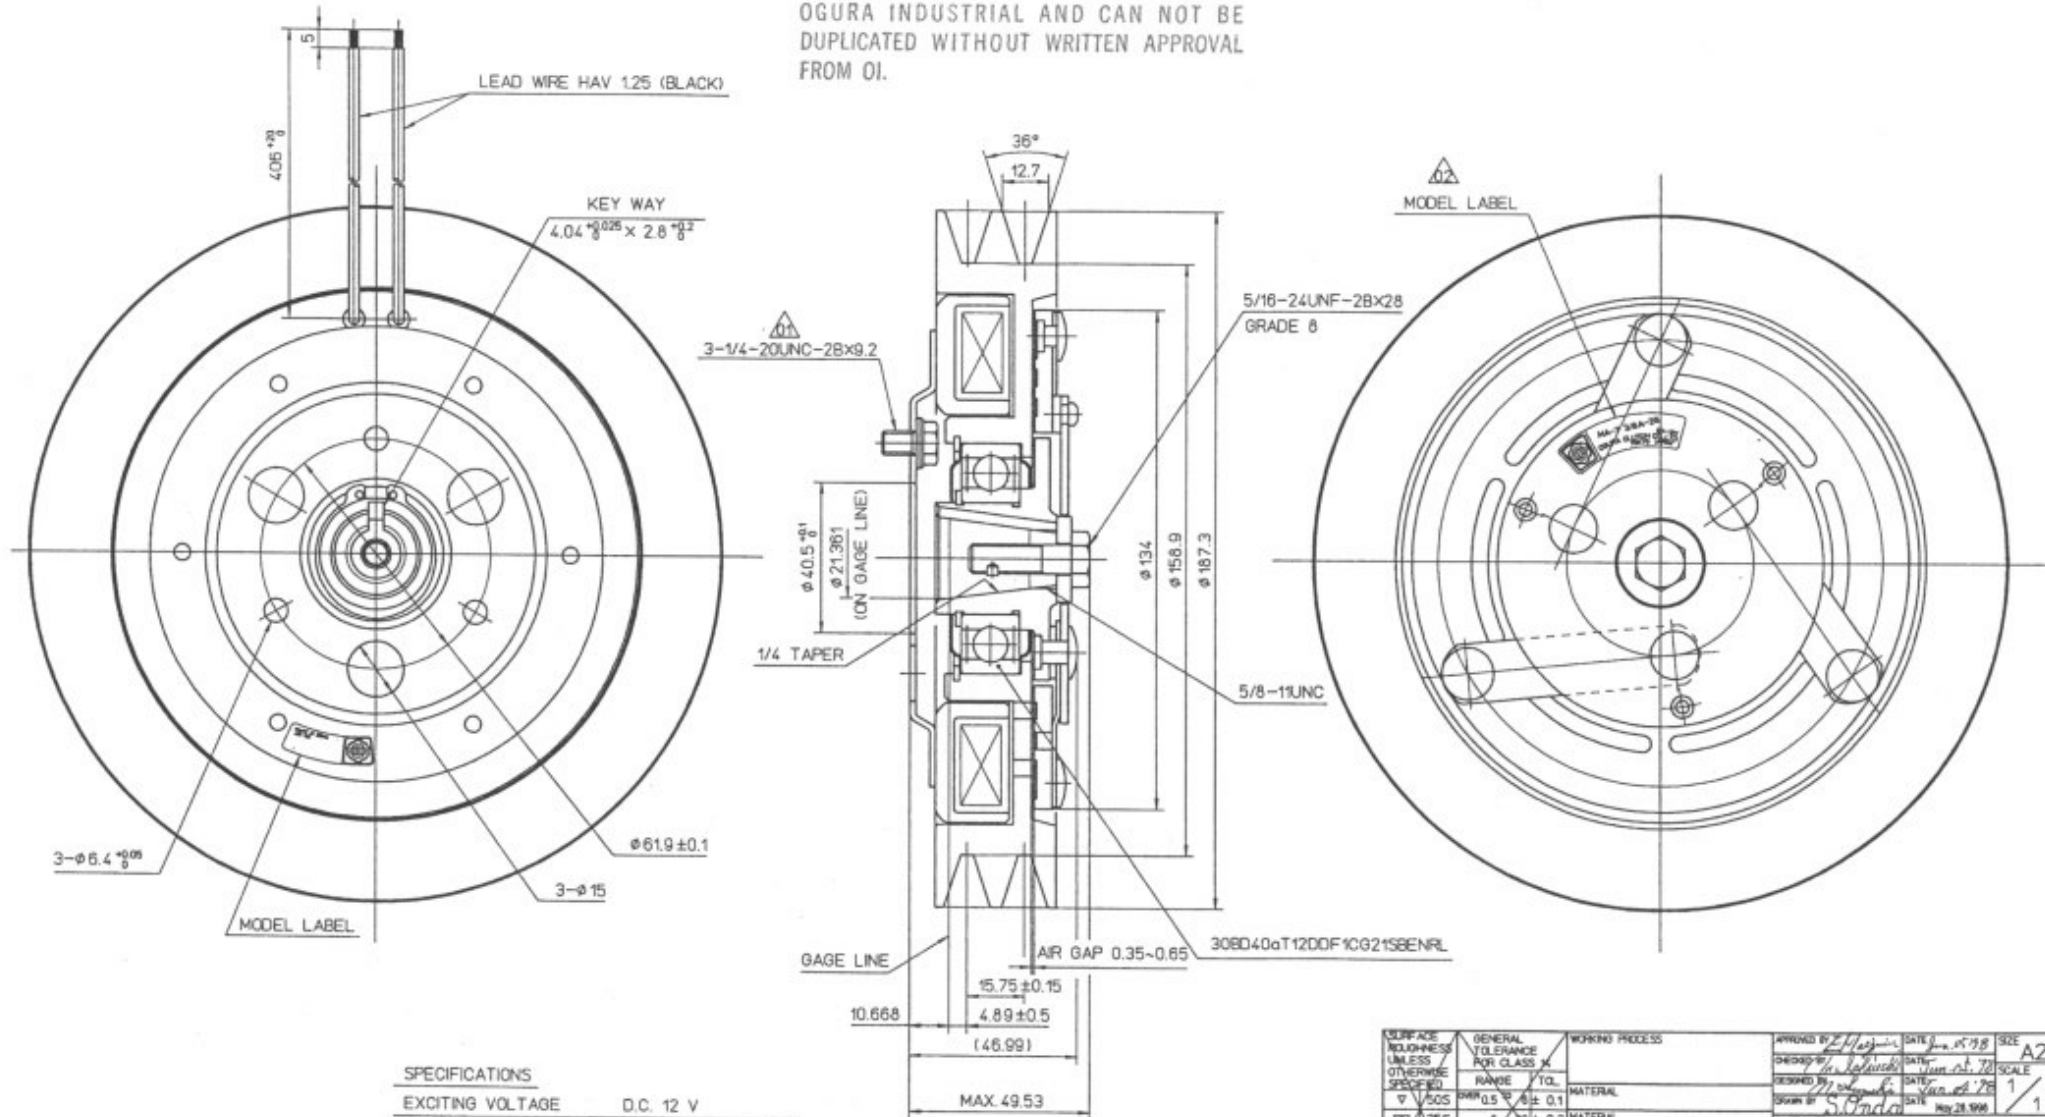

SPECIFICATIONS

EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 45 W
STATIC TORQUE (FINAL)	101.7 N·m (75 lbw·ft)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS N	WORKING PROCESS	APPROVED BY <i>E. H. H. H.</i> DATE <i>June 15, 1998</i> SIZE <i>A2</i>
$\sqrt{0.505}$	RANGE		CHECKED BY <i>E. H. H. H.</i> DATE <i>June 15, 1998</i> SCALE <i>1/1</i>
100 125 5	6 10 ± 0.1	MATERIAL	DESIGNED BY <i>E. H. H. H.</i> DATE <i>June 15, 1998</i>
100 125 5	6 10 ± 0.1	MATERIAL CODE	DRAWN BY <i>E. H. H. H.</i> DATE <i>June 15, 1998</i>
100 125 5	6 10 ± 0.1	MATERIAL SIZE	CUSTOMER
100 125 5	6 10 ± 0.1	HEAT TREAT	MODEL <i>MA-7 3/8A-2G</i>
100 125 5	6 10 ± 0.1	SURFACE TREAT	ASSY NO.
100 125 5	6 10 ± 0.1	PLANT	NAME <i>MAGNETIC CLUTCH</i>
100 125 5	6 10 ± 0.1	PARTS CODE	ISSUE NO.
100 125 5	6 10 ± 0.1	5913100000	ISSUE DATE
100 125 5	6 10 ± 0.1	OGURA CLUTCH Co.LTD.	50558100 <i>03</i> / <i>1</i>