
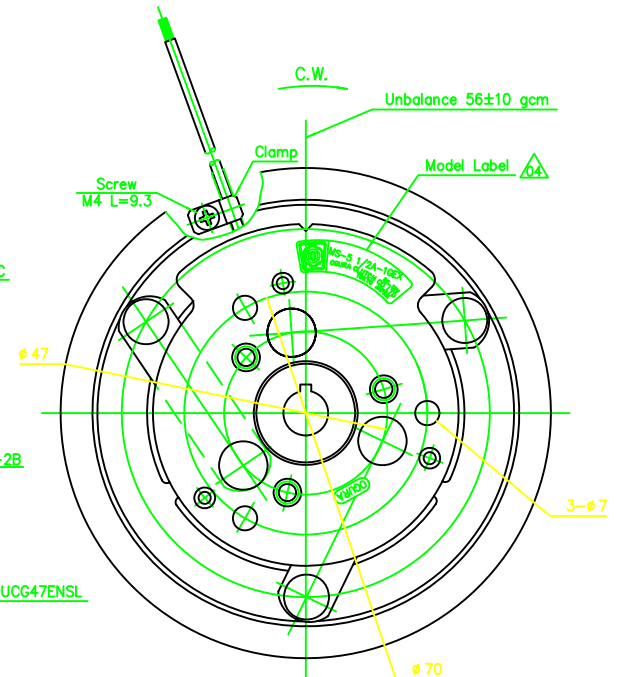
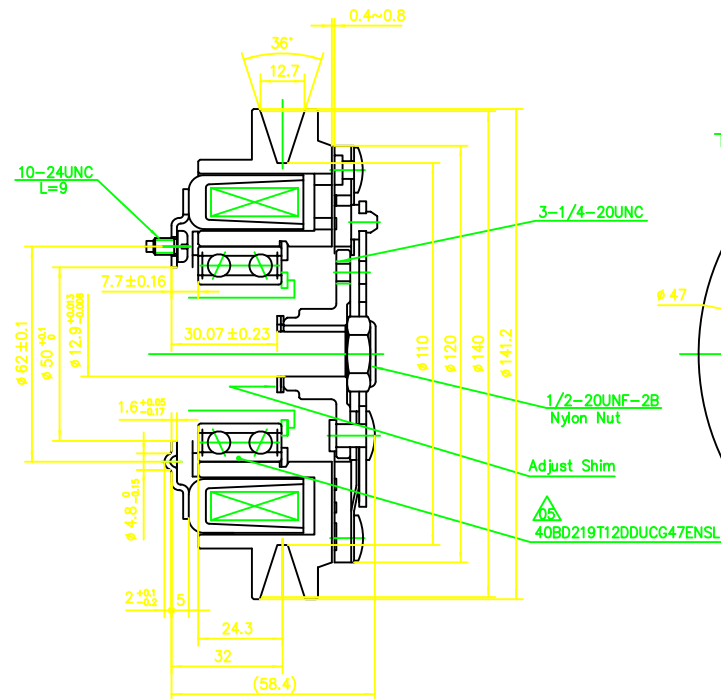


REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
3	D.C. 24V?Max.50.0W Was D.C.12V?Max.44.4W	(2) 1 Immediately	Nov.22/93	N.S	T.I.
3	Correct mistakes.	(1) 4 Be executed	Jan.14/95	N.S	K.B.
4	CHANGE BALL BEARING	(1) 9 Others	Jan.28/98	H.A	

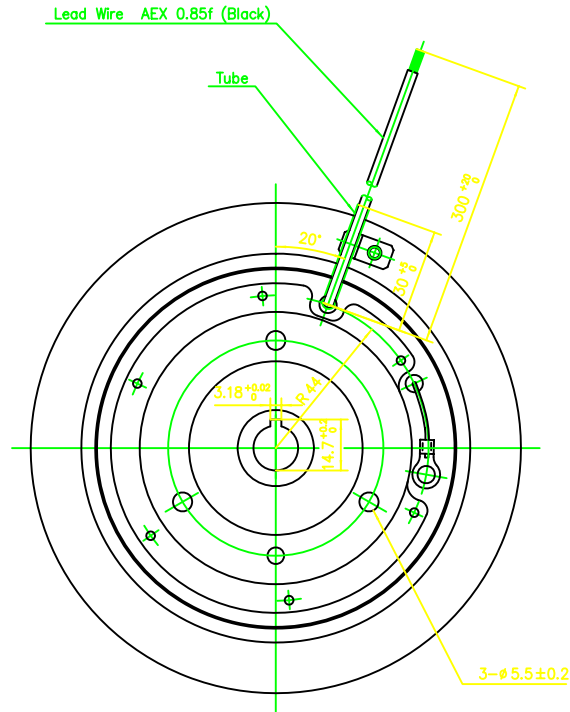

SPECIFICATIONS

Exciting Voltage	D.C. 12 V	0.3
Power Consumption	Max. 50.0 W	0.3
Static Torque	39 N?m {4 kgf?m}	
Continuous r.p.m.	700~8000 r.p.m.	
Belt	Type A	

CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL CORP AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.

SURFACE FINISHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 1	WORKING PROCESS	APPD E.Maejima	DATE Nov.10/93	SIZE A2
▽ 50S	RANGE 0.5 0.1	MATERIAL	CHKD T.Ishimaru	DATE Nov.10/93	SCALE 1/1
▽ 25S	6 30 ± 0.2	MATERIAL CODE	CHKD H.Yoshihara	DATE Nov.10/93	
▽ 12S	30 120 ± 0.3	MATERIAL SIZE	CUSTOMER EX		
▽ 6.3S	120 315 ± 0.5	HEAT TREAT	MODEL MS-5 1/2A-1GEX		
▽ 0.8S	315 1000 ± 0.8	SURFACE TREAT	ASSY NO		
HISTORY	50899500	PLANT	NAME		
ISSUE NO	2	PARTS CODE	MAGNETIC CLUTCH		
ISSUE DATE		OGURA CLUTCH Co.,LTD.	50899500	0.5	