


REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
02	5 Change Ball Bearing, etc.	(1) 2 Next assemble	Sep.05/94	N.S.	T.I.
03	3 Careless Mistakes	(1) 4 Be executed	M.M.M.	H.S.	M.K.

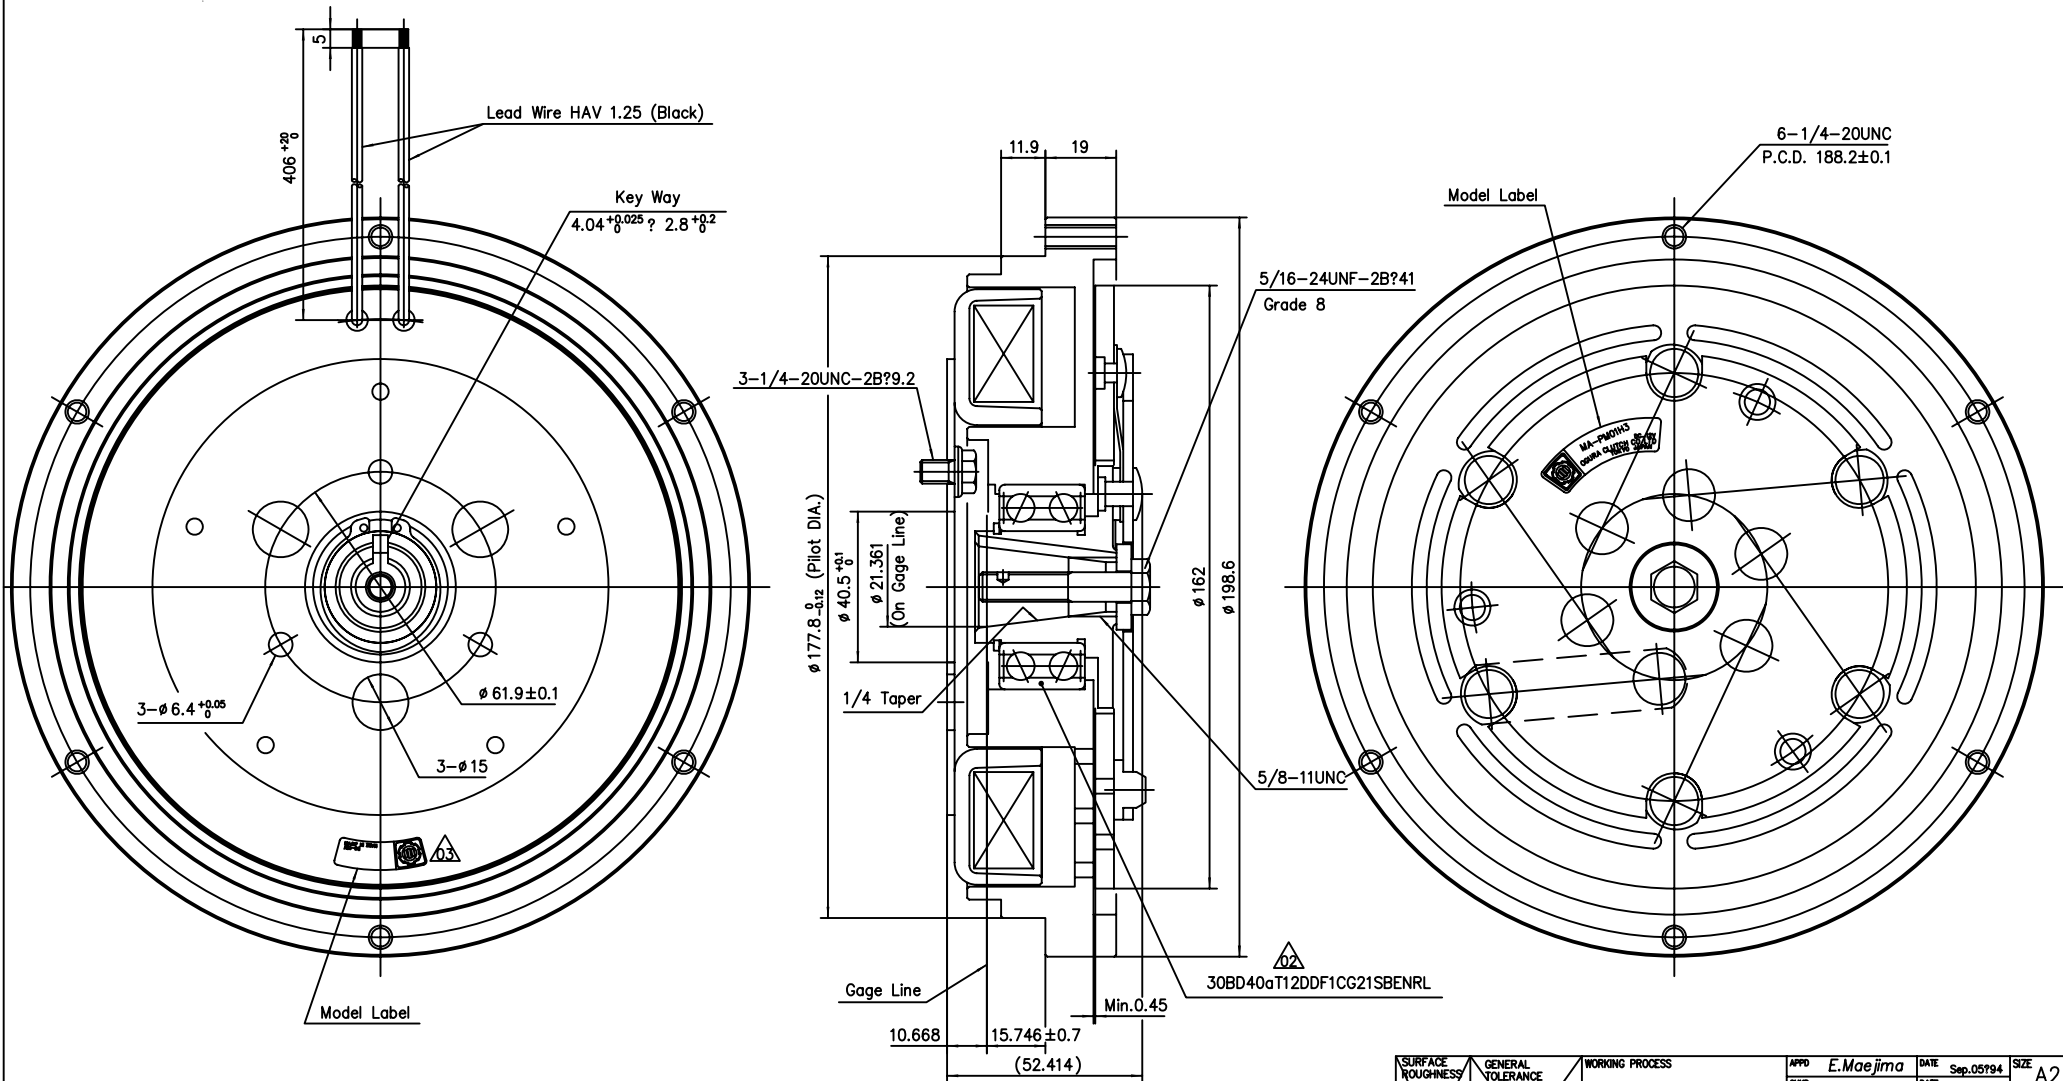

SPECIFICATION	
Exciting Voltage	D.C. 12 V
Power Consumption	Max. 50.0 W
Static Torque (Final)	237 N $\cdot$ m (175 lb $\cdot$ ft)

REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14			WORKING PROCESS		APPD	E.Maejima	DATE	Sep.05/94	SIZE	A2
	RANGE		TOL.	MATERIAL		CHKD	T.Ishimaru	DATE	Sep.05/94	SCALE	1/1
	▽ 50S	0.5	6 ± 0.1	MATERIAL		DWN	H.Yoshihara	DATE	Sep.05/94		
	▽▽ 25S	6	30 ± 0.2	MATERIAL		CUSTOMER					
	▽▽▽ 12S	30	120 ± 0.3	MATERIAL		MODEL		MA-PM01H3			
▽▽▽ 6S	120	315 ± 0.5	MATERIAL		ASSY NO						
▽▽▽ 0.8S	315	1000 ± 0.8	HEAT TRTM		0	NAME		MAGNETIC CLUTCH			
HISTORY		SURFACE TRTM		PARTS CODE		DWG NO		50919000		SHT. /	
ISSUE NO		PLANT	2	OGURA CLUTCH Co.,LTD.							
ISSUE DATE											