
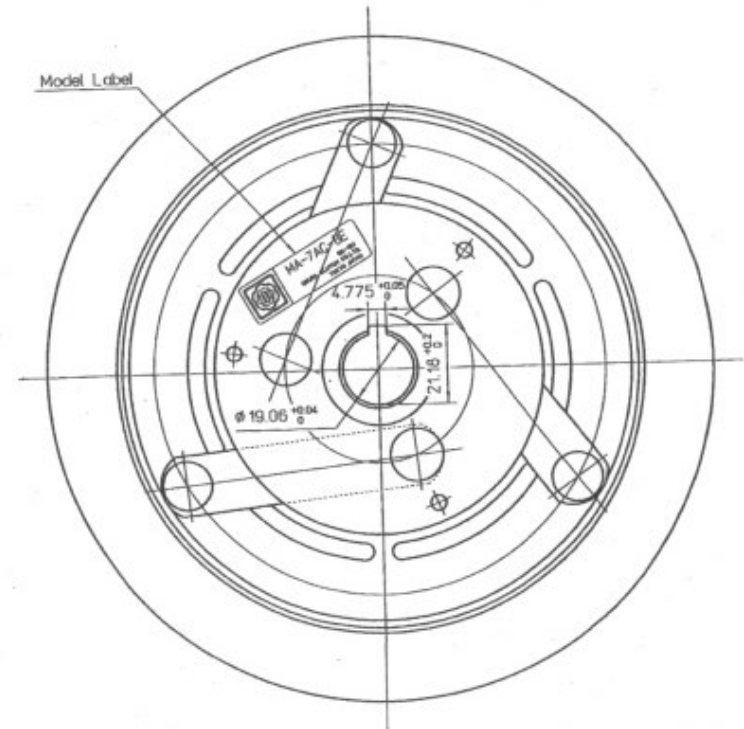


REV	REVISION STATUS	NOTE	DATE	CHK	BY
9	Change Ball Bearing	(1) 9 Others	Aug 2008	H.A.	Y.K.

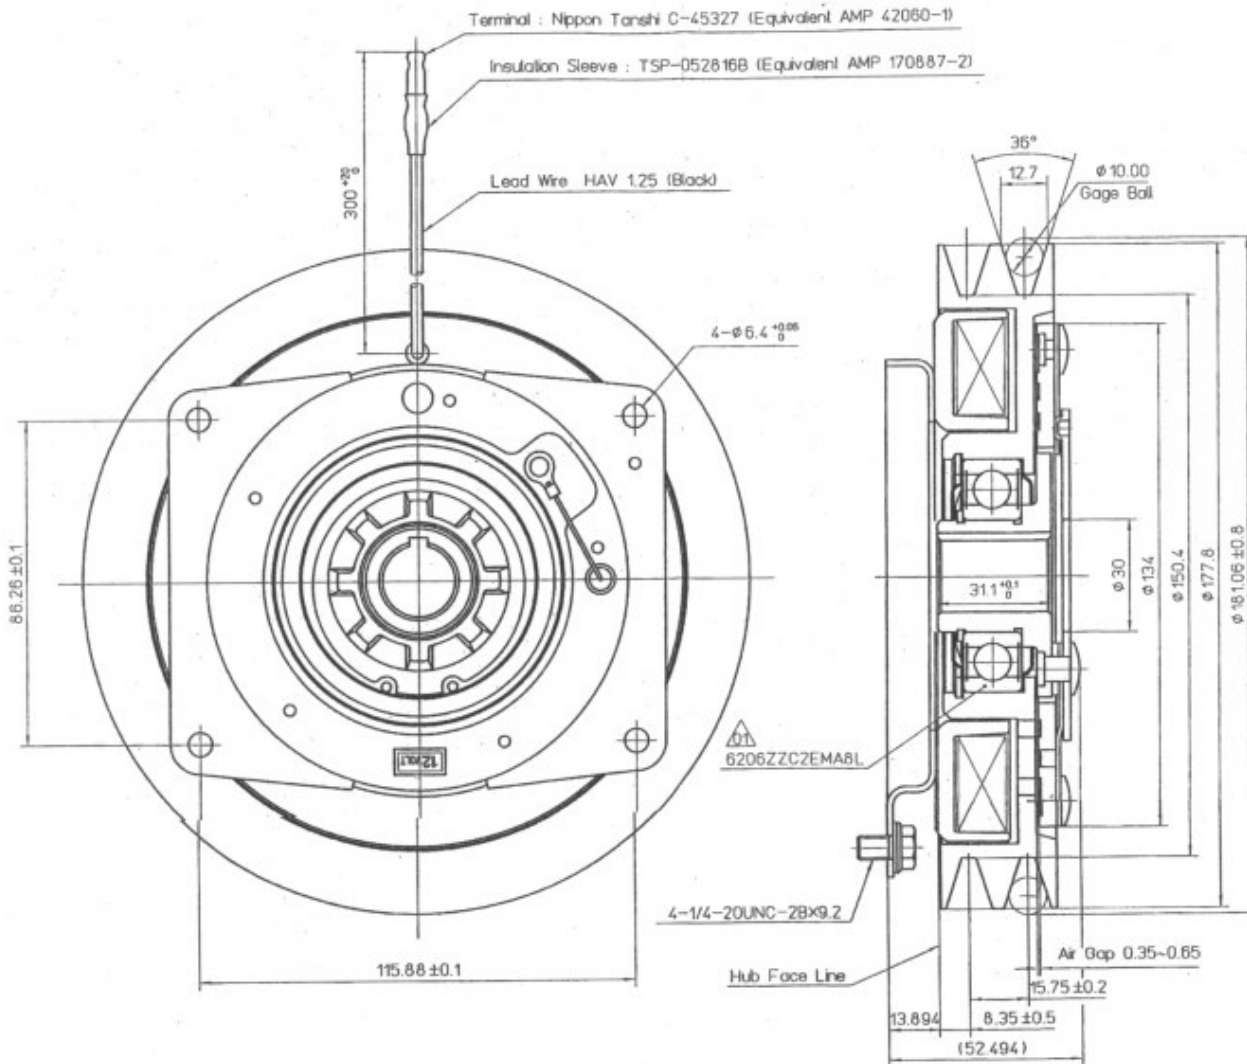

SPECIFICATION

Exciting Voltage	D.C. 12 V
Power Consumption	Max. 46.6 W
	(Cu Coil)

NOTES

Surface Treatment Black painting (cathodic electro-deposition)

Except following parts

Friction surface

Rivet (MFZn2-B)

Hub inner DIA

Field core coil assy (MFZn3)

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

SURFACE TOLERANCE UNLESS OTHERWISE SPECIFIED		GENERAL TOLERANCE FOR CLASS		WORKING PROCESS		APPD	E. Maejima	DATE	May 15 1994	SIZE	A2
RANGE		TOL.		MATERIAL		DRD	T. Ishimaru	DATE	May 15 1994	SCALE	
φ 1/505		0.5 ± 0.1		MATERIAL		DRW	H. Yoshinaka	DATE	May 15 1994	1 / 1	
φ 1/255		0.5 ± 0.2		MATERIAL		CUSTO					
φ 1/125		0.5 ± 0.3		MATERIAL		MODEL		MA-7AC-BE			
φ 1/63		0.5 ± 0.5		MATERIAL		ASSY NO					
φ 1/32		0.5 ± 0.8		MATERIAL		NAME		MAGNETIC CLUTCH			
φ 1/16		0.8 ± 0.8		MATERIAL		ISSUE NO		51716200			
φ 1/8		0.8 ± 0.8		MATERIAL		ISSUE DATE		OGURA CLUTCH Co., LTD.			