
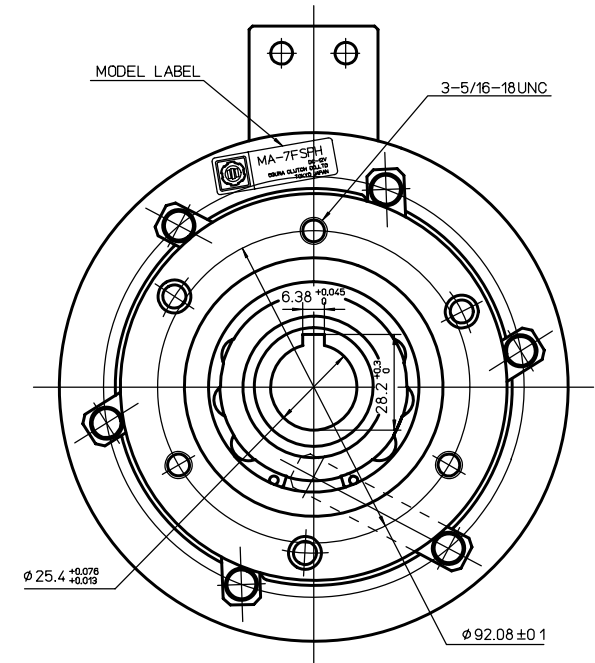
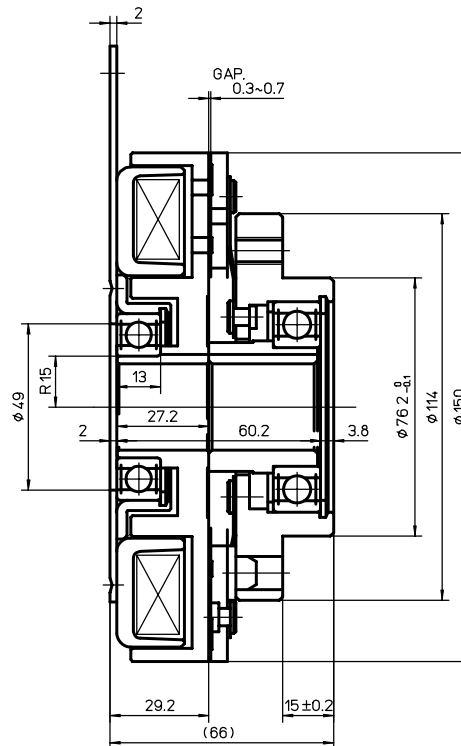


REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
△					
△					
△					

CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

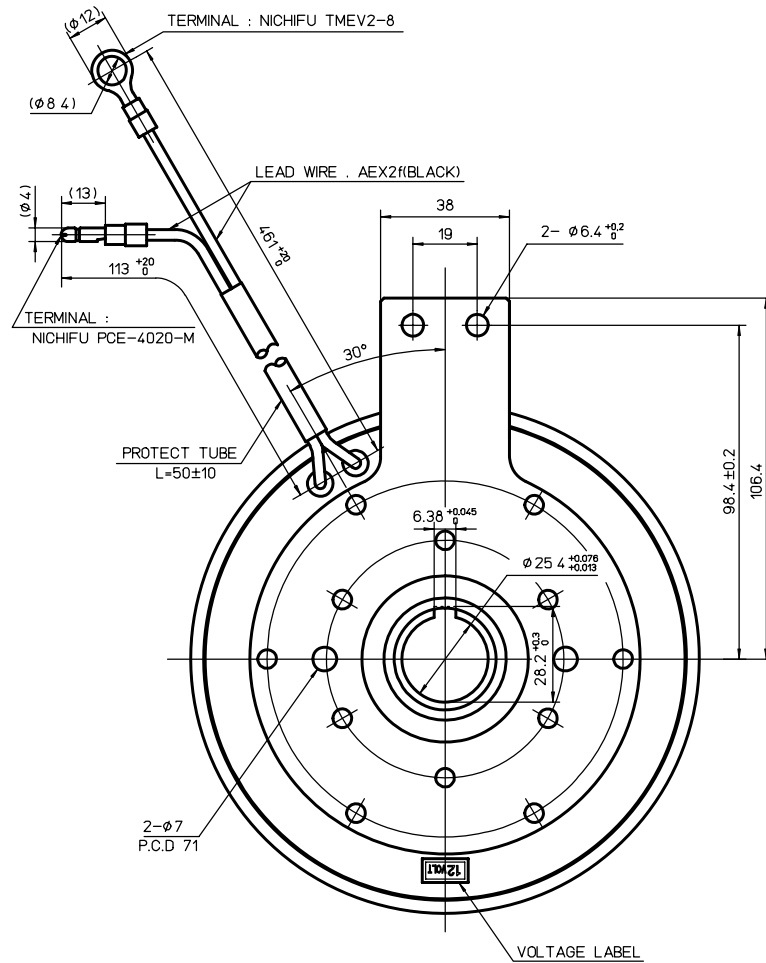

SPECIFICATIONS

- EXCITING VOLTAGE : D.C. 12 V
- POWER CONSUMPTION : MAX. 48 W
- STATIC TORQUE (FINAL)
: 149 N·m (110 LB·FT)
(COPPER COIL)

NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- FRICTION SURFACE
- RIVET (MFZn2-B)
- HUB INNER DIA.
- FIELD CORE COIL ASSY (MFZn3)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 2	WORKING PROCESS	APPROVED BY	DATE	SIZE
	RANGE	EDGE/CORNER BREAKS MAX. 0.2 UNLESS NOTED	CHECKED BY	DATE	SCALE
	TOL.	MATERIAL	DRAWN BY <i>Y. Saito</i>	DATE 11.04 '97	1
	OVER 0.5 TO 6	MATERIAL CODE	CUSTOMER	DATE 11.04 '97	1
▽	50S	SIZE	MODEL	MA-7FSPH	
▽▽	25S	HEAT TREAT	ASSY NO.		
▽▽▽	6S	SURFACE TREAT	NAME	MAGNETIC CLUTCH	
▽▽▽▽	3S	PARTS CODE	DWG. NO.	52035400	
▽▽▽▽▽	0.8S	PLANT	ISSUE DATE	OGURA CLUTCH Co.LTD.	
HISTORY	2				