
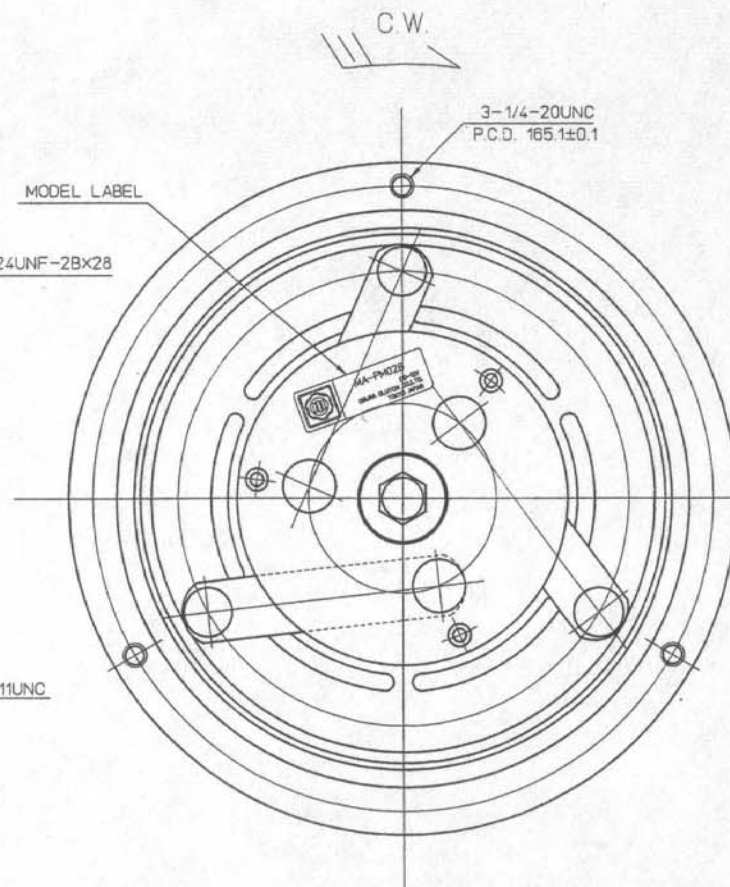
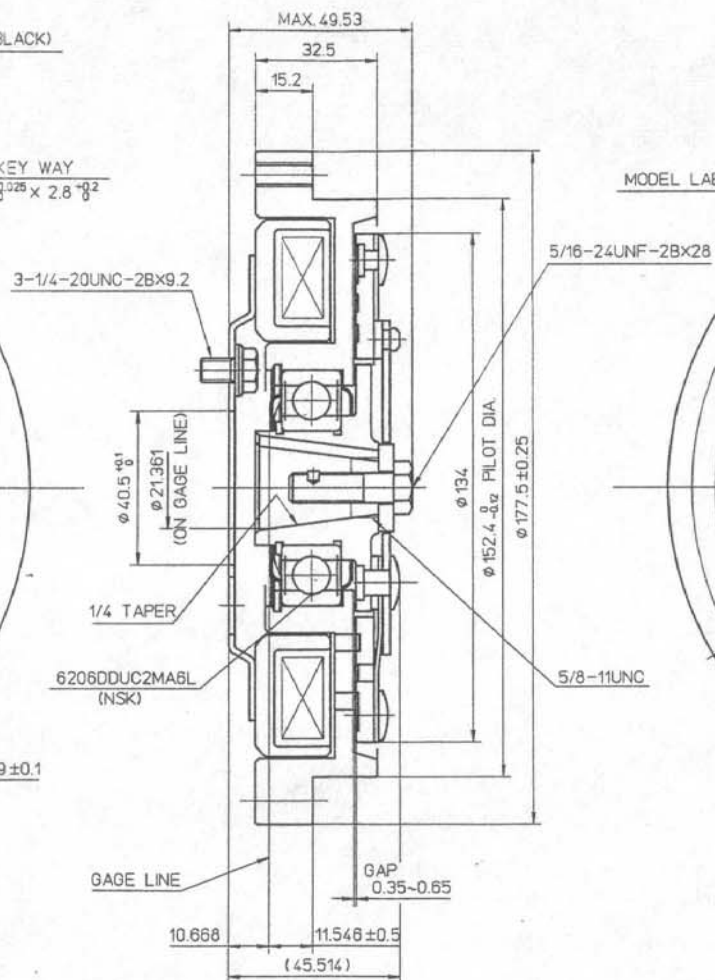


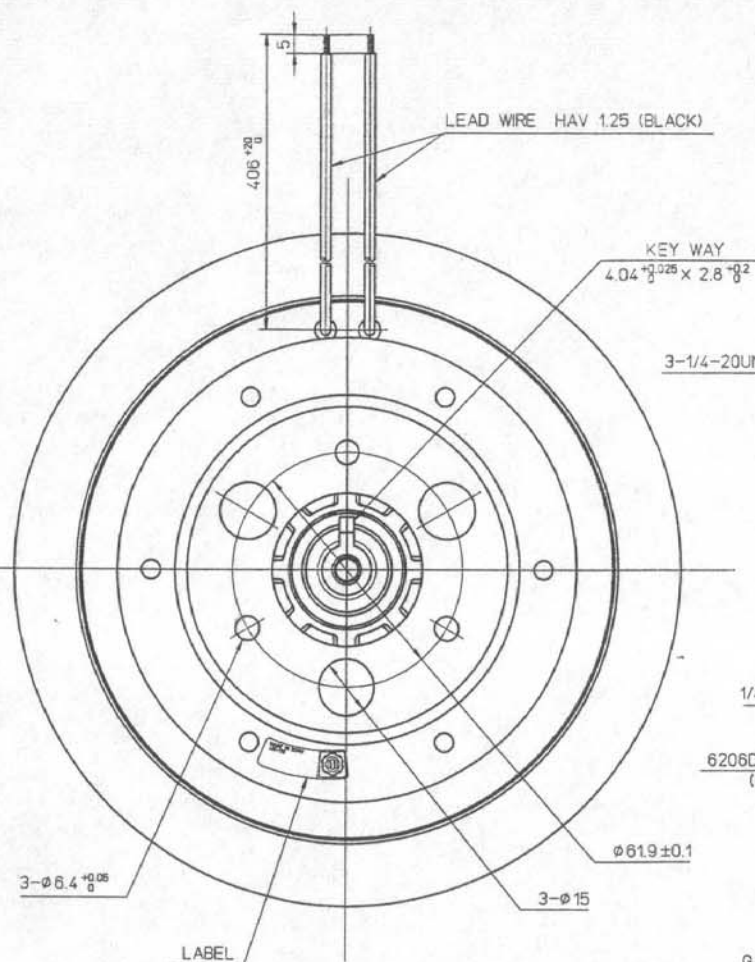

SPECIFICATIONS

1. EXCITING VOLTAGE : D.C. 12 V
2. POWER CONSUMPTION : MAX. 45 W
3. STATIC TORQUE (FINAL)
75 FT · LB (101 N · m)

NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- ARMATURE FRICTION SURFACE
- RIVET (MFZn2-B)
- HUB INNER DIA.
- FIELD CORE COIL ASSY (MFZn3)

CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP. AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIC.

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED		GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS		APPROVED BY <i>Aug 28 '97</i>		DATE <i>Aug 28 '97</i>		SIZE <i>A2</i>	
RANGE		TOL.		MATERIAL		CHECKED BY <i>Aug 28 '97</i>		DATE <i>Aug 28 '97</i>		SCALE <i>1/1</i>	
▽	50S	0.5	0.1	MATERIAL		DESIGNED BY <i>Aug 28 '97</i>		DATE <i>Aug 28 '97</i>			
▽▽	25S	0.3	0.2	MATERIAL		DRAWN BY <i>Aug 28 '97</i>		DATE <i>Aug 28 '97</i>			
▽▽▽	6S	0.2	0.1	MATERIAL		CUSTOMER					
▽▽▽▽	3S	0.1	0.05	MATERIAL		MODEL					
▽▽▽▽▽	0.8S	0.05	0.02	MATERIAL		ASSY NO					
HISTORY		SURFACE TREATMENT		HEAT TREATMENT		NAME					
ISSUE NO		PLANT		PARTS CODE		MAGNETIC CLUTCH					
ISSUE DATE		2		5913100000		OGURA CLUTCH Co.LTD.					
						52044600					