
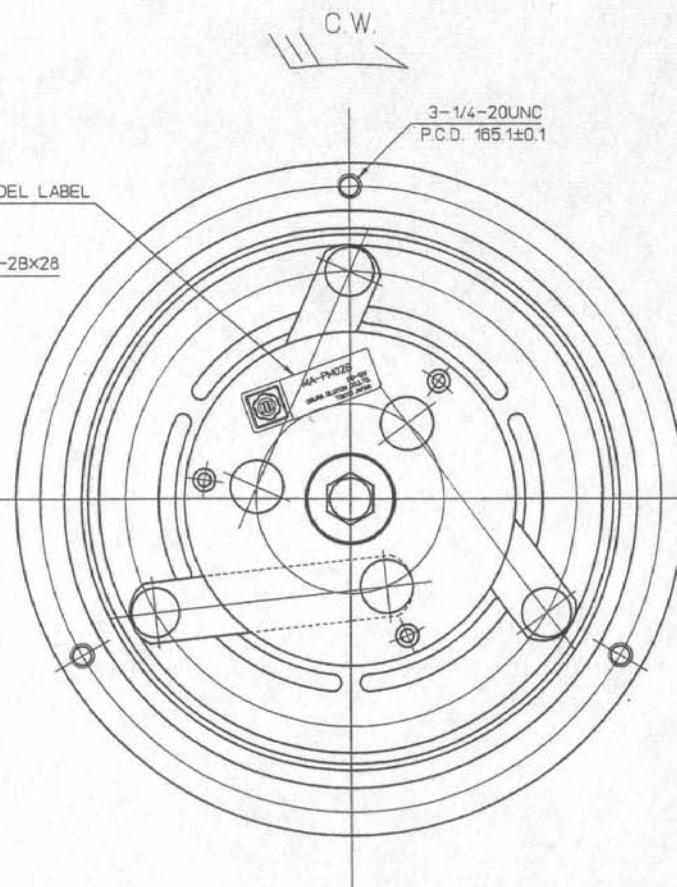
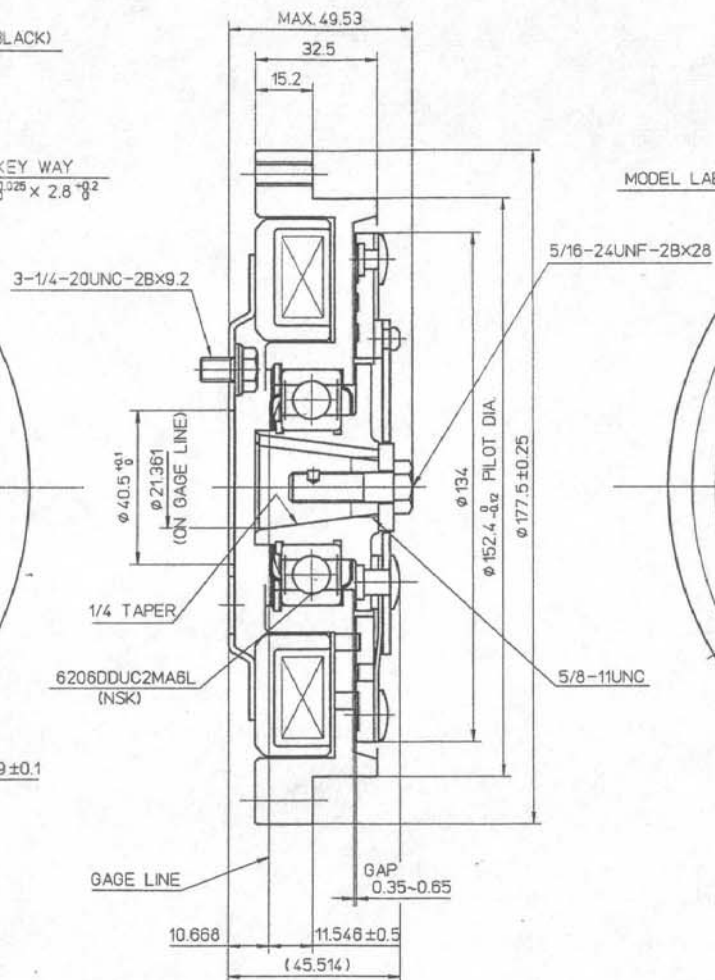


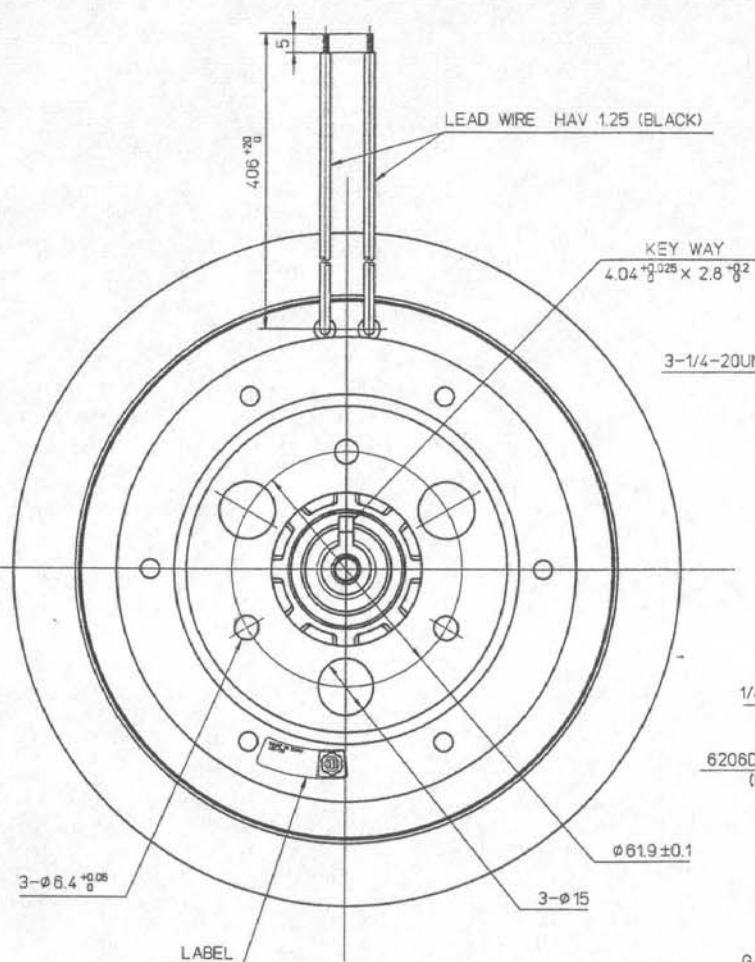

SPECIFICATIONS

1. EXCITING VOLTAGE : D.C. 12 V
2. POWER CONSUMPTION : MAX. 45 W
3. STATIC TORQUE (FINAL)
75 FT.-LB (101 N.m)

NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- ARMATURE FRICTION SURFACE
- RIVET (MFZn2-B)
- HUB INNER DIA.
- FIELD CORE COIL ASSY (MFZn3)

CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIC.

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED		GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS		APPROVED BY <i>P. S. S. S. S.</i>		DATE <i>Aug 28 '97</i>	SIZE <i>A2</i>
		RANGE		TOL.		EDGE/CORNER BREAKS MAX. 0.2 UNLESS NOTED		DATE <i>Aug 28 '97</i>	SCALE
▽	50S	OVER 0.5	10	8	± 0.1	MATERIAL			
▽▽	25S	5	30	± 0.2	MATERIAL				
▽▽▽	6S	30	120	± 0.3	MATERIAL				
▽▽▽▽	3S	120	315	± 0.5	MATERIAL				
▽▽▽▽▽	0.8S	315	1000	± 0.8	MATERIAL				
HEAT TREAT						0			
SURFACE TREAT						0			
HISTORY									
ISSUE NO		PLANT		2		PARTS CODE		5913100000	
ISSUE DATE		CGURA CLUTCH Co.,LTD.							
NAME						MAGNETIC CLUTCH			
DWG. NO						52044600 			
						SHT. /			