


REV.	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
5	Delete retaining rings. Change form	(21) 2	Next assemble	No. 003	SS/KB

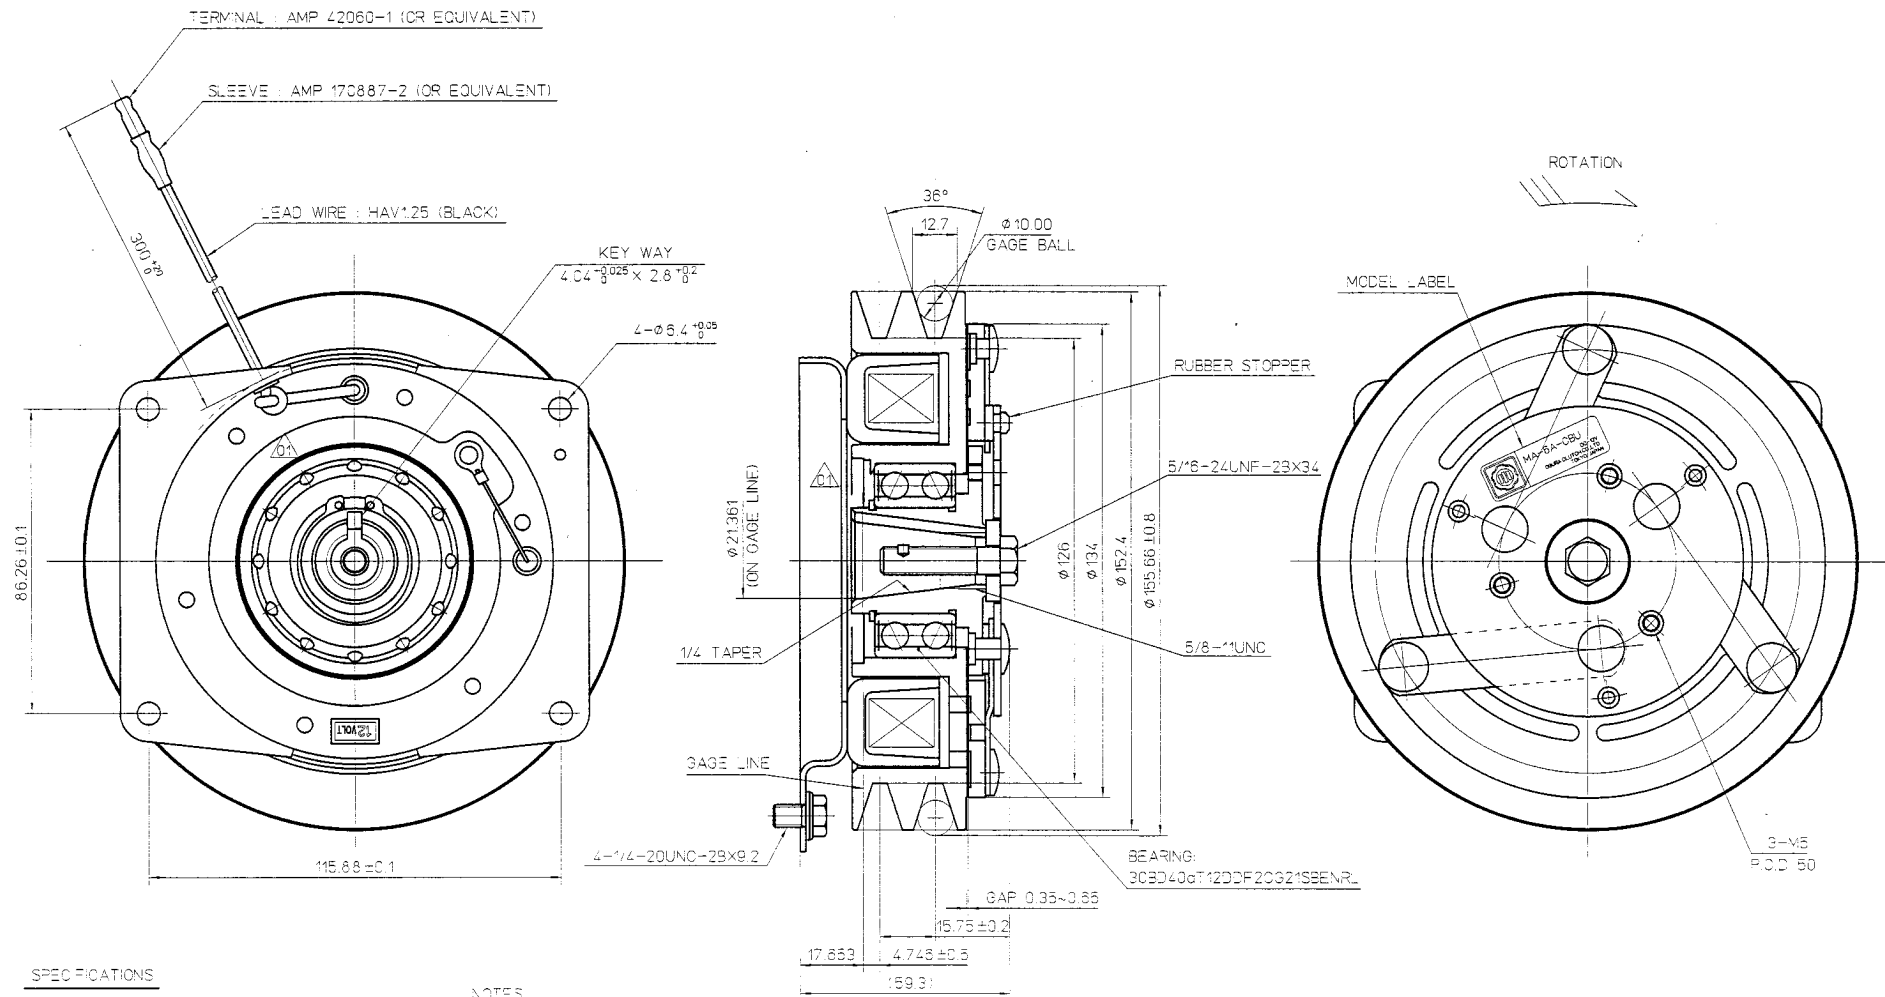

SPECIFICATIONS

1. EXCITING VOLTAGE: 0.012 V
2. STATIC TORQUE
INITIAL: 39 N·m (4.0 kgm)
AFTER BURNISHING: 108 N·m (11 kgm)
3. POWER CONSUMPTION: MAX 47 W
4. ROTATION: C.W.

NOTES

- SURFACE TREATMENT
BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
FRICTION SURFACE
RIVET (MFZn2-9)
HUB INNER DIA.
FIELD CORE COIL ASSY (MFZn3)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE RANGE	WORKING PROCESS	APPROVED BY	DATE	SHEET
Ø 1/50S	Ø 0.5 ~ 0.8 ± 0.1	WATER	CHECKED BY	Nov 22, 1997	A2
Ø 1/25S	Ø 0.8 ~ 1.2 ± 0.2	WATER	DESIGNED BY	Nov 22, 1997	1
Ø 1/10S	Ø 1.2 ~ 1.5 ± 0.3	WATER	DRAWN BY	Nov 22, 1997	
Ø 1/5S	Ø 1.5 ~ 2.0 ± 0.5	WATER	CUSTOMER		
Ø 1/2S	Ø 2.0 ~ 3.0 ± 0.8	WATER	MODEL	MA-6A-CBU	
Ø 1/1S	Ø 3.0 ~ 4.0 ± 1.0	WATER	ASSY NO.		
Ø 1/0.5S	Ø 4.0 ~ 5.0 ± 1.2	WATER	NAME	MAGNETIC CLUTCH	
Ø 1/0.2S	Ø 5.0 ~ 6.0 ± 1.5	WATER	PARTS CODE	5213100000	
Ø 1/0.1S	Ø 6.0 ~ 7.0 ± 1.8	WATER	ISSUE DATE	52062700	
Ø 1/0.05S	Ø 7.0 ~ 8.0 ± 2.0	WATER	ISSUE DATE	52062700	
Ø 1/0.02S	Ø 8.0 ~ 9.0 ± 2.2	WATER	ISSUE DATE	52062700	
Ø 1/0.01S	Ø 9.0 ~ 10.0 ± 2.5	WATER	ISSUE DATE	52062700	