


REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
04	6	Change Ball bearing.	(1)	2	Next assemble
05	6	Delete cover. Add dimension.	(3)	2	Next assemble
06	1	Add note. (Change surface treatment)	(1)	2	Next assemble


REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

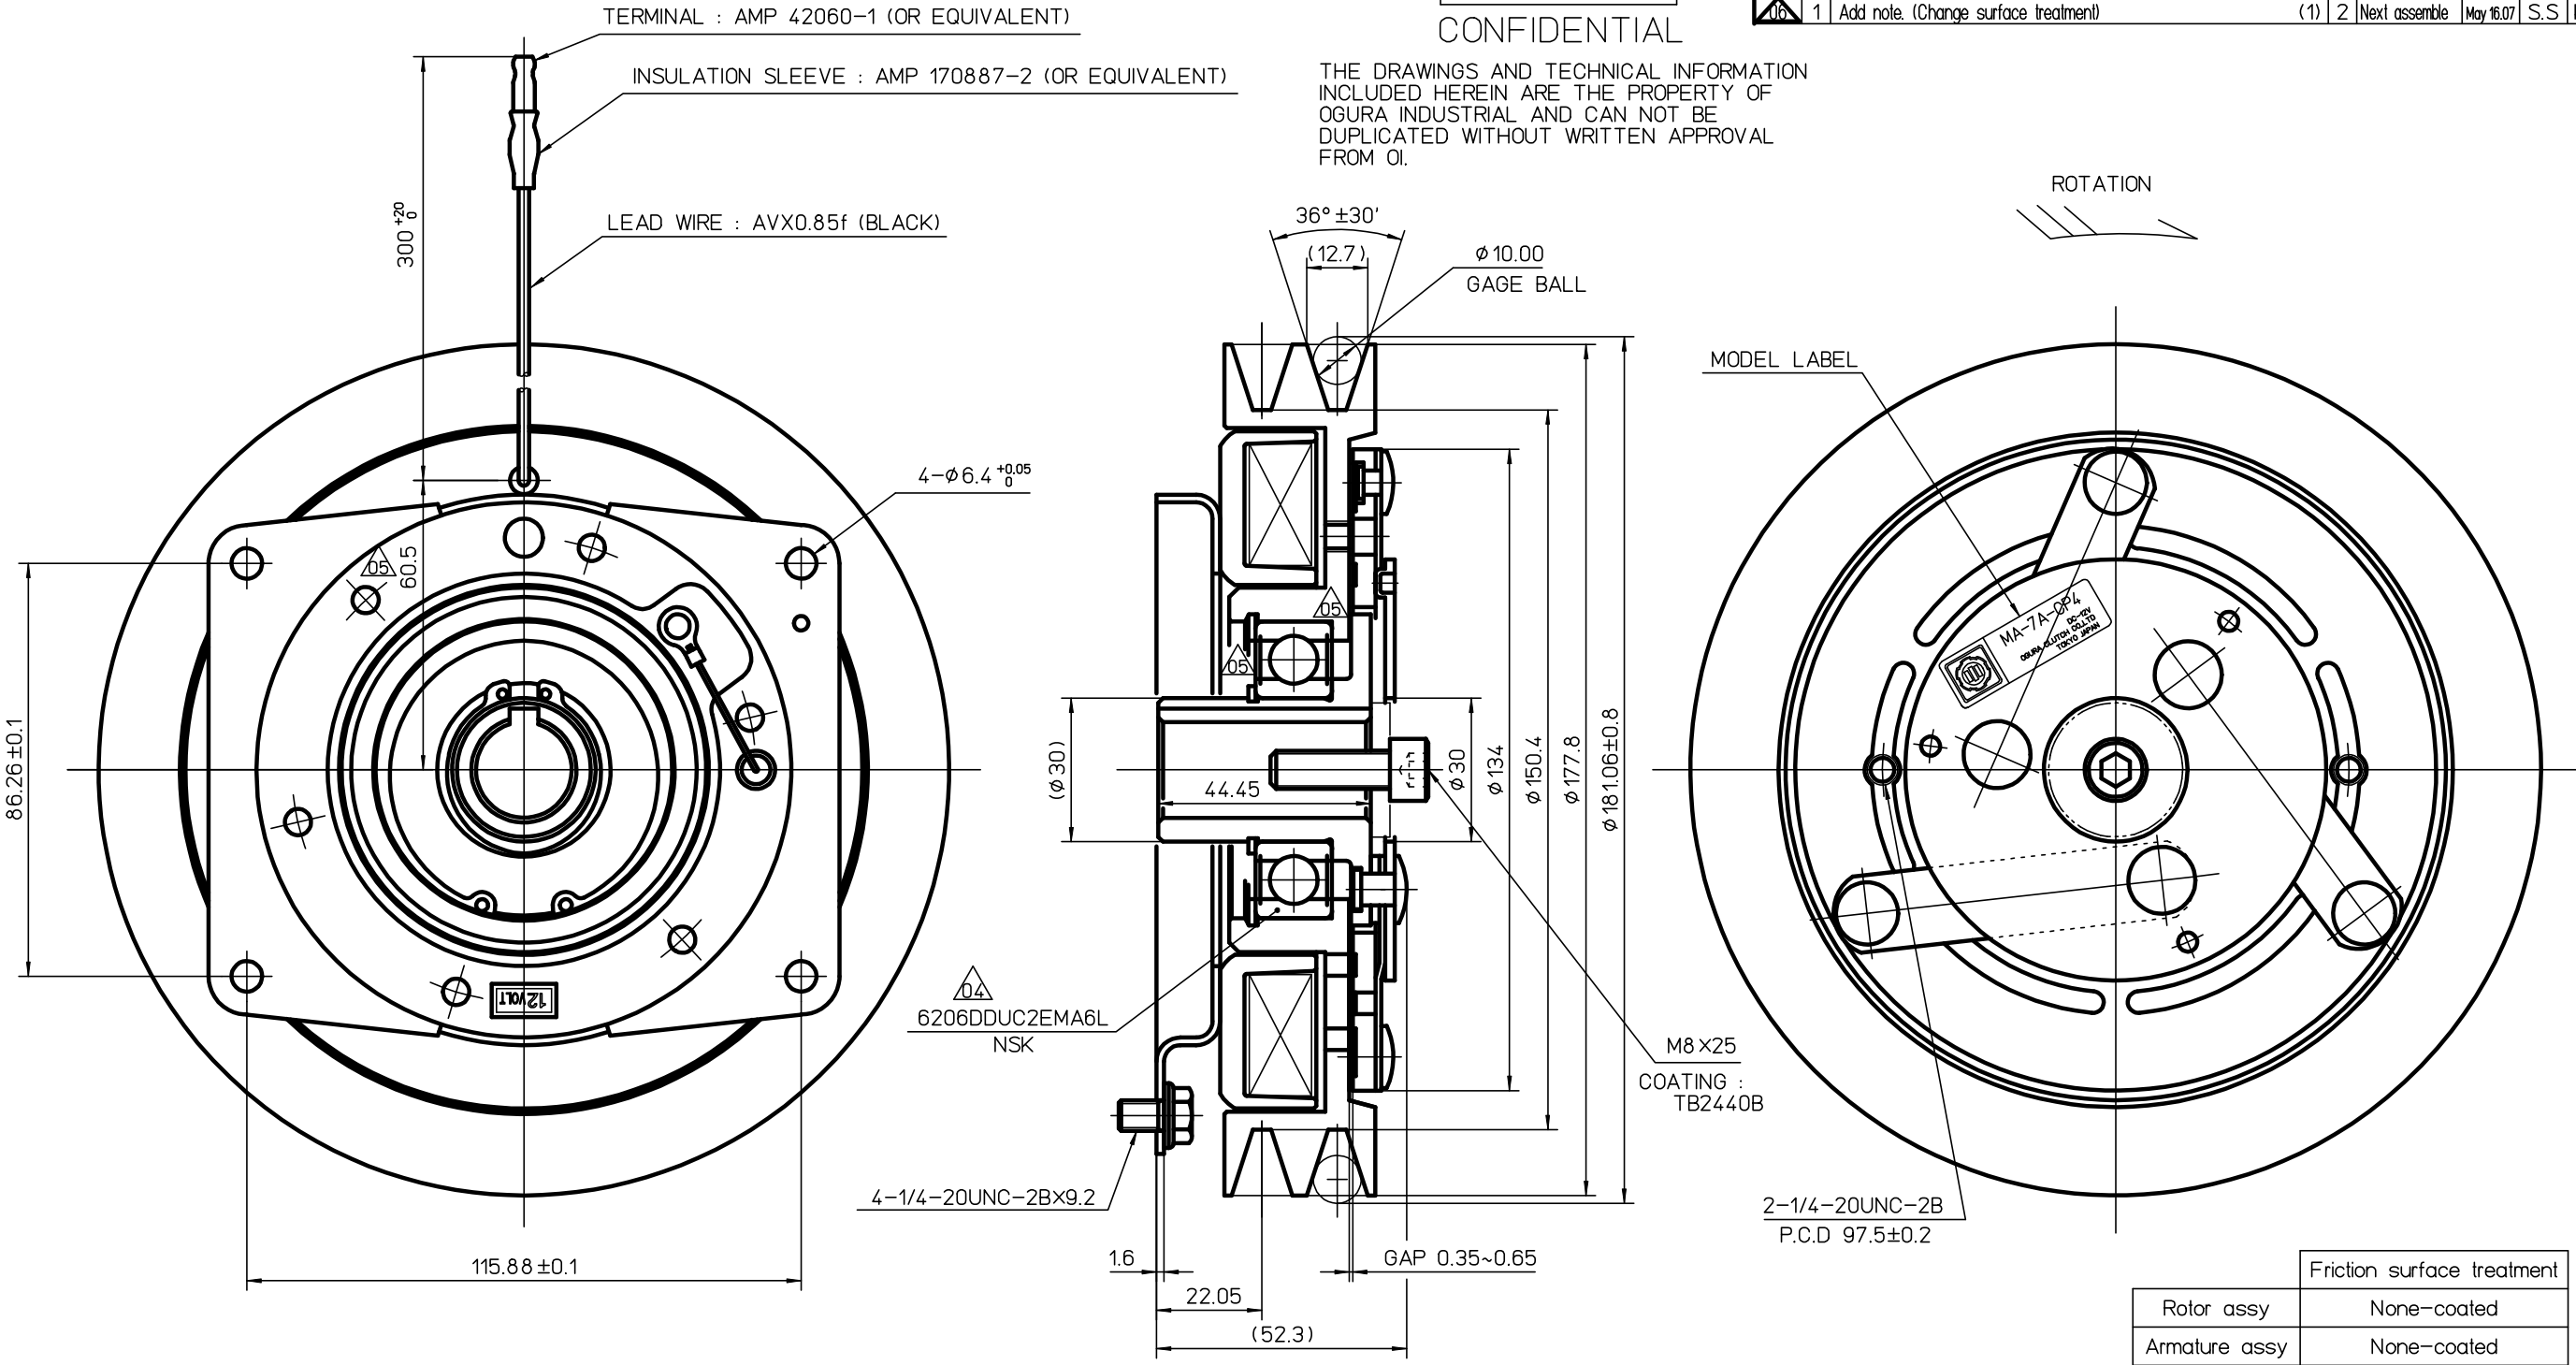

SPECIFICATIONS(at 20°C)

- EXCITING VOLTAGE : D.C.12 V
 - POWER CONSUMPTION : MAX.43 W
 - STATIC TORQUE
 - INITIAL : 39 N·m
 - FINAL : NOMINAL 101 N·m
- (ALUMINUM COIL)

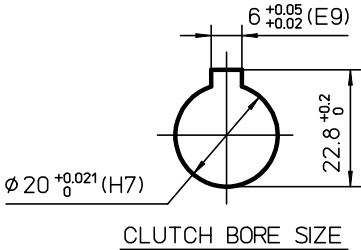

NOTE

- Hex-chrome free zinc plating : 3MFZn8 (Rivet and Bolt : 3MFZn5)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS		APPROVED BY	E. Maejima	DATE	Feb.11.1998	SIZE	A2
	RANGE		TOL.		CHECKED BY	H. Ishiuchi	DATE	Feb.11.1998	SCALE	1 / 1
	OVER 0.5 TO 0.6		± 0.1		DESIGNED BY	S. Sasaki	DATE	Feb.10.1998		
	▽ 50S				DRAWN BY	S. Onda	DATE	Feb.09.1998		
	▽▽ 25S		6 30 ± 0.2		CUSTOMER		EX			
	▽▽▽ 6S		30 120 ± 0.3		MODEL		MA-7A-CP4			
	▽▽▽▽ 3S		120 315 ± 0.5		ASSY NO					
	▽▽▽▽▽ 0.8S		315 1000 ± 0.8		NAME		MAGNETIC CLUTCH			
	HISTORY		52088900 06		DWG NO		52088900 06			
ISSUE NO		PLANT 2		PARTS CODE		5913100000				
ISSUE DATE				OGURA CLUTCH Co.,LTD.						