
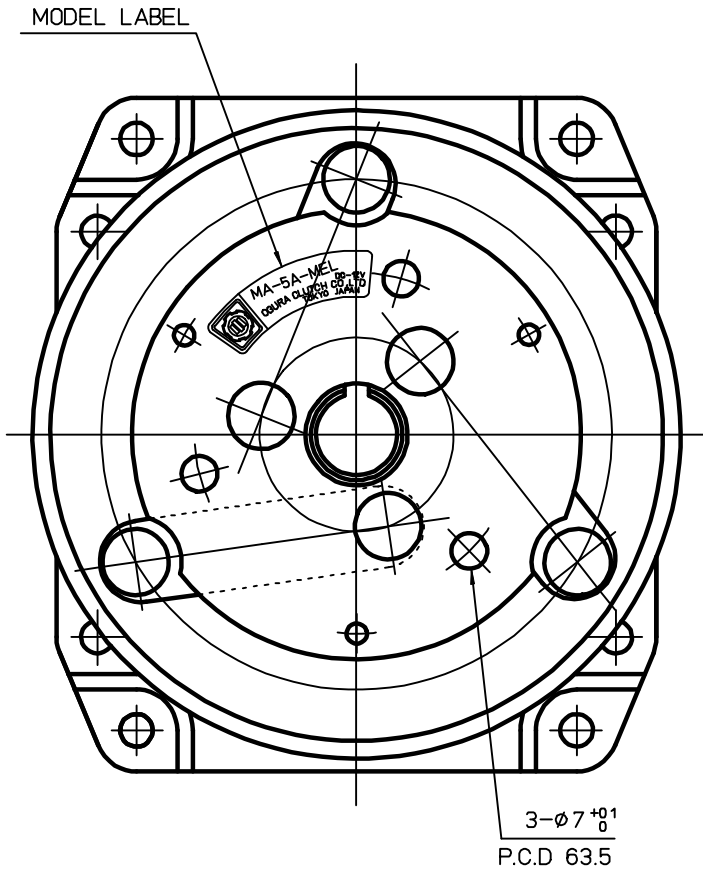


REV	REVISION STATUS			NOTE	DATE	CHG BY	CHK BY
9	Change Ball Bearing	(1)	9	Others	Jul.01	H.A	

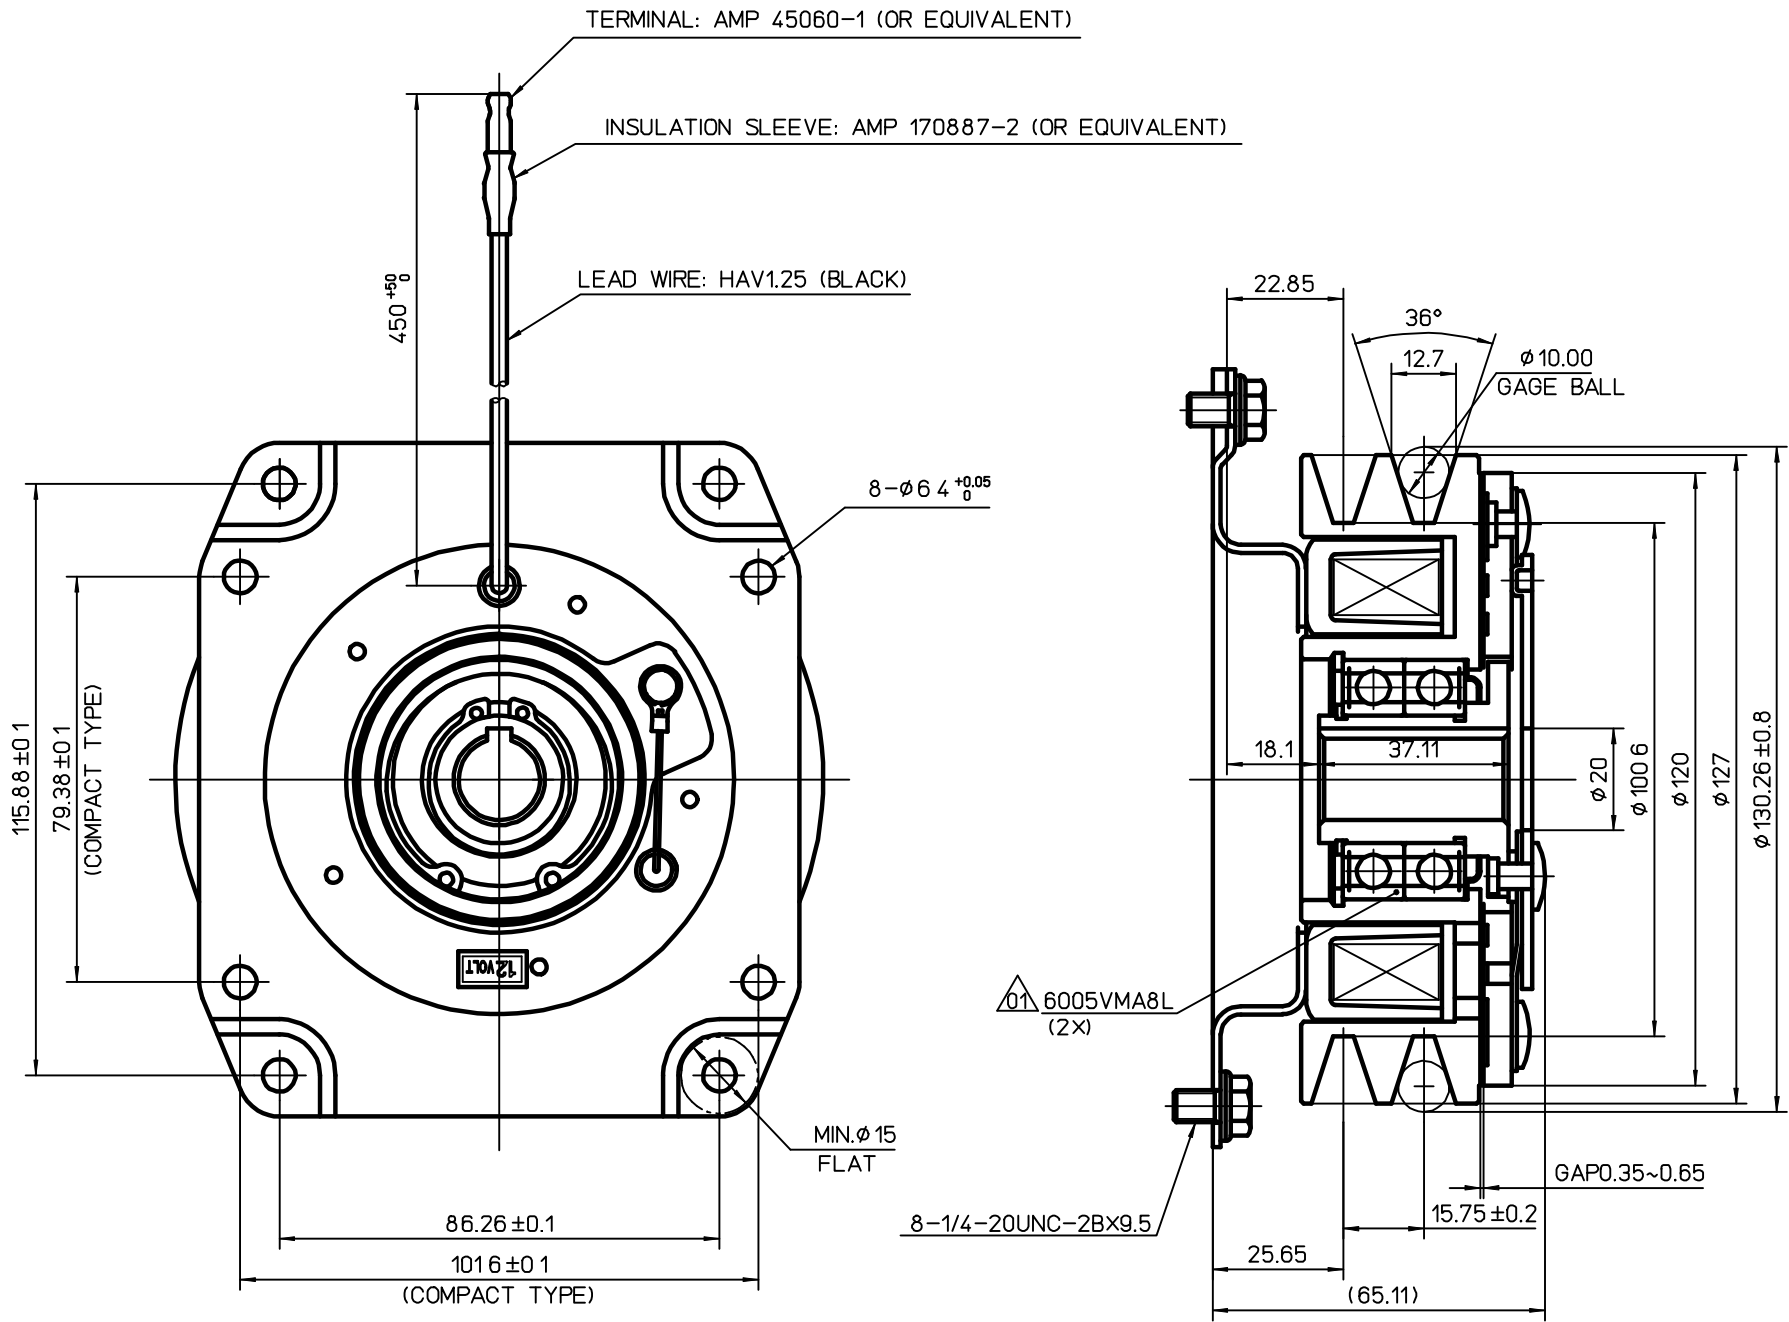

SPECIFICATIONS

- EXCITING VOLTAGE : D.C 12 V
- STATIC TORQUE
 - INITIAL : 30 N · m
 - AFTER BURNISHING : 79 N · m
- POWER CONSUMPTION : MAX.45 W
- ROTATION : C.W.

NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- FRICTION SURFACE
 - RIVET (MFZn2-B)
 - HUB INNER DIA.
 - FIELD CORE COIL ASSY (MFZn3)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS		APPROVED BY <i>E. Maejima</i>	DATE Nov.09.1998	SIZE A2
					CHECKED BY <i>M. Kikuchi</i>	DATE Nov.09.1998	SCALE
	RANGE		TOL.	DESIGNED BY <i>M. Kikuchi</i>		DATE Nov.06.1998	1 / 1
	OVER 0.5 TO 6		± 0.1	DRAWN BY <i>M. Kikuchi</i>		DATE Nov.06.1998	1 / 1
	▽ 5.0S		6 30 ± 0.2	CUSTOMER			
▽▽ 2.5S	30 120 ± 0.3	EX					
▽▽▽ 1.6S	120 315 ± 0.5	MODEL					
▽▽▽ 1.0S	315 1000 ± 0.8	MA-5A-MEL					
▽▽▽▽ 0.8S			HEAT TRTMT 0		ASSY NO		
HISTORY 52179200		SURFACE TRTMT 0		NAME			
ISSUE NO		PLANT 2	PARTS CODE 5913100000		MAGNETIC CLUTCH		
ISSUE DATE		OGURA CLUTCH Co.,LTD.		DWG NO		52179200	

出荷時のクラッチ吸引電圧は、D C 7.5V以下