


REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY
△					
△					
△					

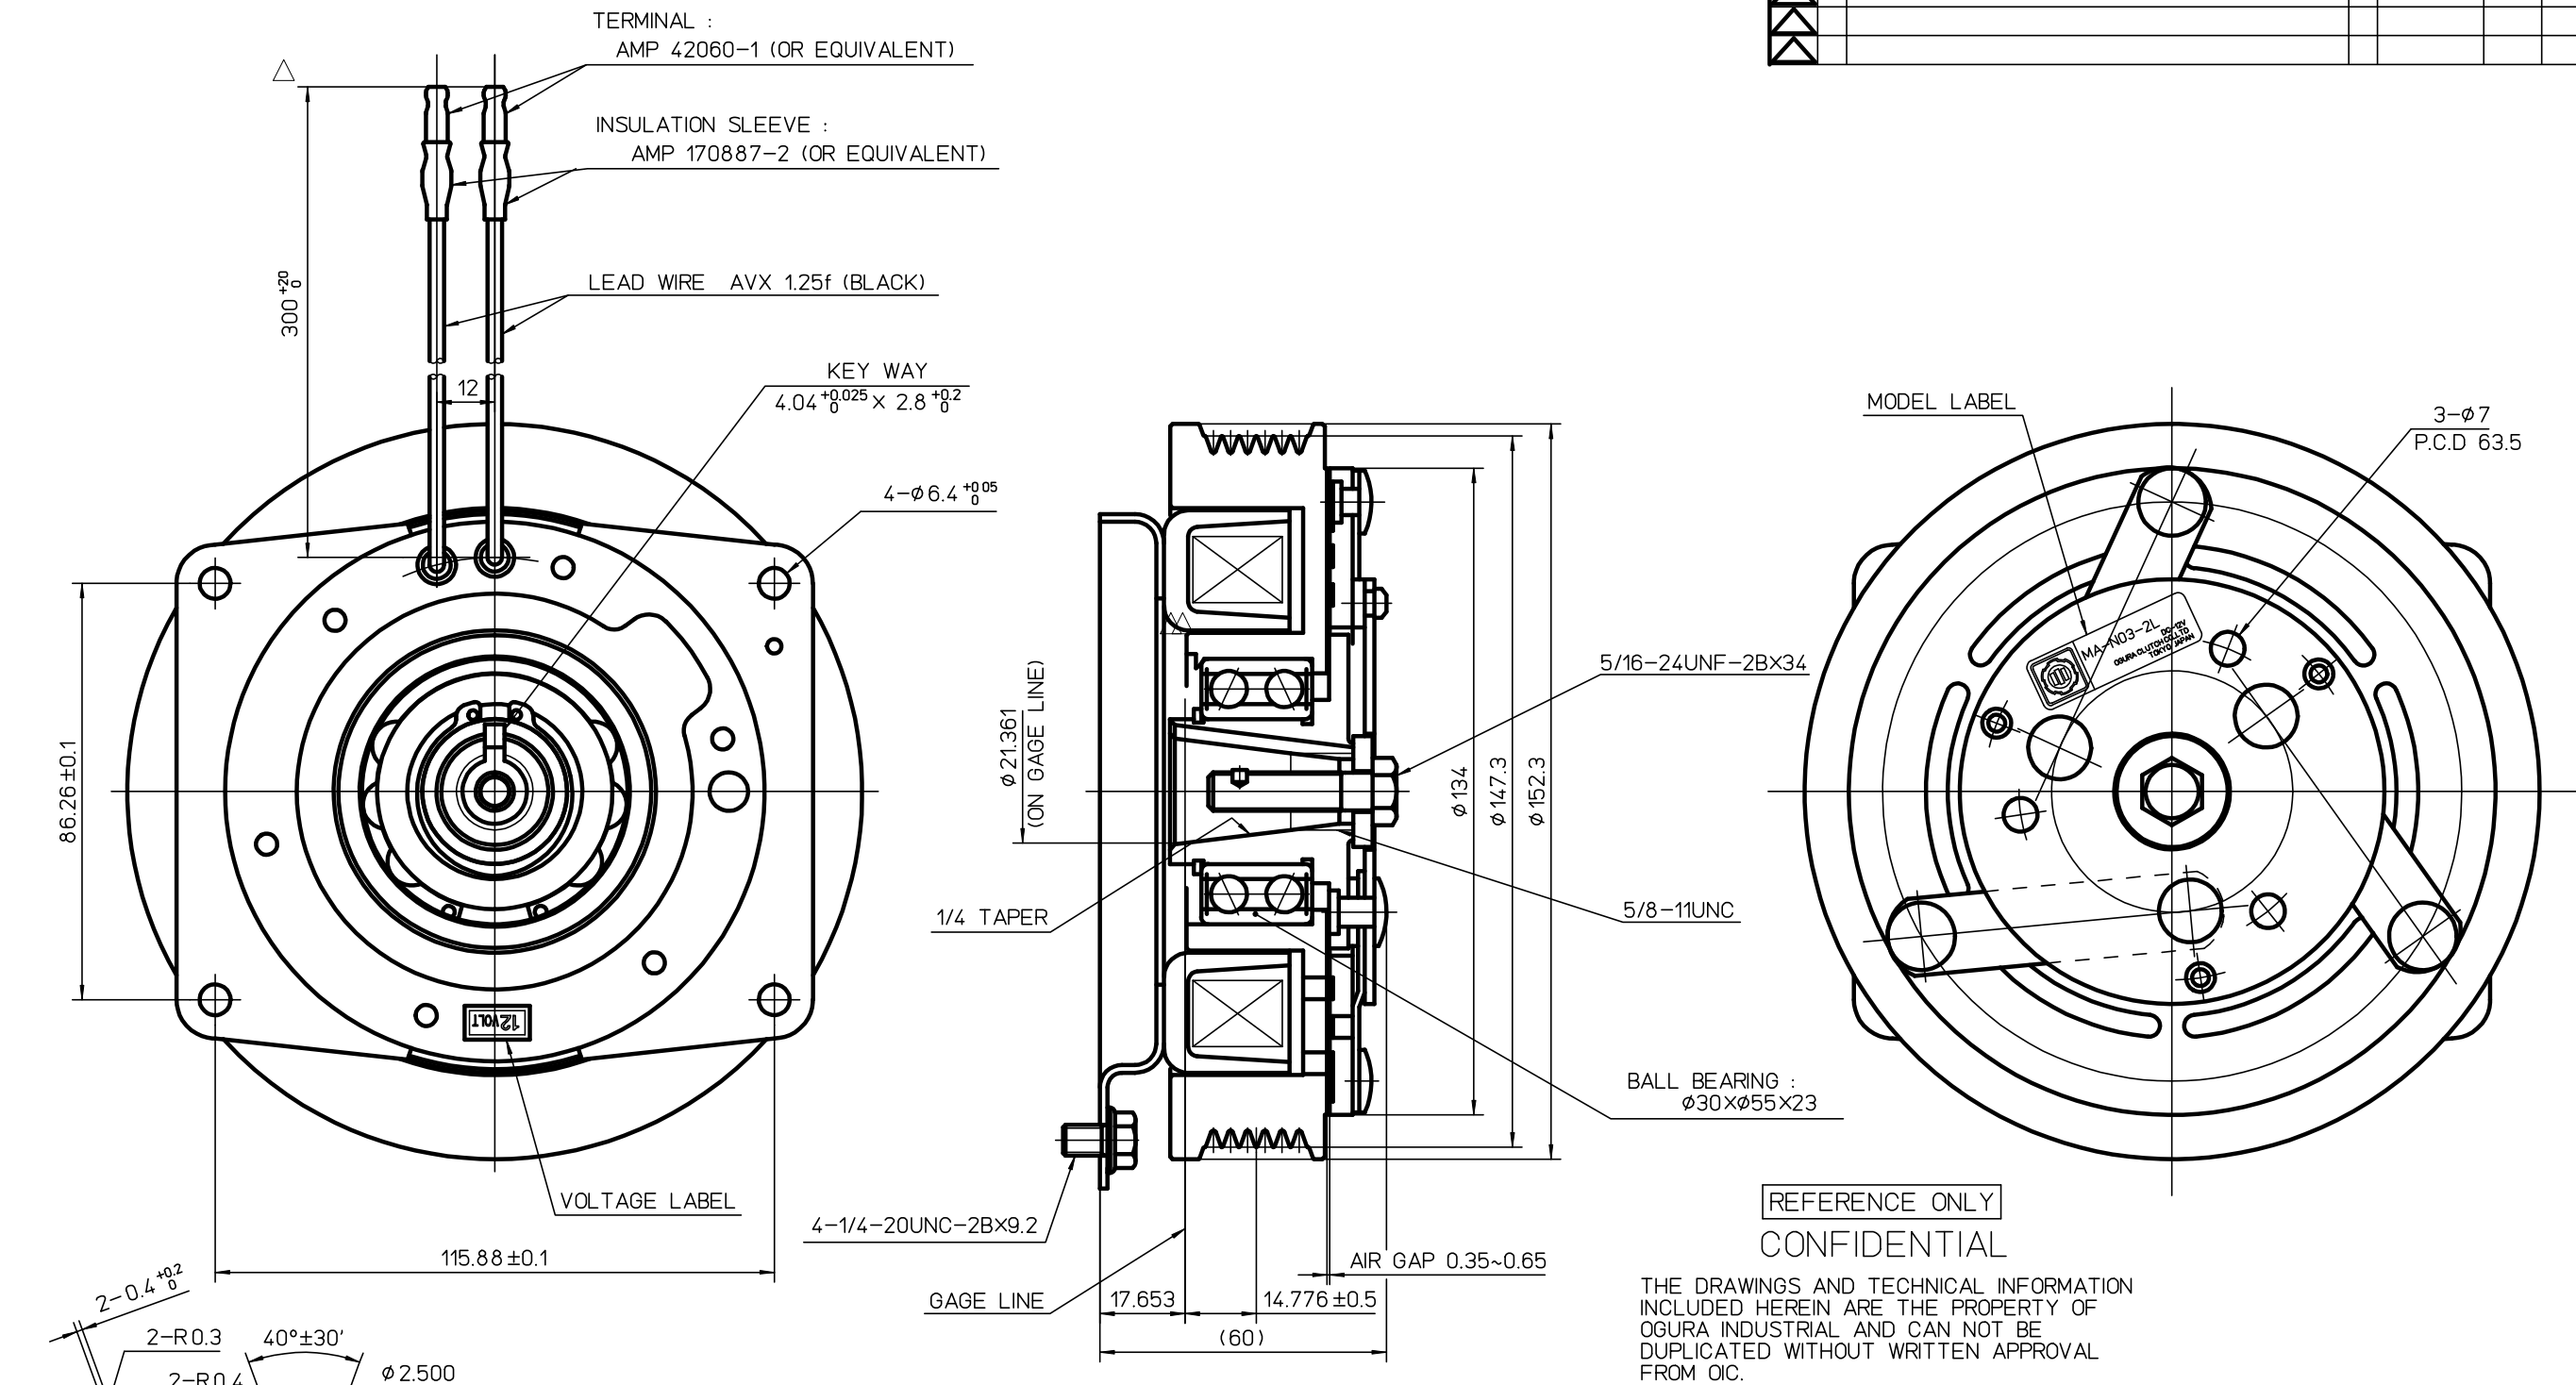

SPECIFICATIONS

- EXCITING VOLTAGE : D.C.12 V
- STATIC TORQUE
INITIAL : 39 N · m
AFTER BURNISHING : 101 N · m
- POWER CONSUMPTION : MAX.40 W
- ROTATION : C.W.
- WEIGHT :

NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- FRICTION SURFACE
 - RIVET (MFZn2-B)
 - HUB INNER DIA.
 - FIELD CORE COIL ASSY (MFZn3)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS	APPROVED BY	E.Maejima	DATE	Dec.23.1999	SIZE	A2 1 / 1
				CHECKED BY		DATE	Dec.23.1999	SCALE	
				DESIGNED BY		DATE	Dec.23.1999		
				DRAWN BY	S.Onda	DATE	Dec.22.1999		
				CUSTOMER	EX				
▽ 50S	OVER 0.5	TO 6 ± 0.1	MATERIAL	MODEL					
▽▽ 25S	6	30 ± 0.2	MATERIAL CODE	MA-N03-2L					
▽▽▽ 6S	30	120 ± 0.3	MATERIAL SIZE	ASSY NO					
▽▽▽▽ 3S	120	315 ± 0.5	HEAT TRT	0					
▽▽▽▽▽ 0.8S	315	1000 ± 0.8	SURFACE TRT	0					
HISTORY			52279700						
ISSUE NO	PLANT	2	PARTS CODE	5213100000					
ISSUE DATE			OGURA CLUTCH Co.,LTD.						
			52279700						
			00 /						