
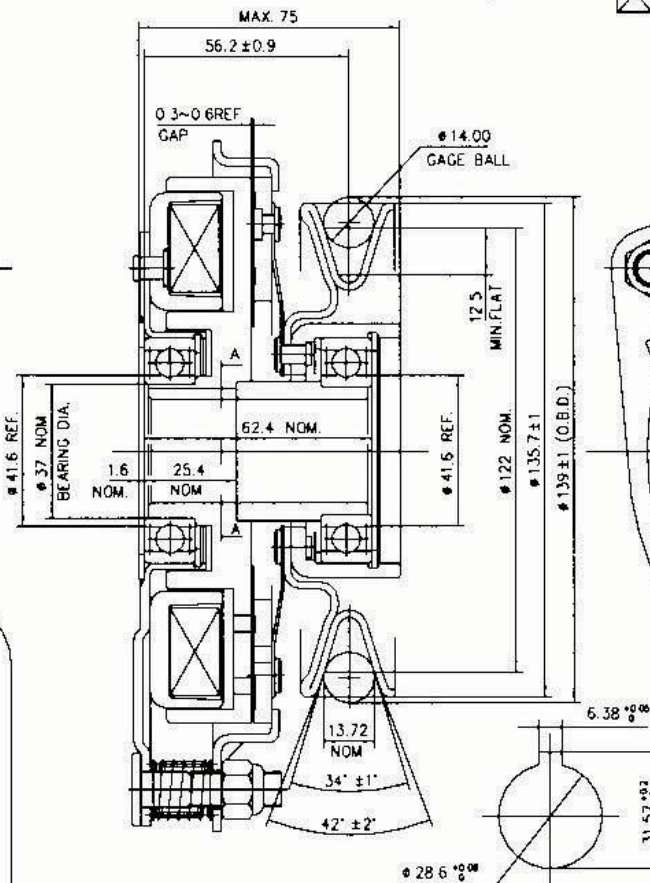


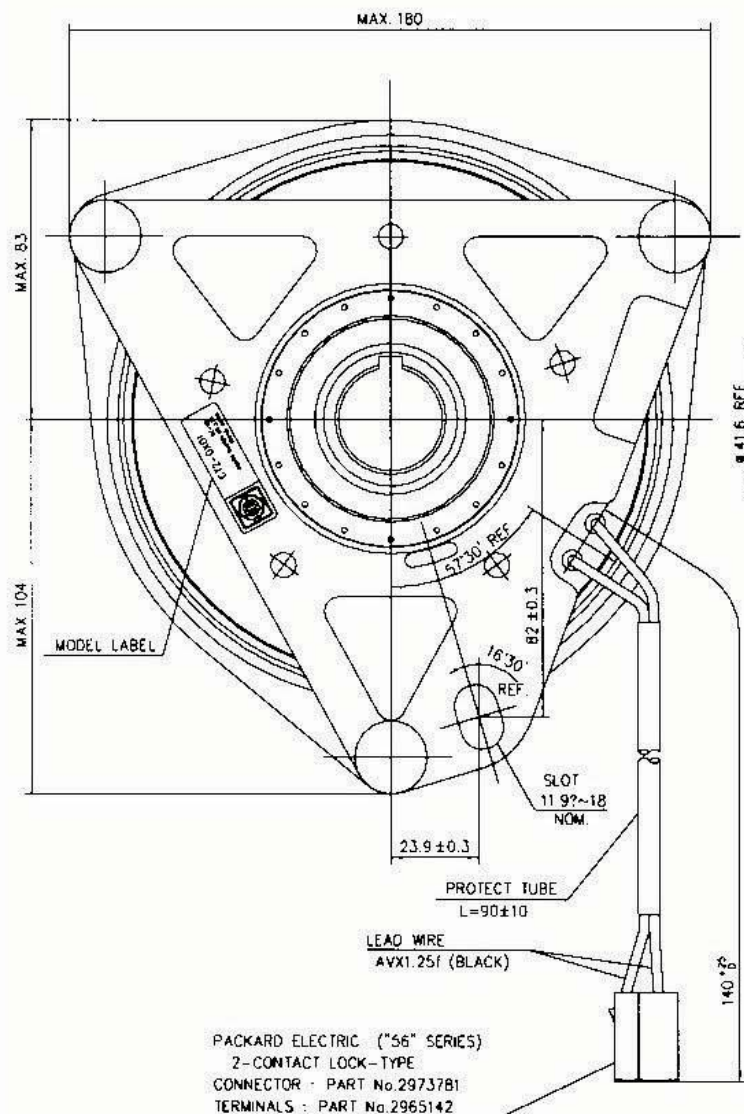


SPECIFICATIONS

EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 50 W
STATIC CLUTCH TORQUE	
INITIAL MIN. 59 N°Em	
AFTER BURNISHING MIN. 149 N°Em	
STATIC BRAKE TORQUE	
INITIAL MIN. 1.5 N°Em	
AFTER BURNISHING MIN. 3 N°Em	
MIN PULL IN VOLTAGE	D.C. 8 V
	(COPPER COIL)

REV	REVISION STATUS	NOTE	DATE	CHK BY	BY
△					
△					
△					

ROTATION
ROTOR INPUT.

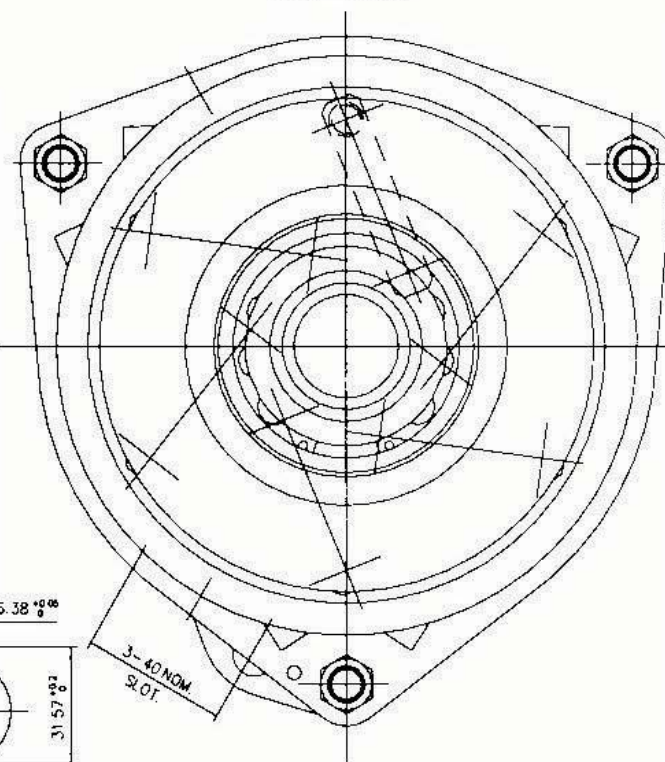

NOTES

- Airgaps must be adjusted when coilsprings and airgap adjustment nuts are incorporated into the clutch/brake at the assembly

CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIC.

SURFACE TOUGHNESS UNLESS OTHERWISE SPECIFIED		GENERAL TOLERANCE PER CLASS 1		WORKING PROCESS		APPROVED BY		DATE		SIZE A2	
RANGE		TOL.		MATERIAL		CHECKED BY		DATE		SCALE 1/1	
0	505	0.3	0.1			DESIGNED BY		DATE			
100	255	0.3	0.2	MATERIAL CODE		DRAWN BY		DATE		1st 08.08.2008	
200	125	0.3	0.3	MATERIAL SIZE		CUSTOMER		DIXON			
300	35	0.3	0.4	MATERIAL SIZE		MODEL		GT2-DX01			
400	0.85	0.3	0.5	HEAT TREAT		ASSY NO					
HISTORY				SURFACE TREAT		NAME		MAGNETIC CLUTCH & BRAKE			
ISSUE NO 52386800				PLANT 2		PARTS CODE		5913100000			
ISSUE DATE				OGURA CLUTCH Co.,LTD		CNC NO		52386800			