

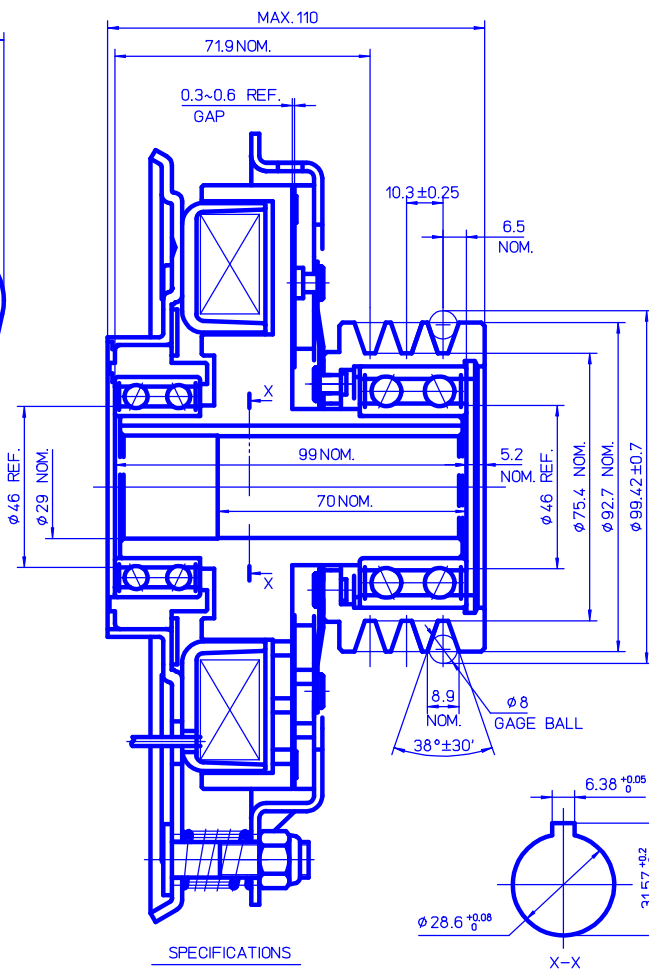


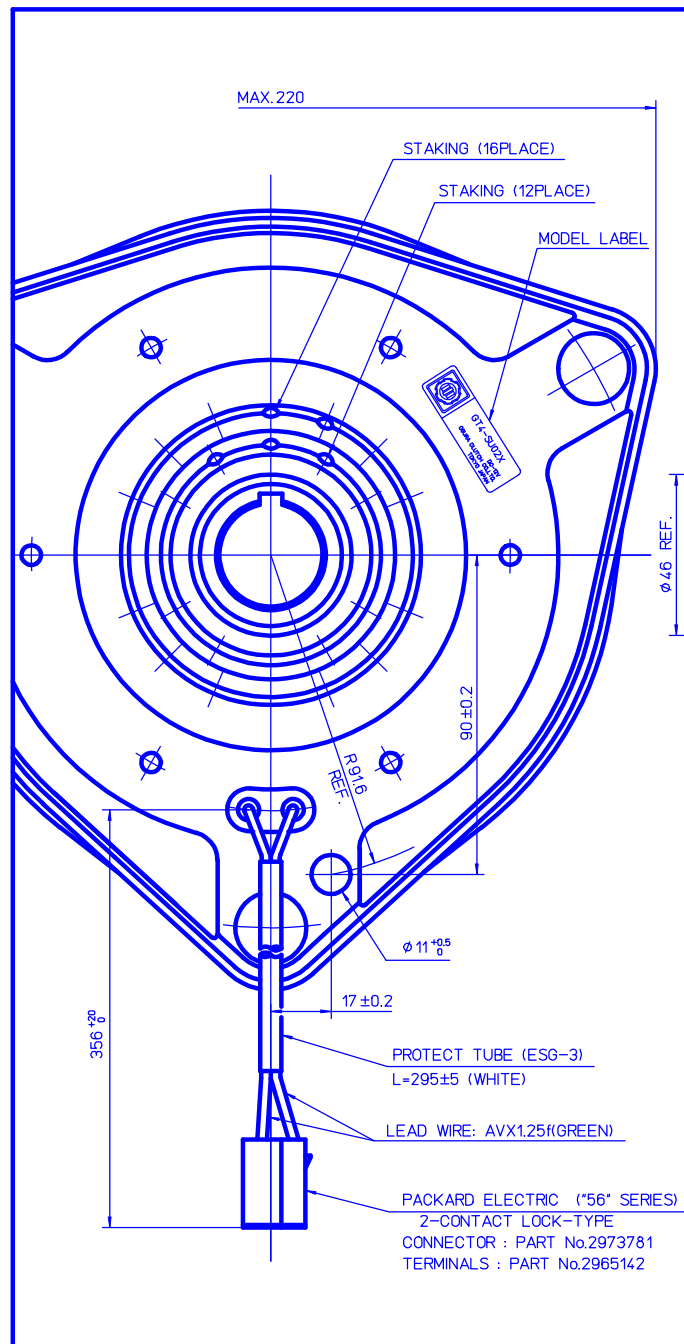

SPECIFICATIONS

EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 68 W
STATIC CLUTCH TORQUE	
INITIAL	MIN. 98 N·m
AFTER BURNISHING	MIN. 271 N·m
STATIC BRAKE TORQUE	
INITIAL	MIN. 2 N·m
AFTER BURNISHING	MIN. 10 N·m
MIN PULL IN VOLTAGE	D.C. 8.5 V
	(COPPER COIL)

REV	REVISION STATUS	NOTE	DATE	CHK BY
1				

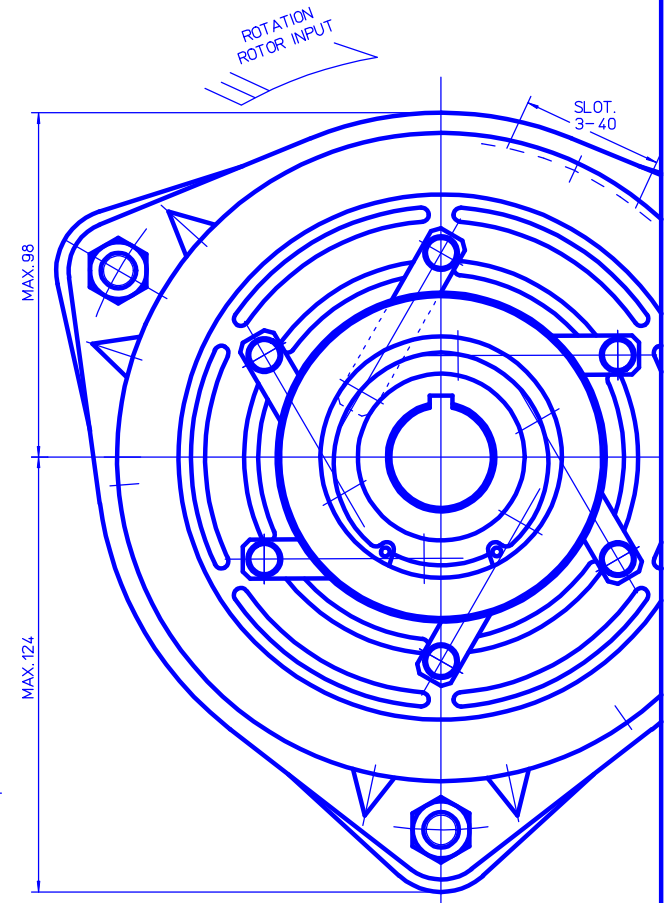

NOTES

- Airgaps must be adjusted when coilsprings and airgap adjustment nuts are incorporated into the clutch/brake at the assembly.
- Phosphate coating (Armature plate)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS	WORKING PROCESS	APPROVED BY	DATE	SIZE
	RANGE	TOL.	CHECKED BY	DATE	SCALE
	DESIGNED BY	DATE	DRAWN BY	DATE	1
	CUSTOMER	DATE	MODEL	GT4-SU02X	
ISSUE NO	PLANT	PARTS CODE	NAME	MAGNETIC CLUTCH & BRAKE	
ISSUE DATE		5913100000	DWG NO	52536200	0