



THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI

REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY
△					
△					
△					

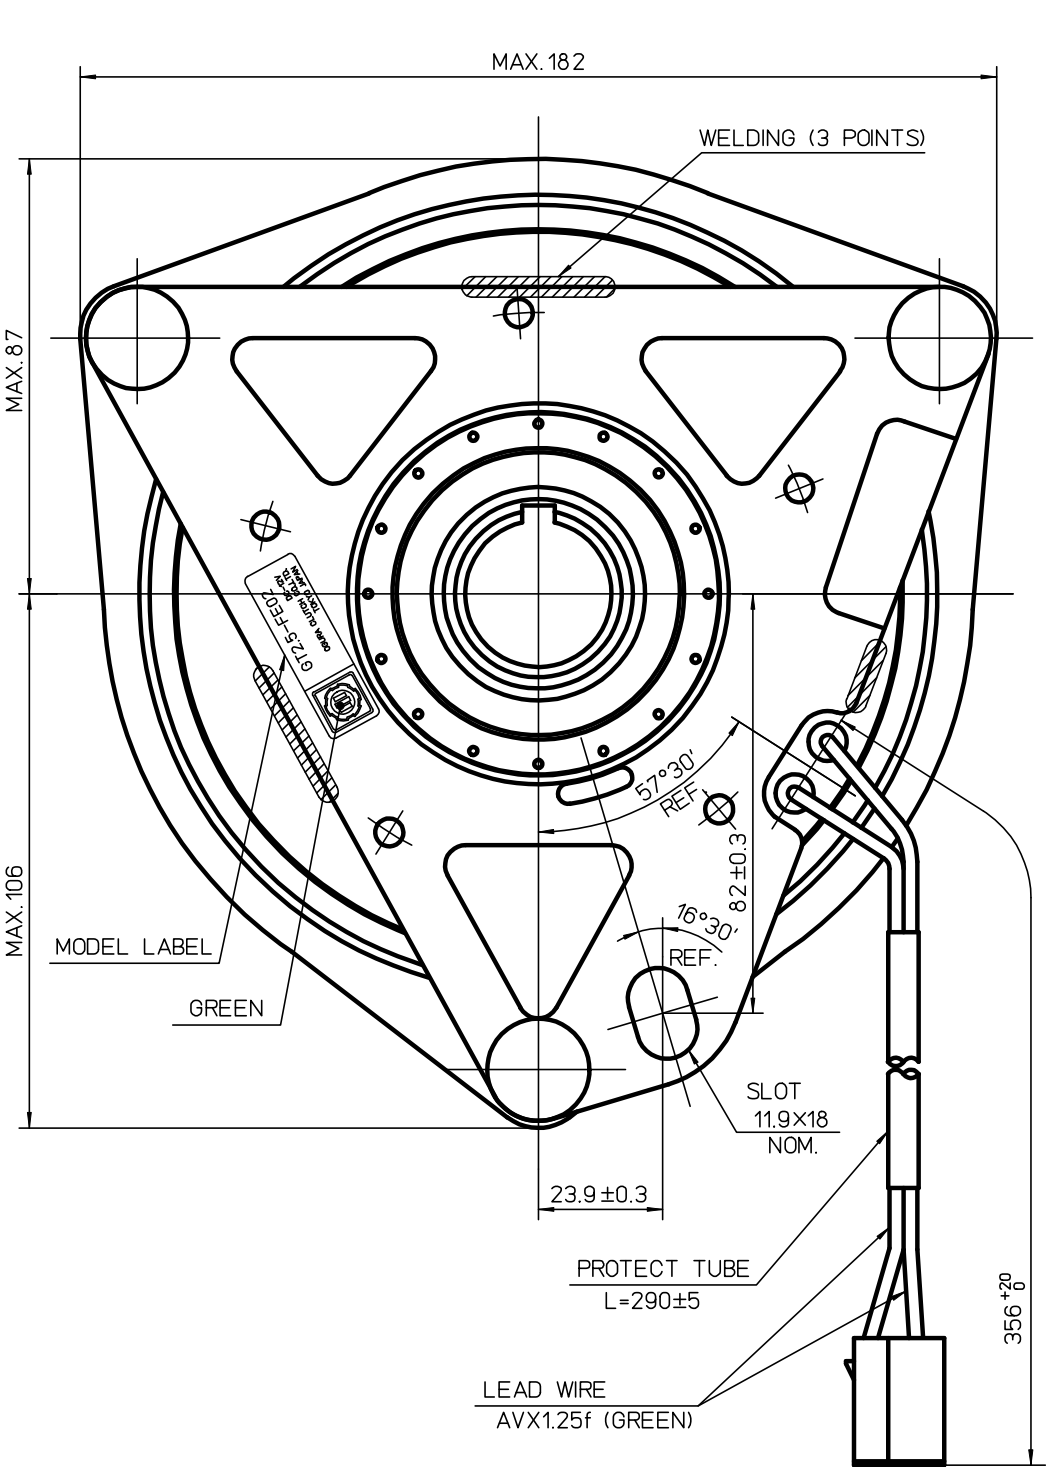


PACKARD ELECTRIC ("56" SERIES)
2-CONTACT LOCK-TYPE
CONNECTOR : PART No.2973781
TERMINALS : PART No.2965142

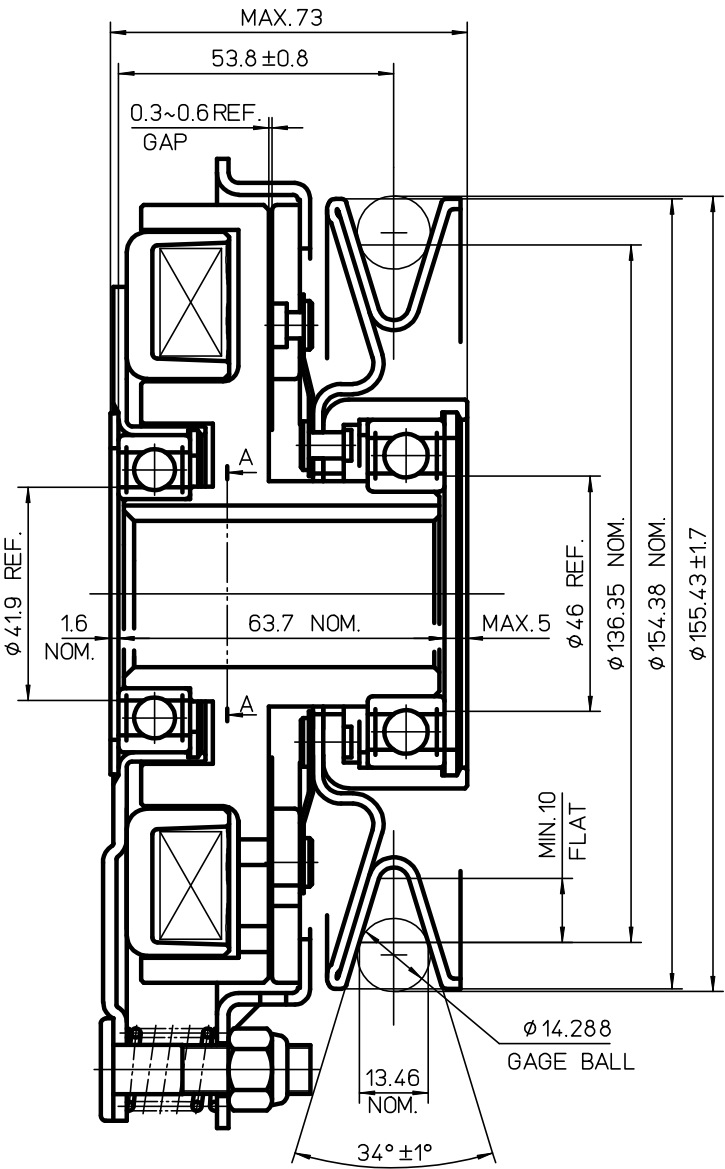

SPECIFICATIONS

EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 60 W
STATIC CLUTCH TORQUE	
INITIAL	MIN. 59 N·m
FINAL	NOMINAL. 203 N·m
STATIC BRAKE TORQUE	
INITIAL	MIN. 1.5 N·m
FINAL	NOMINAL. 3 N·m
MIN PULL IN VOLTAGE	D.C. 8 V
(COPPER COIL)	

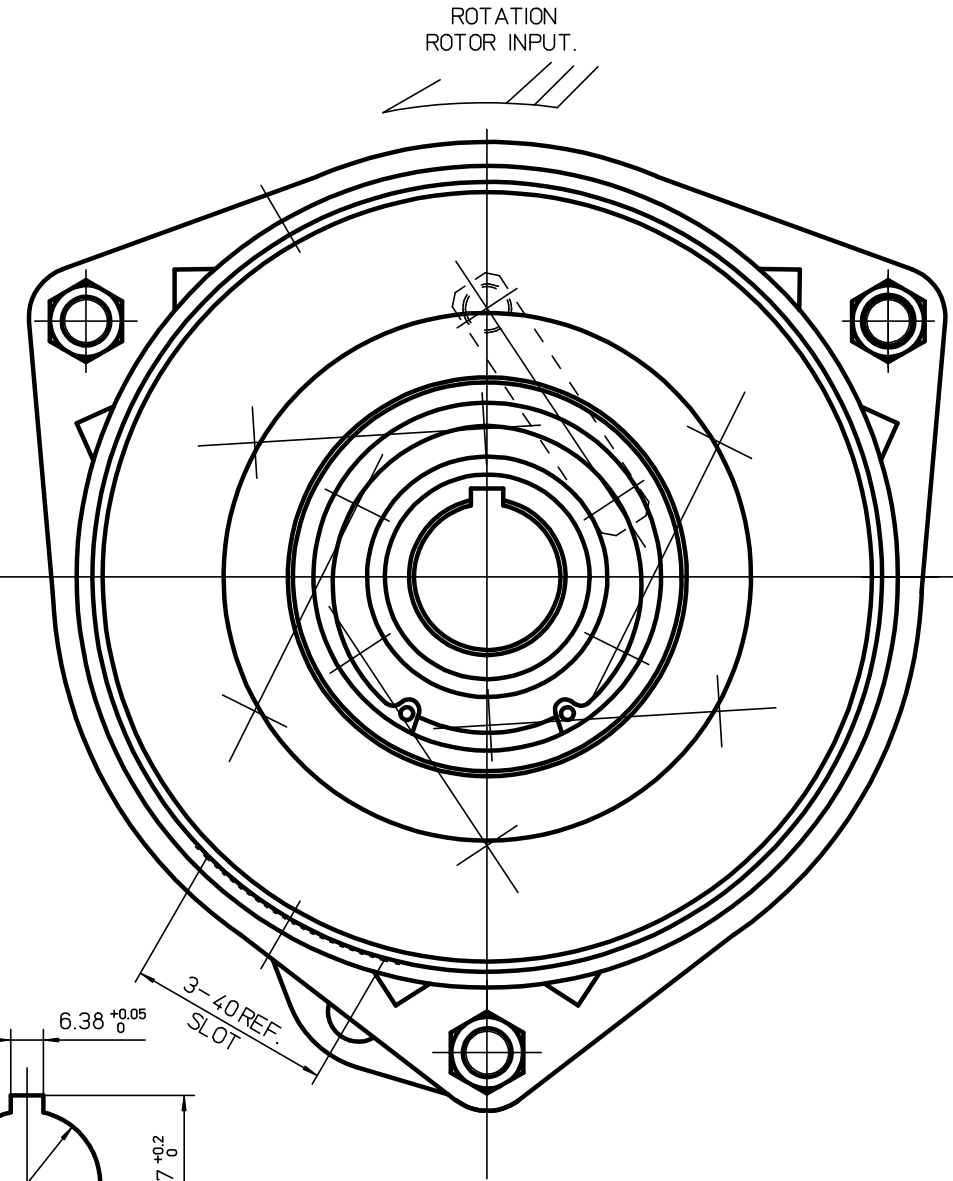

NOTES

- Airgaps must be adjusted when coilsprings and airgap adjustment nuts are incorporated into the clutch/brake at the assembly.
- Phosphate coating (Armature plate)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS		APPROVED BY <u>E. Maejima</u>	DATE <u>Apr.16.2003</u>	SIZE A2 SCALE 1 / 1	
	RANGE		TOL.	CHECKED BY <u>K. Sugiyama</u>	DATE <u>Apr.15.2003</u>	CUSTOMER FERRIS		
	OVER 0.5 TO 6		± 0.1	DESIGNED BY <u>N. Sugiki</u>	DATE <u>Apr.15.2003</u>			MODEL GT2.5-FE02
	▽ 50S		± 0.2	DRAWN BY <u>S. Shimura</u>	DATE <u>Apr.03.2003</u>			
▽▽	25S	6	30	± 0.2	MATERIAL CODE	CUSTOMER		
▽▽▽	6S	30	120	± 0.3	MATERIAL SIZE	MODEL		
▽▽▽	3S	120	315	± 0.5	HEAT TRTMT	GT2.5-FE02		
▽▽▽▽	0.8S	315	1000	± 0.8	SURFACE TRTMT	NAME		
HISTORY		52610200		00	MAGNETIC CLUTCH & BRAKE			
ISSUE NO	PLANT	2		PARTS CODE	5913100000			
ISSUE DATE		OGURA CLUTCH Co.,LTD.			DWG NO		52610200	
							00	