

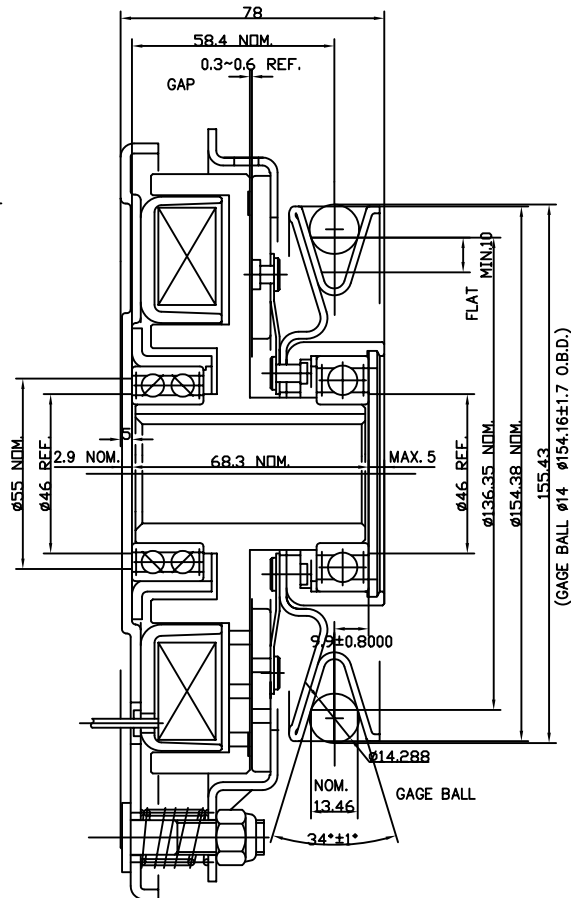
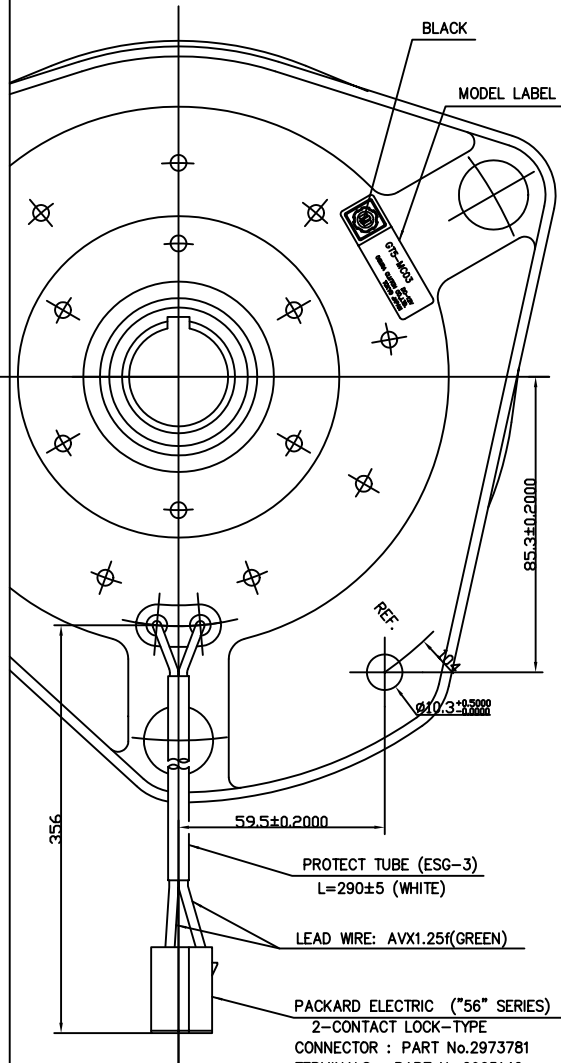


THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

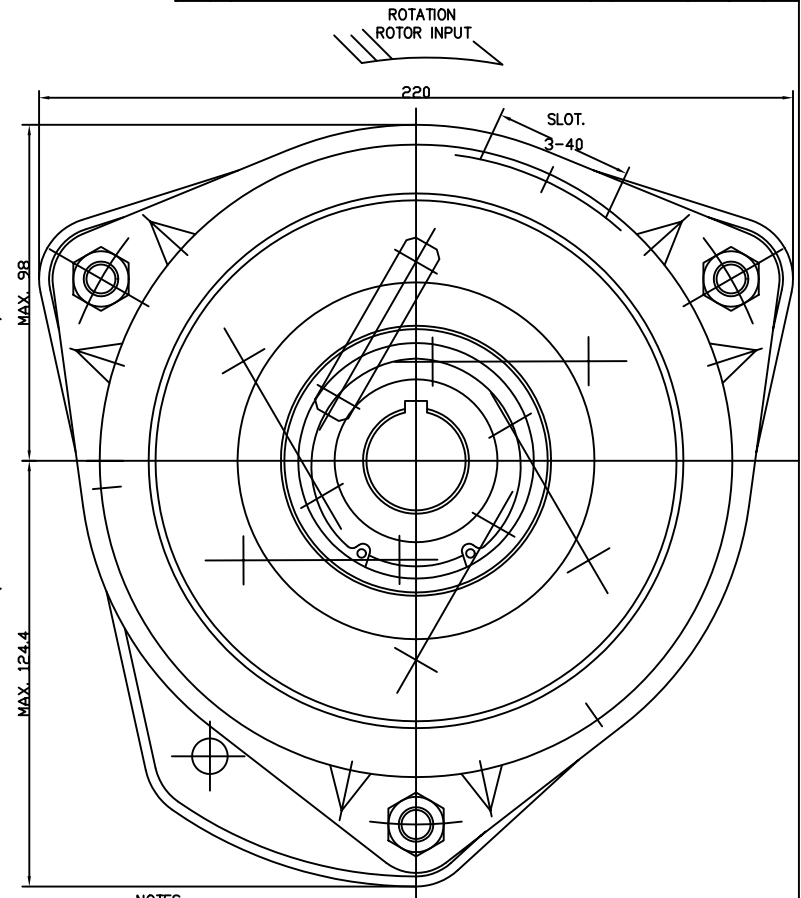

SPECIFICATIONS

EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 68 W
STATIC CLUTCH TORQUE	
INITIAL MIN. 110 Nm	
FINAL NOMINAL 475 Nm	
STATIC BRAKE TORQUE	
INITIAL MIN. 2 Nm	
FINAL NOMINAL 6 Nm	
MIN PULL IN VOLTAGE	D.C. 8 V
	(COPPER COIL)



NOTES

- Airgaps must be adjusted when coilsprings and airgap adjustment nuts are incorporated into the clutch/brake at the assembly.
- Phosphate coating (Armature plate)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 1 ¹	WORKING PROCESS	APPROVED BY	DATE	SIZE
			CHECKED BY	DATE	SCALE
▽ 50S	RANGE 0.5 0.1	MATERIAL	DESIGNED BY	DATE	1/1
▽ 25S	6 30 ± 0.2	MATERIAL	DRAWN BY	DATE	1/1
▽ 12S	30 120 ± 0.3	MATERIAL	CUSTOMER		
▽ 6S	120 315 ± 0.5	SIZE	MODEL		
▽ 3S	315 1000 ± 0.8	HEAT TREAT	GT5-MC03		
HISTORY	52623200	SURFACE TREAT	ASSY NO		
ISSUE NO	PLANT 2	PARTS CODE	NAME		
ISSUE DATE		5913100000	MAGNETIC CLUTCH & BRAKE		
		OGURA CLUTCH Co.,LTD.	DWG NO		
			52623200		