



REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY
△					
△					
△					

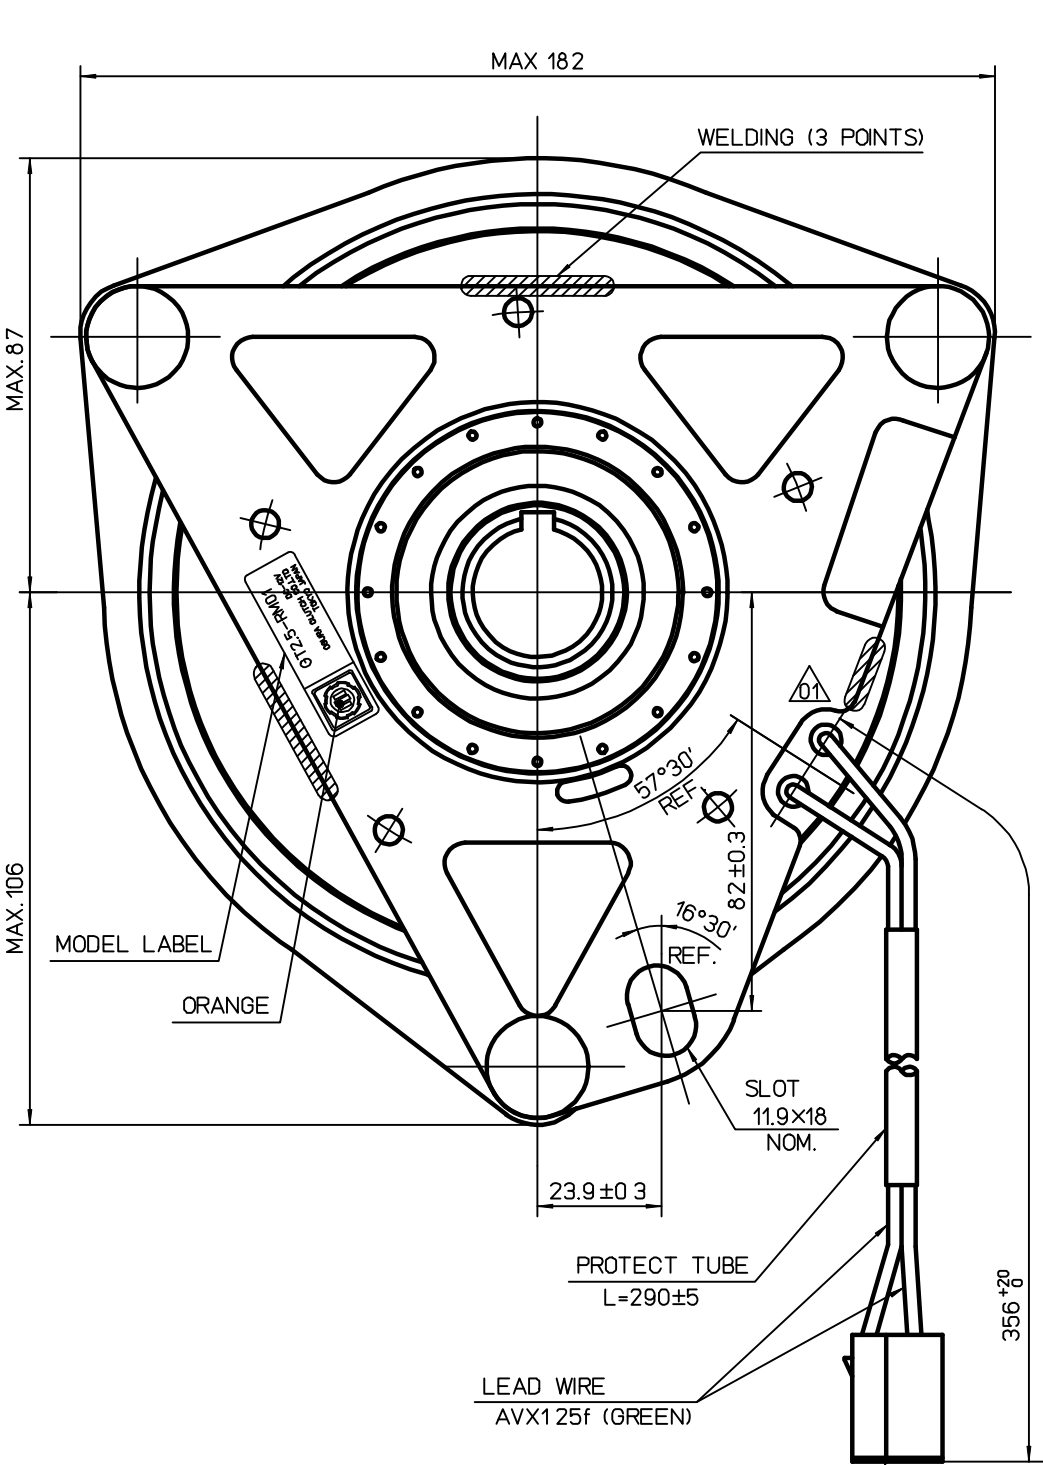


PACKARD ELECTRIC ("56" SERIES)
2-CONTACT LOCK-TYPE
CONNECTOR : PART No.2973781
TERMINALS : PART No.2965142

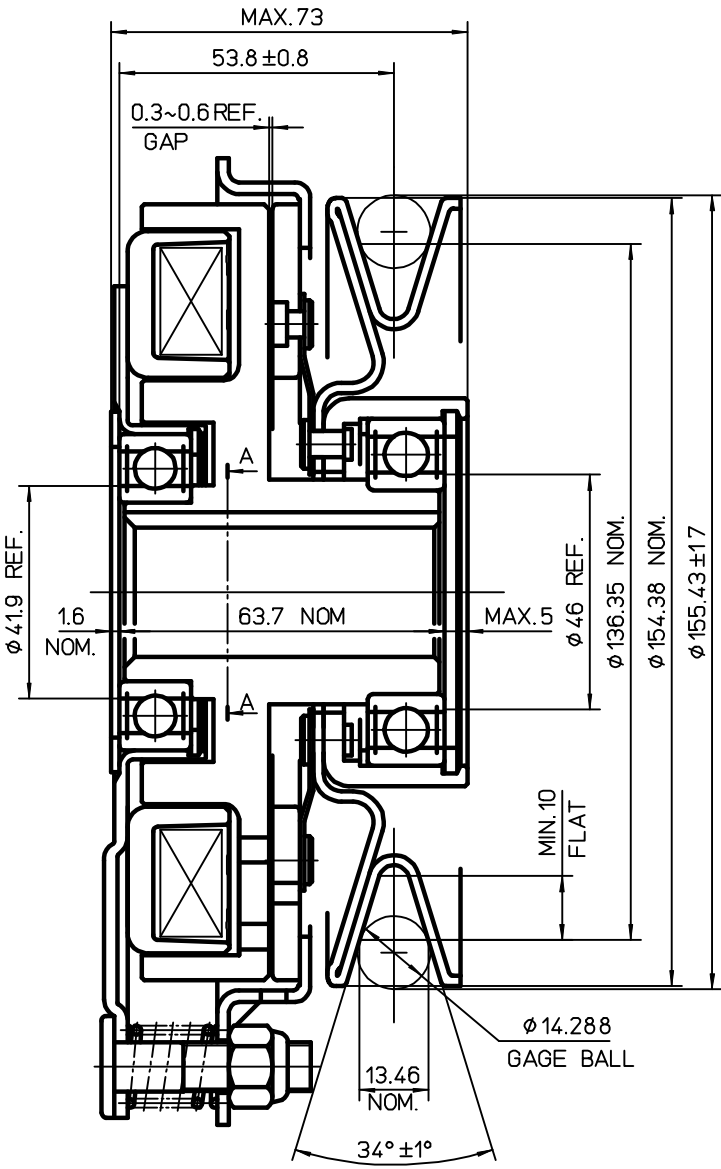

SPECIFICATIONS

EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 60 W
STATIC CLUTCH TORQUE	
INITIAL	MIN. 59 N·m
FINAL	NOMINAL. 203 N·m
STATIC BRAKE TORQUE	
INITIAL	MIN. 1.5 N·m
FINAL	NOMINAL. 3 N·m
MIN PULL IN VOLTAGE	D C 8 V
	(COPPER COIL)

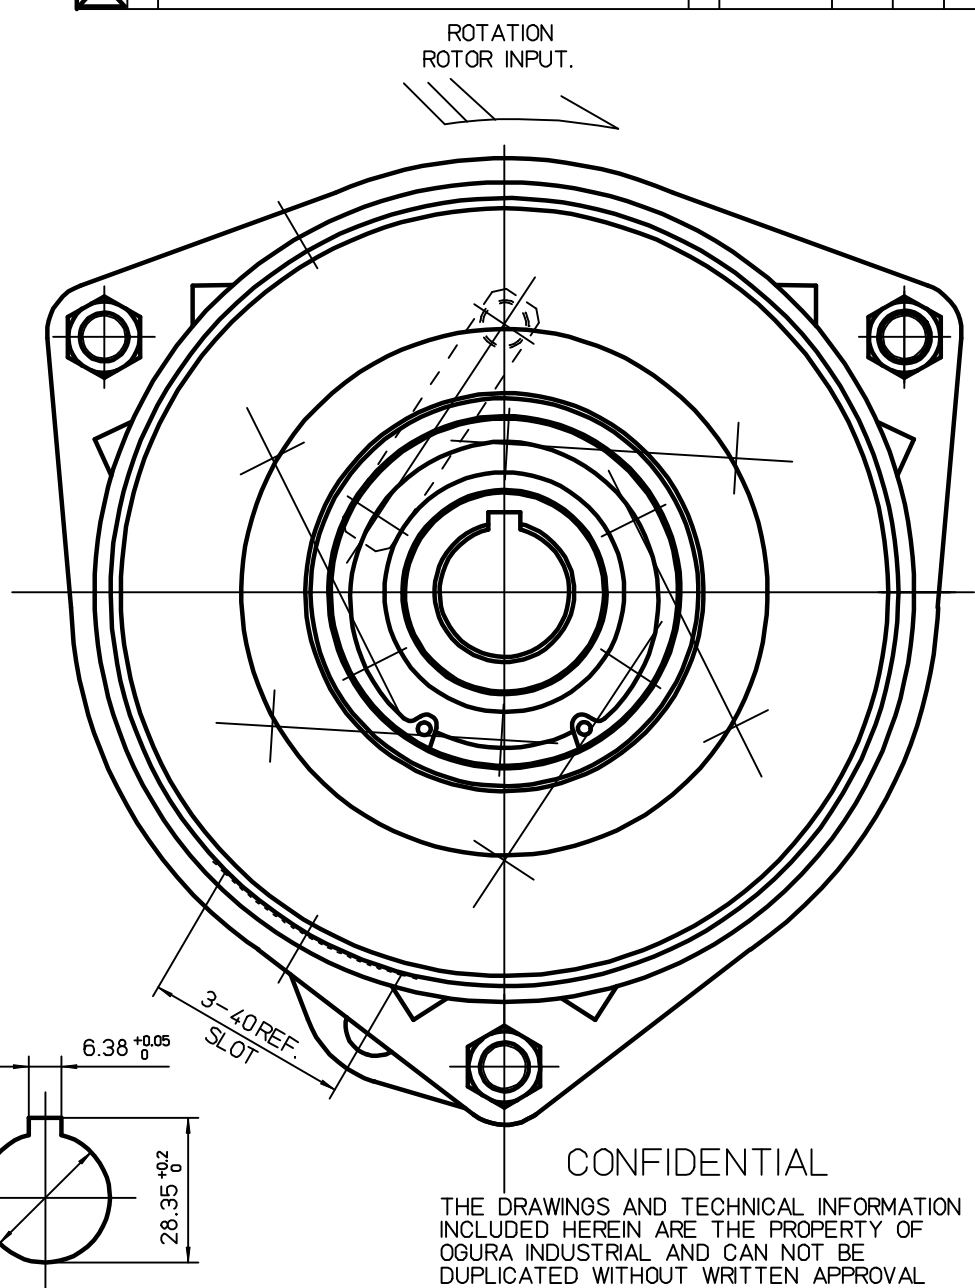

NOTES

- Airgaps must be adjusted when coilsprings and airgap adjustment nuts are incorporated into the clutch/brake at the assembly.
- Phosphate coating (Armature plate)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY	DATE	SIZE
			CHECKED BY	DATE	A2
			DESIGNED BY	DATE	SCALE
			DRAWN BY	DATE	1/1
▽ 50S	OVER 0.5 TO 6 ± 0.1	MATERIAL	CUSTOMER	EX	
▽ 25S	6 30 ± 0.2	MATERIAL CODE	MODEL	GT2.5-RM01	
▽ 6S	30 120 ± 0.3	MATERIAL SIZE	ASSY NO		
▽ 3S	120 315 ± 0.5	HEAT TRTMT	NAME	MAGNETIC CLUTCH & BRAKE	
▽ 0.8S	315 1000 ± 0.8	SURFACE TRTMT	DWG NO	52623800	
HISTORY	52623800	ISSUE NO	PLANT	2	
ISSUE DATE		PARTS CODE		5913100000	
		OGURA CLUTCH Co.,LTD.		52623800	