



REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
△					
△					
△					

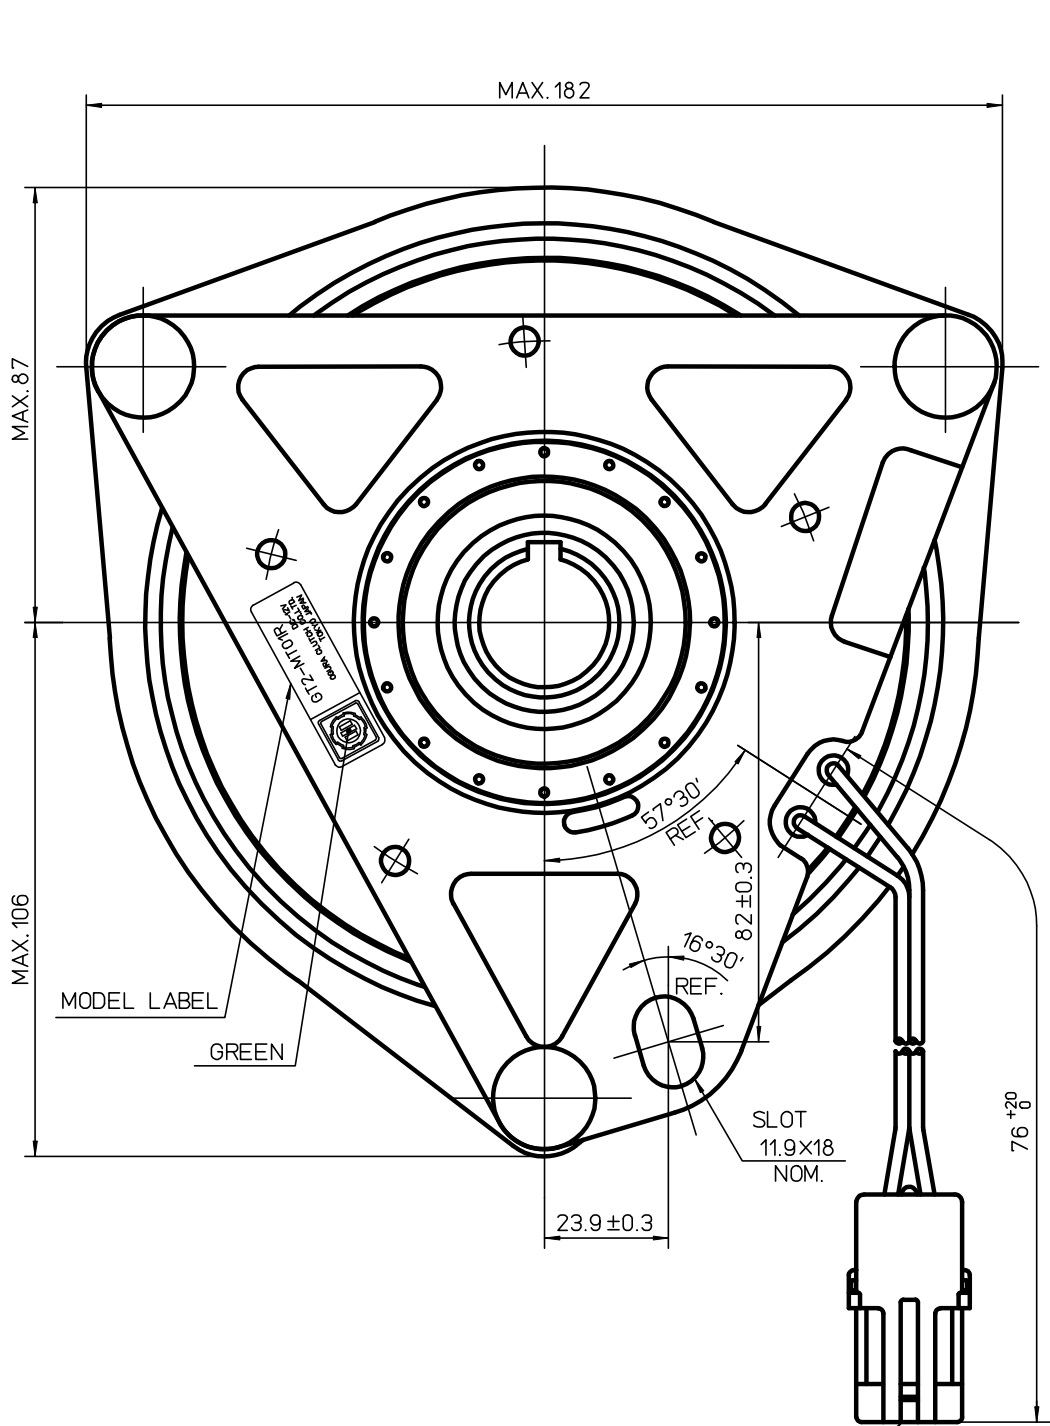


PACKARD WEATHER PACK CONNECTOR
Connector and Connector Seal Assembly.....12010973
Terminals.....12124582
Cable Seals.....12015284

REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

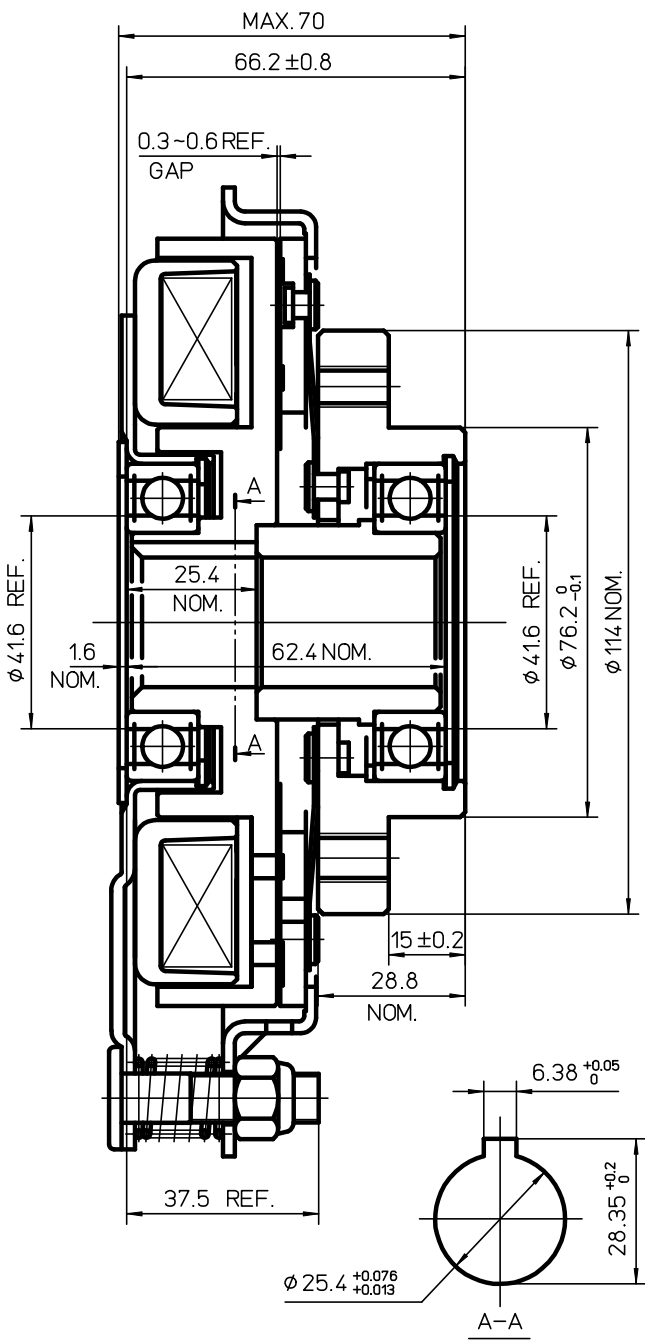

SPECIFICATIONS	
EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 50 W
STATIC CLUTCH TORQUE	
INITIAL	MIN. 59 N·m
FINAL	NOMINAL. 149 N·m
STATIC BRAKE TORQUE	
INITIAL	MIN. 1.5 N·m
FINAL	NOMINAL. 3 N·m
MIN PULL IN VOLTAGE	D.C. 8 V
	(COPPER COIL)

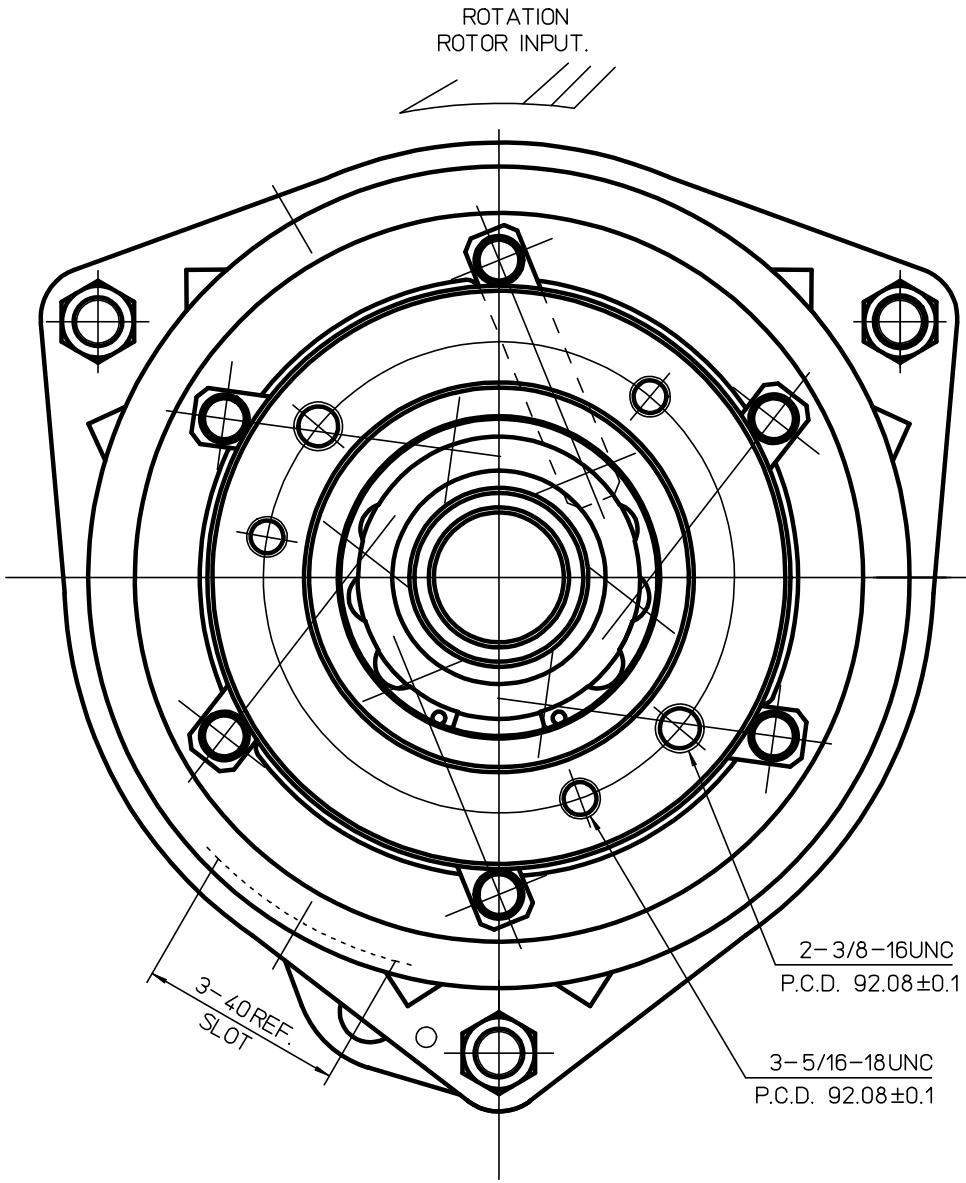

- NOTES
- Airgaps must be adjusted when coilsprings and airgap adjustment nuts are incorporated into the clutch/brake at the assembly.

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS	APPROVED BY	E. Maejima	DATE	Jun.16.2003	SIZE A2
				CHECKED BY	K. Busujima	DATE	Jun.16.2003	
				DESIGNED BY	N. Suzuki	DATE	Jun.16.2003	
				DRAWN BY	s.shimura	DATE	Jun.12.2003	
				CUSTOMER				
▽ 50S OVER 0.5 10 6 ± 0.1			MATERIAL	MODEL				
▽▽ 25S 6 30 ± 0.2			MATERIAL CODE	GT2-MT01R				
▽▽▽ 6S 30 120 ± 0.3			MATERIAL SIZE	ASSY NO				
▽▽▽▽ 3S 120 315 ± 0.5			HEAT TRTMT 0	NAME				
▽▽▽▽▽ 0.8S 315 1000 ± 0.8			SURFACE TRTMT 0	DWG NO				
HISTORY 52630400 00			MAGNETIC CLUTCH & BRAKE					
ISSUE NO		PLANT 2	PARTS CODE 5913100000	OGURA CLUTCH Co.,LTD.				
ISSUE DATE					52630400 00			