

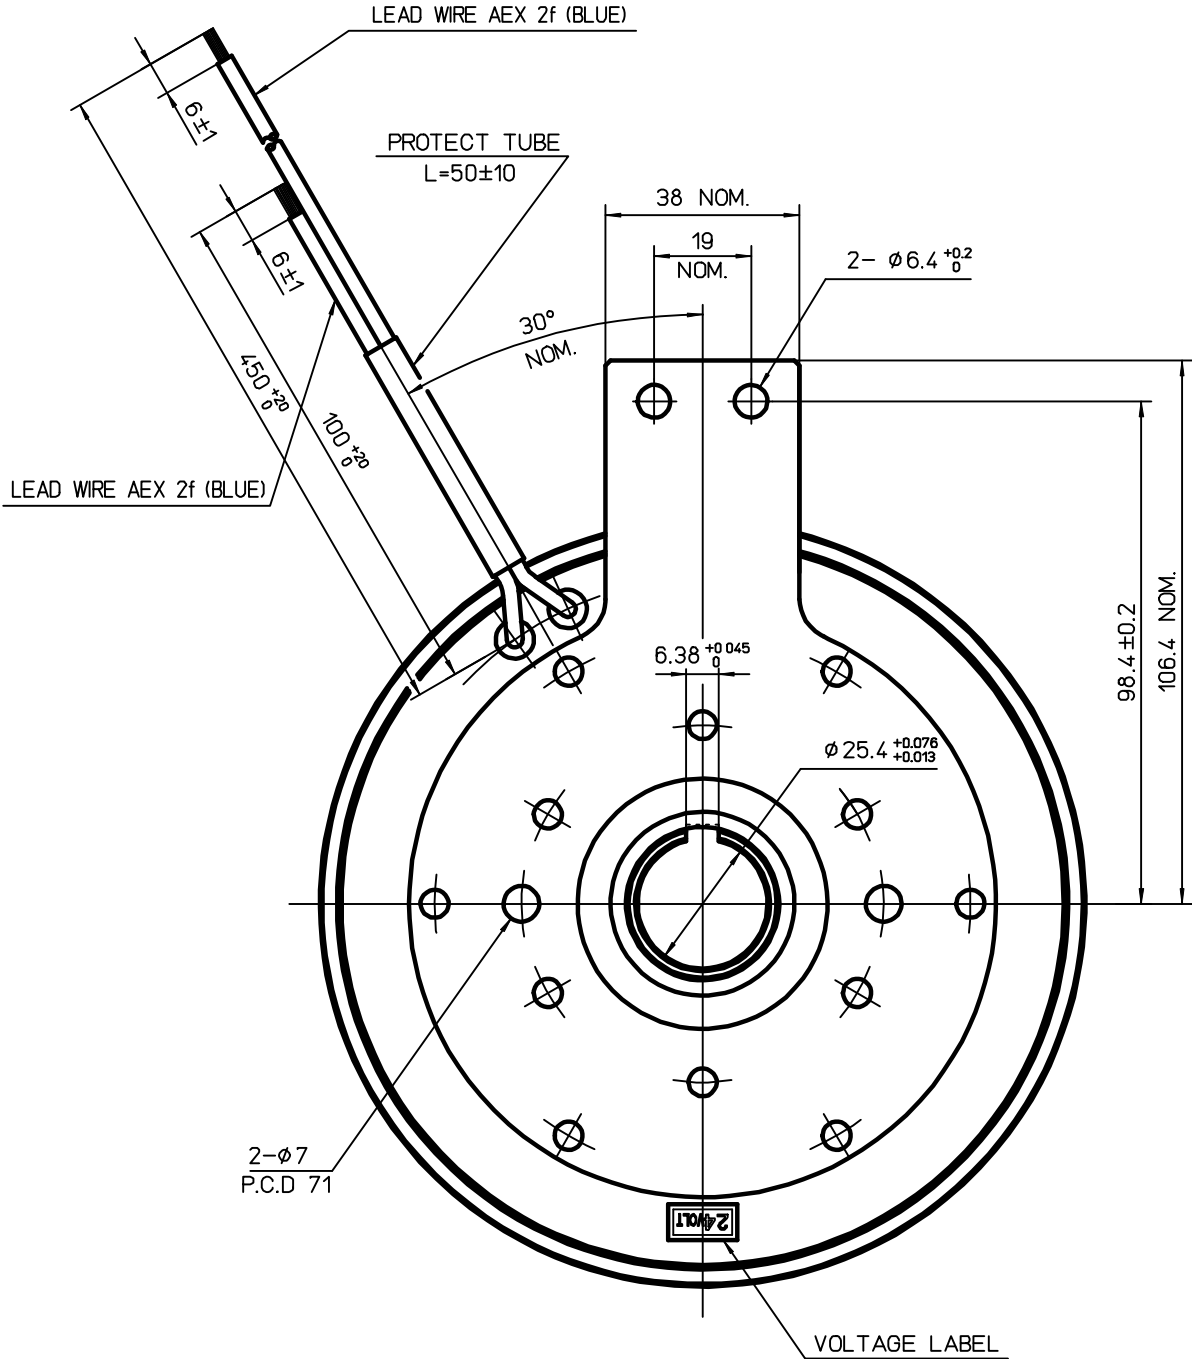


REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY
△					
△					
△					

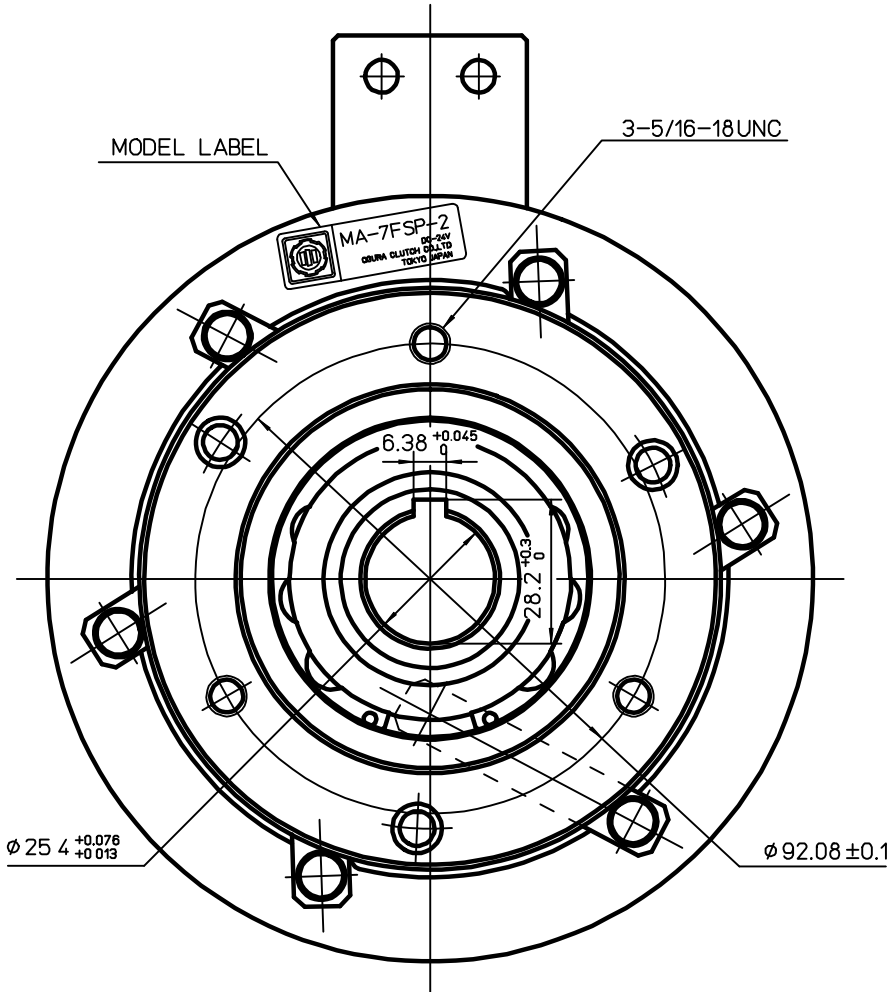

REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

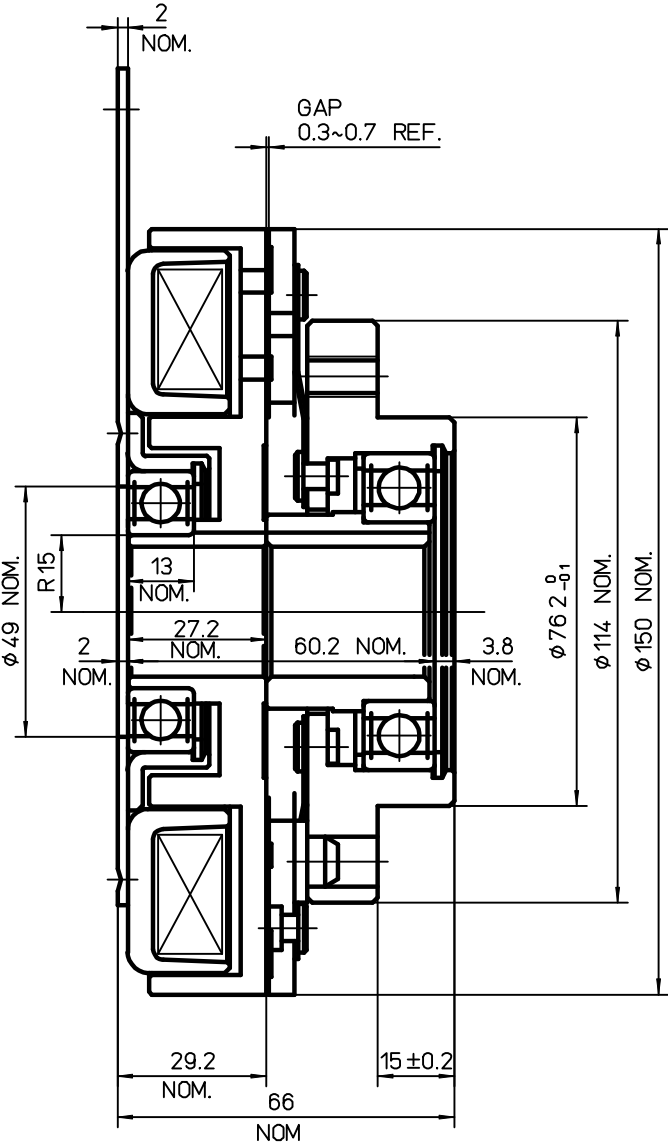

SPECIFICATIONS(at 20°C)

EXCITING VOLTAGE	D.C 24 V
POWER CONSUMPTION	MAX. 52 W
STATIC CLUTCH TORQUE	
INITIAL	MIN. 49 N·m
FINAL	NOMINAL. 149 N·m
MIN PULL IN VOLTAGE	D.C. 16 V

NOTES

SURFACE TREATMENT BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
FRICTION SURFACE
RIVET (MFZn2-B)
HUB INNER DIA
FIELD CORE COIL ASSY (MFZn3)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY <i>E. Maejima</i>	DATE Dec.16.2003	SIZE A2
RANGE	TOL.	MATERIAL	CHECKED BY <i>K. Busujima</i>	DATE Dec.16.2003	SCALE 1/1
▽ 50S OVER 0.5 TO 6 ± 0.1			DESIGNED BY <i>N. Suguchi</i>	DATE Dec.16.2003	
▽ 25S 6 30 ± 0.2			DRAWN BY <i>s.shimura</i>	DATE Dec.16.2003	
▽ 6S 30 120 ± 0.3			CUSTOMER EX		
▽ 3S 120 315 ± 0.5			MODEL MA-7FSP-2		
▽ 0.8S 315 1000 ± 0.8			ASSY NO		
HISTORY 52676600			NAME MAGNETIC CLUTCH		
ISSUE NO	PLANT 2	PARTS CODE 5913200000	DWG NO		
ISSUE DATE		OGURA CLUTCH Co.,LTD.	52676600		0