
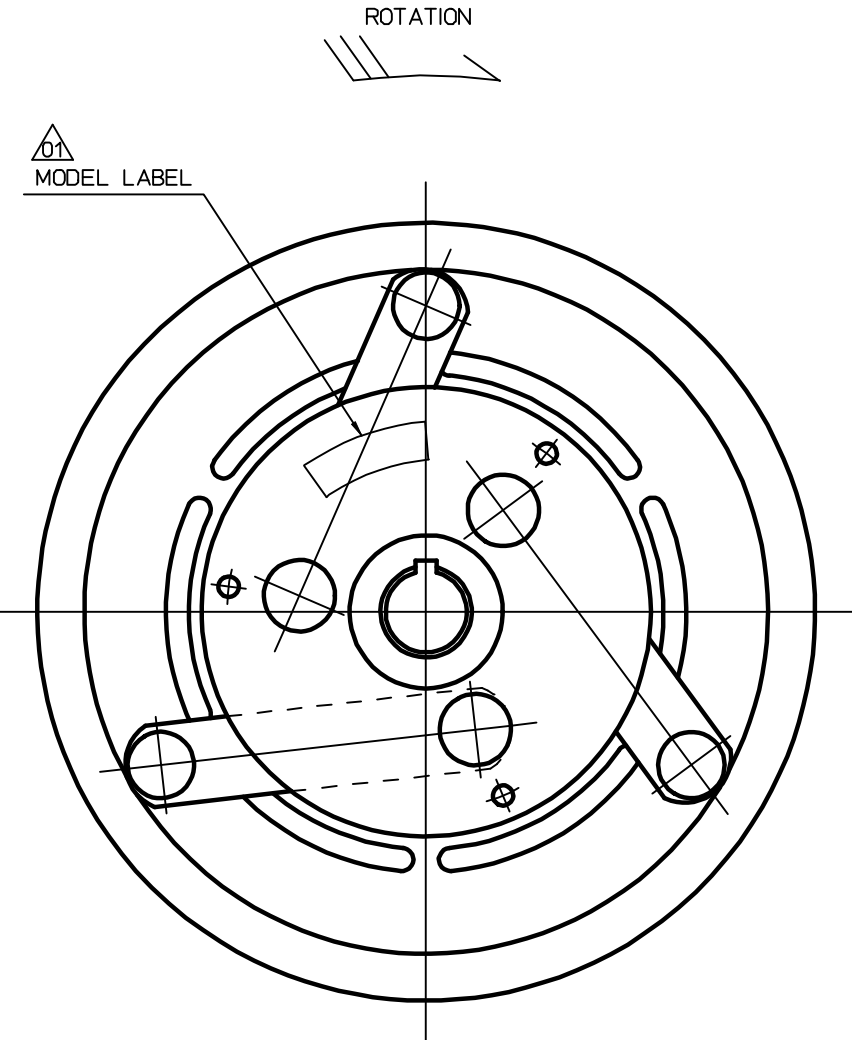


REV	REVISION STATUS		NOTE	DATE	CHG BY	CHK BY
1	Change model label.	(1)	2	Next assemble	Mar.31.05	S.S. K.B.

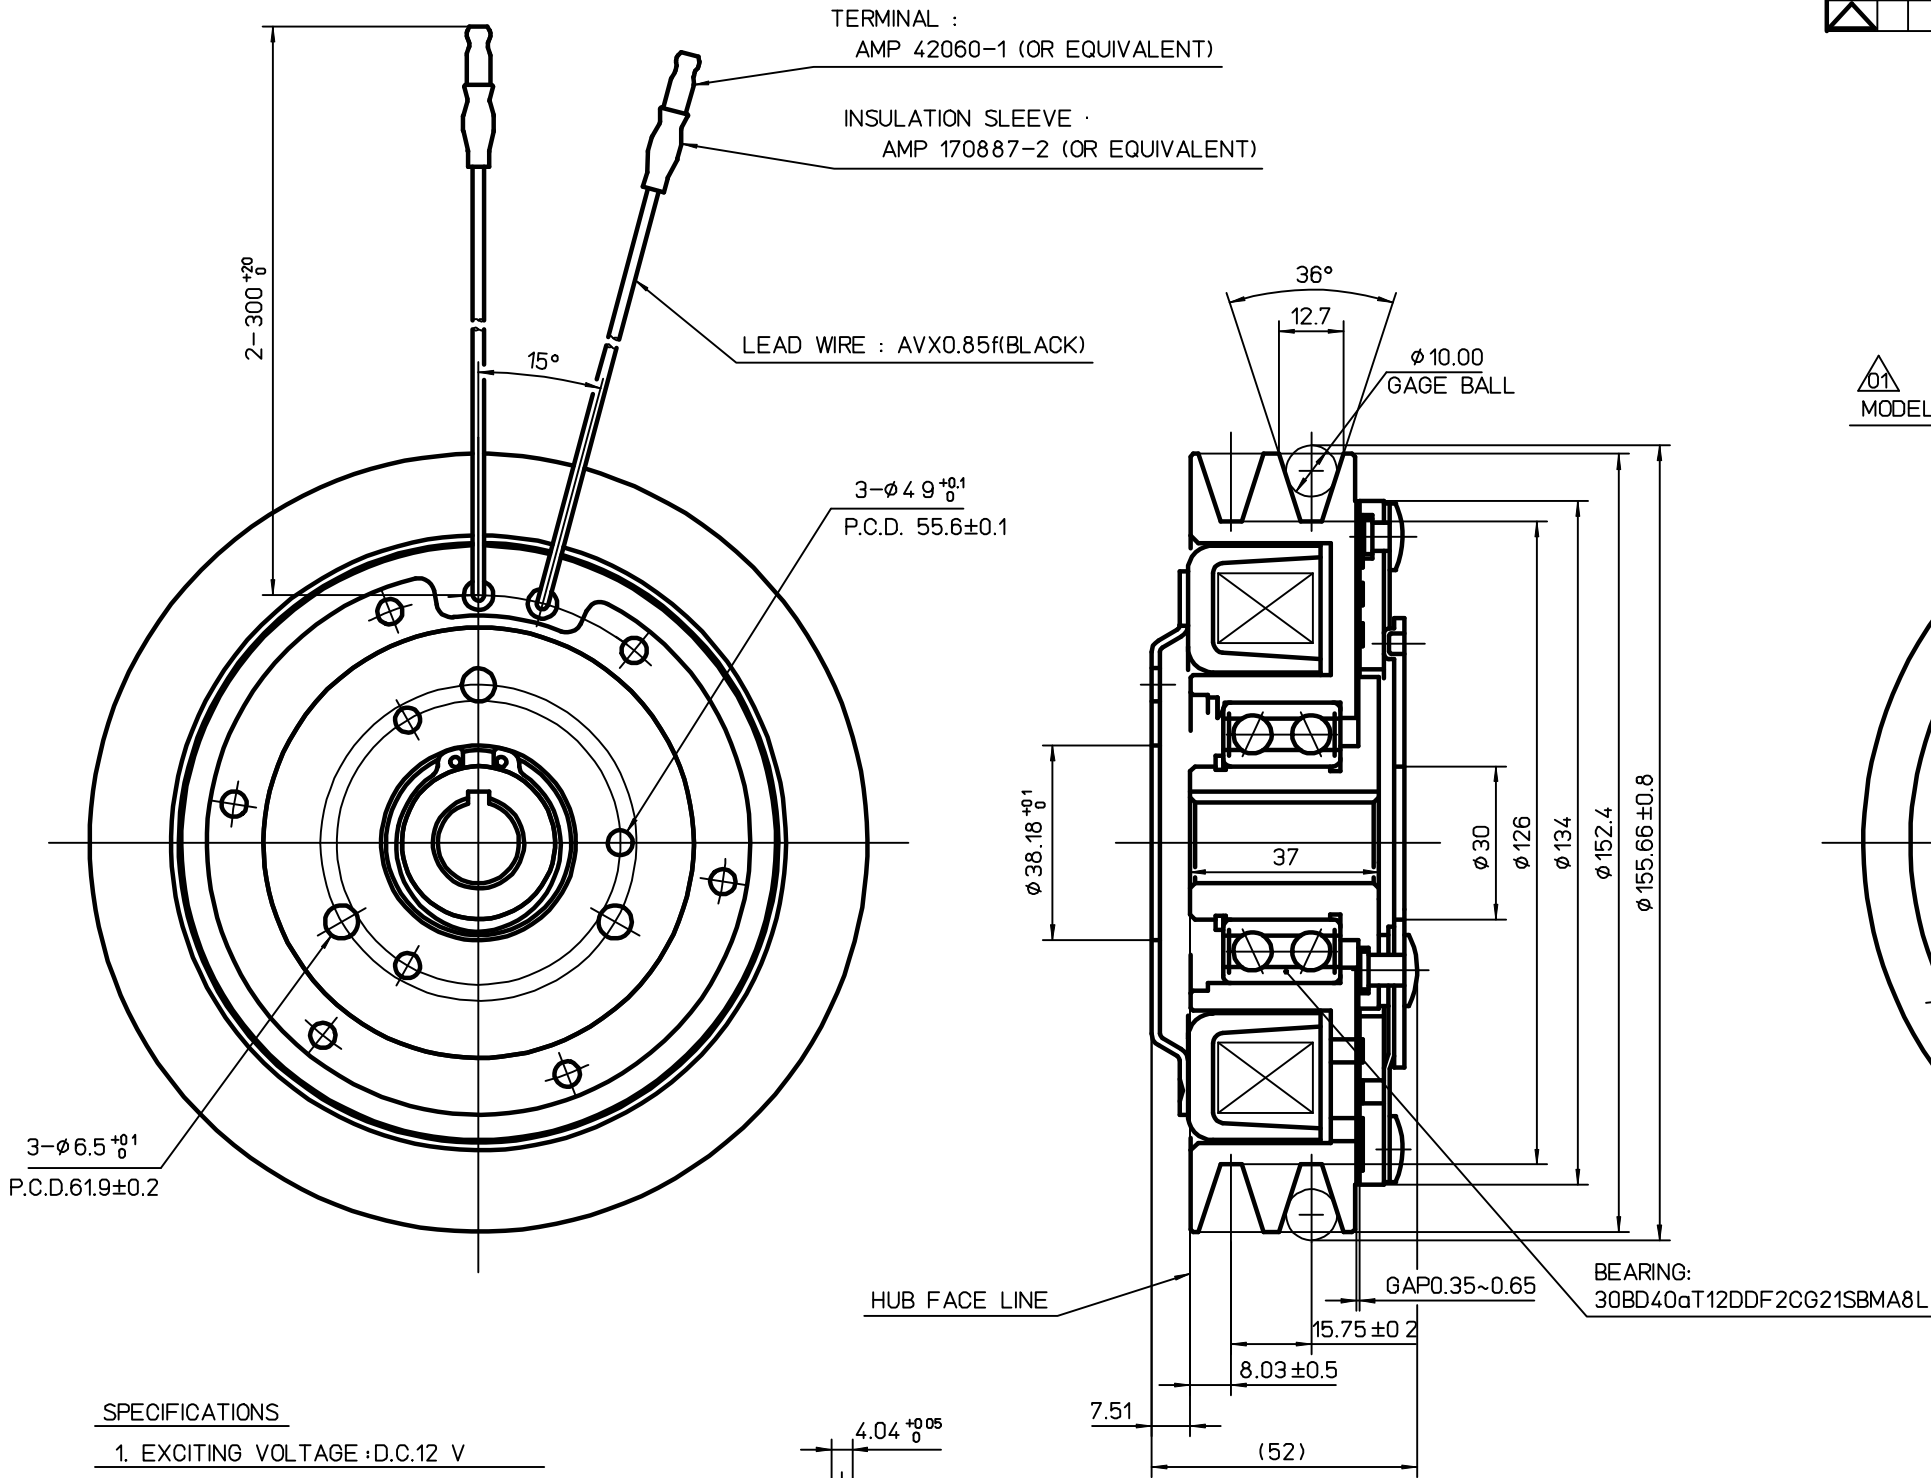


REFERENCE ONLY

CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

SPECIFICATIONS

1. EXCITING VOLTAGE :D.C.12 V
2. STATIC TORQUE
INITIAL :39 N・m
AFTER BURNISHING :108 N・m
- 3 POWER CONSUMPTION :MAX 47 W
4. ROTATION :C.W.
(COPPER COIL)



BORE SIZE

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS		APPROVED BY <u>E. Maejima</u>	DATE <u>Jun.21.2004</u>	SIZE A2
	RANGE	TOL.	MATERIAL		CHECKED BY <u>K. Buejima</u>	DATE <u>Jun.21.2004</u>	SCALE 1
∇ 5.0S	OVER 0.5 TO 6	± 0.1	MATERIAL		DESIGNED BY <u>P. Sugahara</u>	DATE <u>Jun.18.2004</u>	1
∇ 2.5S	6	30 ± 0.2	MATERIAL		DRAWN BY <u>s.shimura</u>	DATE <u>Jun.08.2004</u>	
∇ 1.25S	30	120 ± 0.3	MATERIAL		CUSTOMER EX		
∇ 0.8S	120	315 ± 0.5	MATERIAL		MODEL MA-6A-MUNX		
∇ 0.4S	315	1000 ± 0.8	HEAT TRTMT		ASSY NO		
HISTORY 52726300			SURFACE TRTMT		NAME MAGNETIC CLUTCH		
ISSUE NO		PLANT 2	PARTS CODE 5913100000		DWG NO 52726300		
ISSUE DATE			OGURA CLUTCH Co.,LTD.				