


CONFIDENTIAL

REV	REVISION STATUS			NOTE	DATE	CHG BY	CHK BY	
	1	Change surface treatment. Change form. Add notes. etc.	(8)	2	Next assemble	Apr.03.08	S.S	N.S.
	5	Change leaf spring.	(1)	2	Next assemble	Dec.16.10	N.S	Y.T.
								

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.

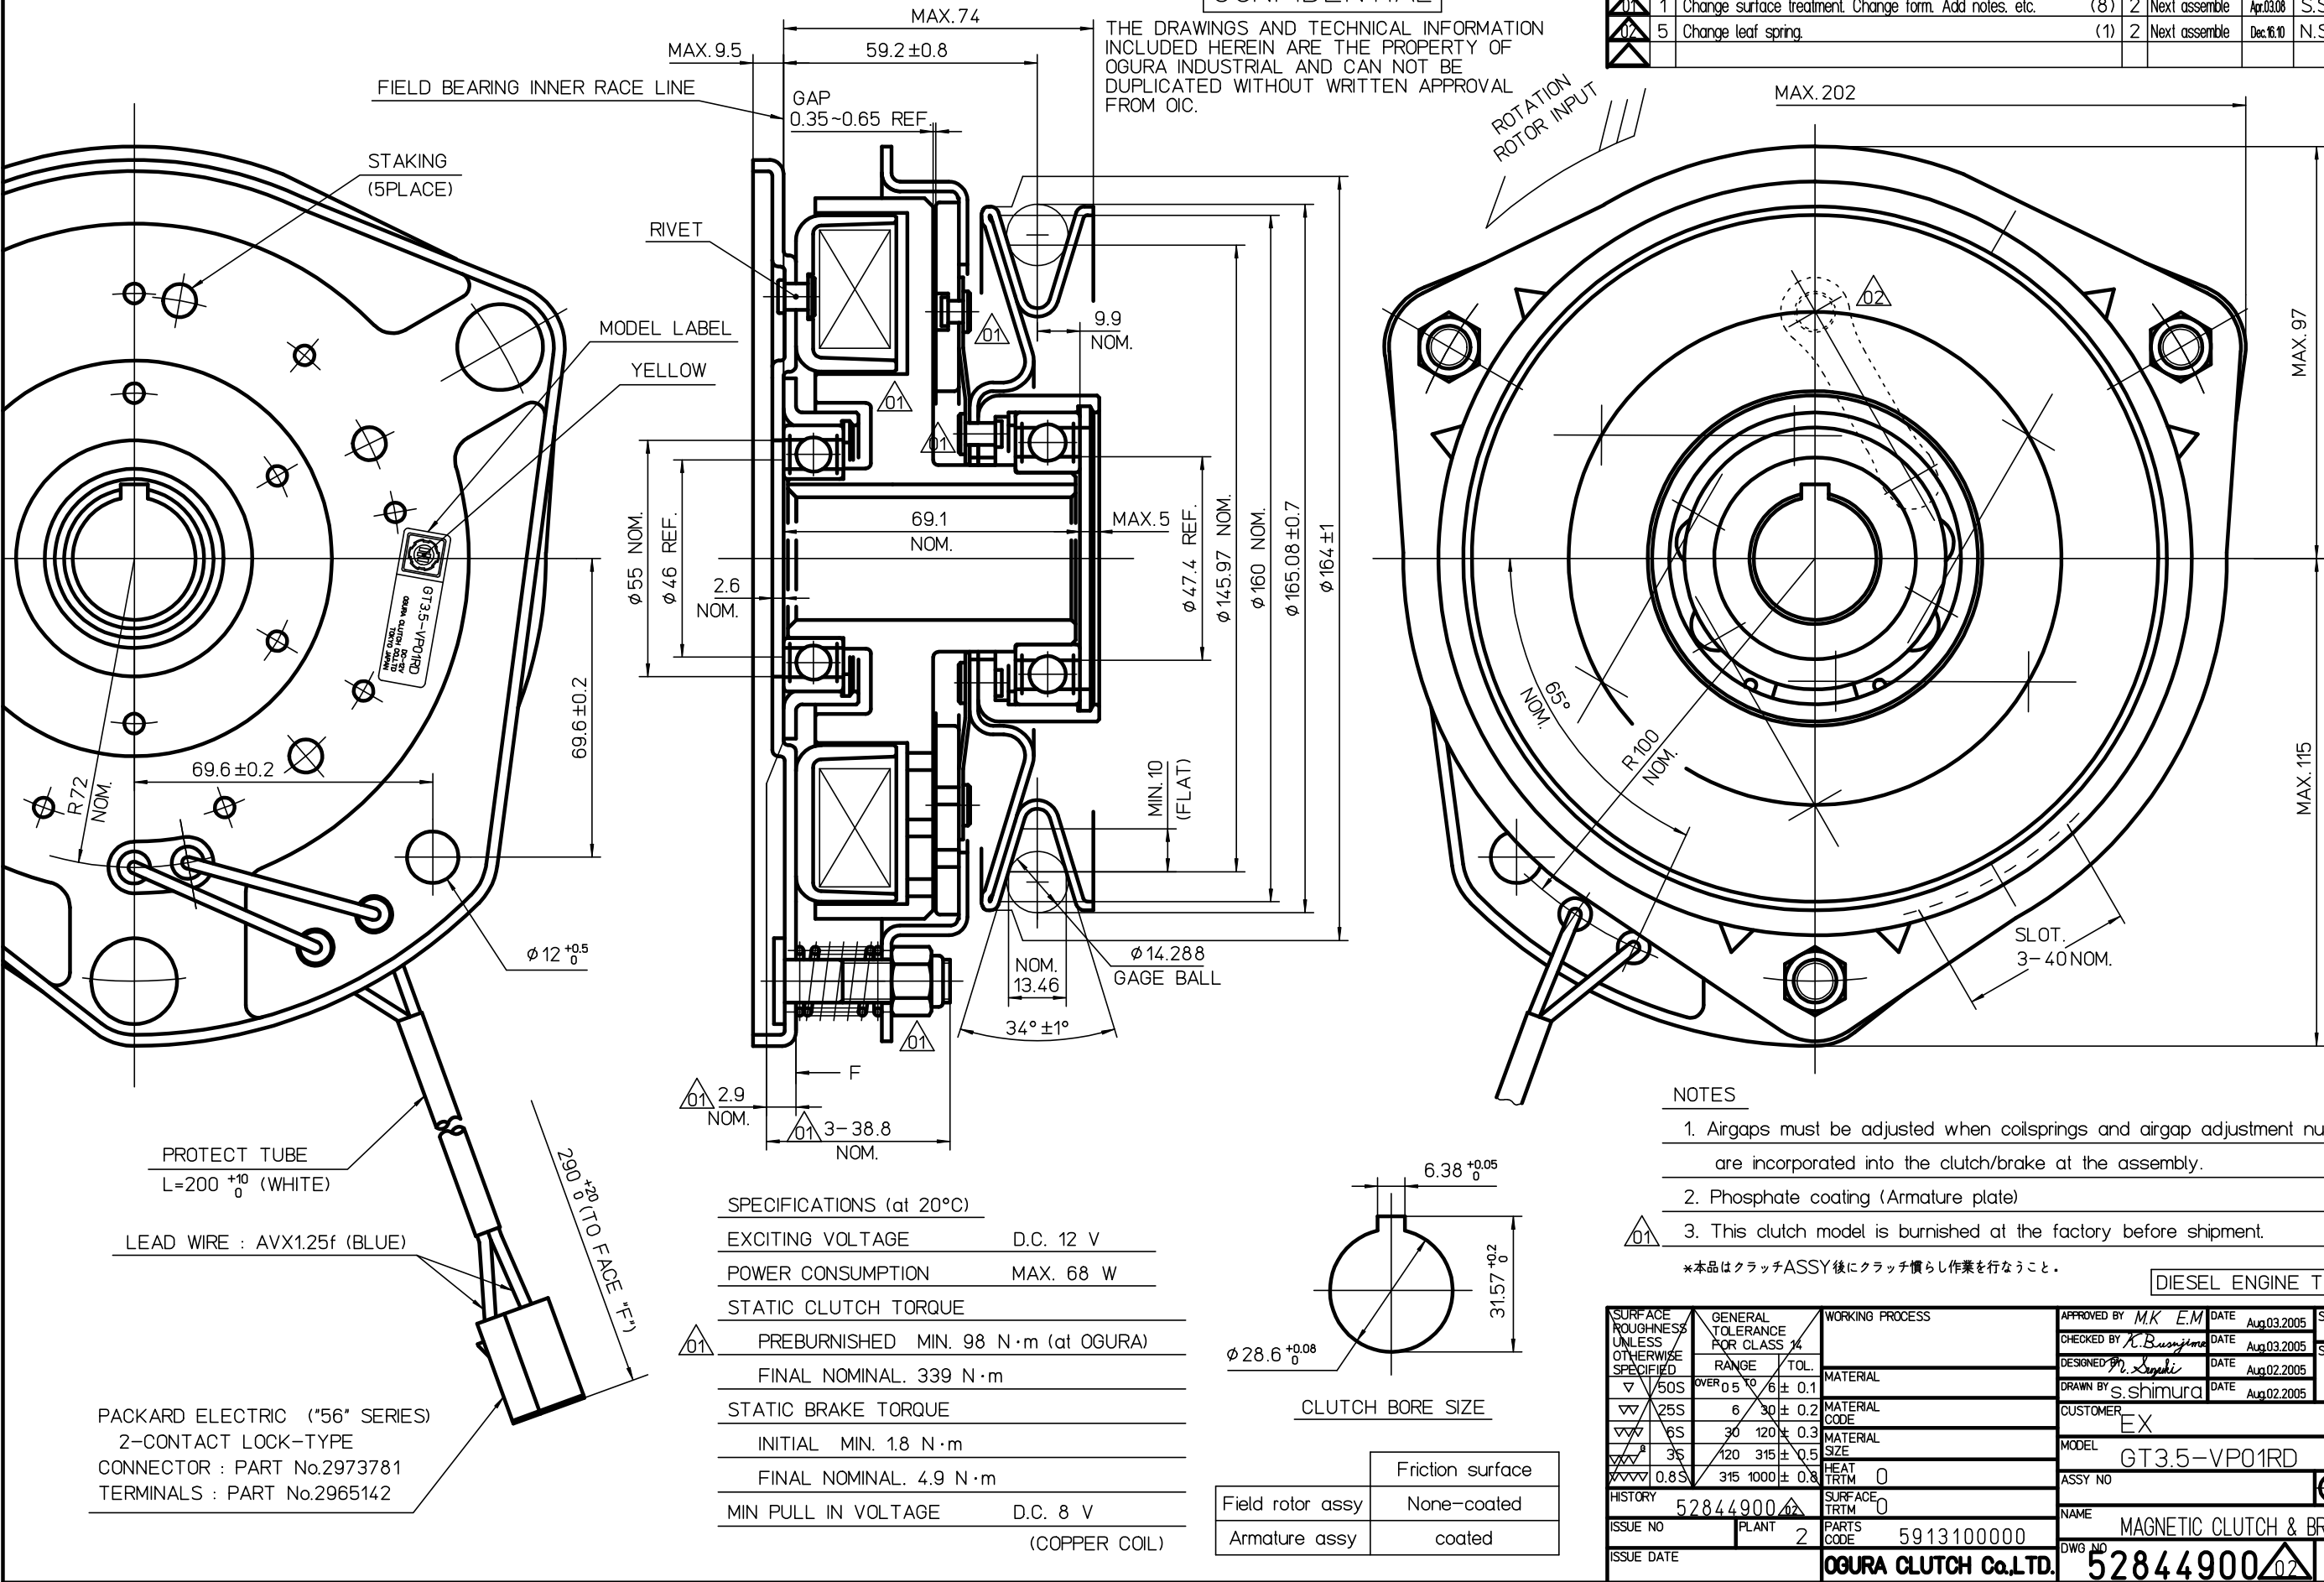

SPECIFICATIONS (at 20°C)

EXCITING VOLTAGE D.C. 12 V

POWER CONSUMPTION MAX. 68 W

STATIC CLUTCH TORQUE

PREBURNISHED MIN. 98 N·m (at OGURA)

FINAL NOMINAL. 339 N·m

STATIC BRAKE TORQUE

INITIAL MIN. 1.8 N·m

FINAL NOMINAL. 4.9 N·m

MIN PULL IN VOLTAGE D.C. 8 V

(COPPER COIL)