

REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY
△					
△					
△					




REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

ROTATION.
ROTOR INPUT.

MODEL LABEL

3-5/16-18UNC

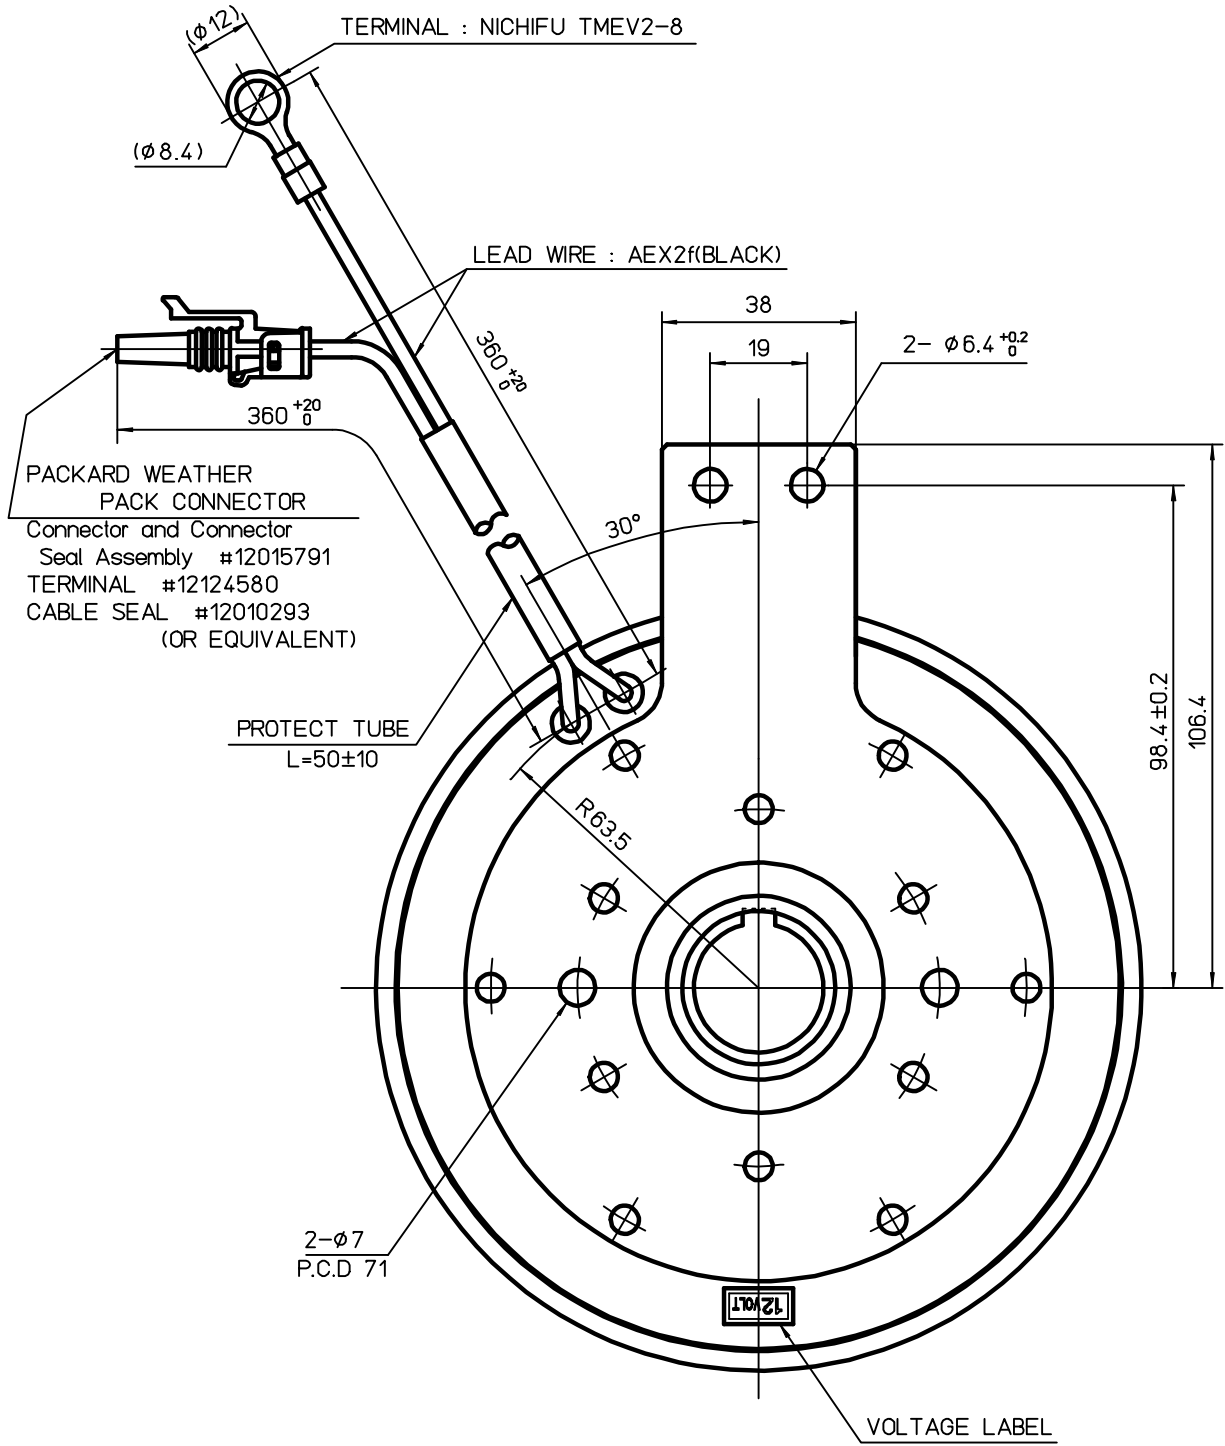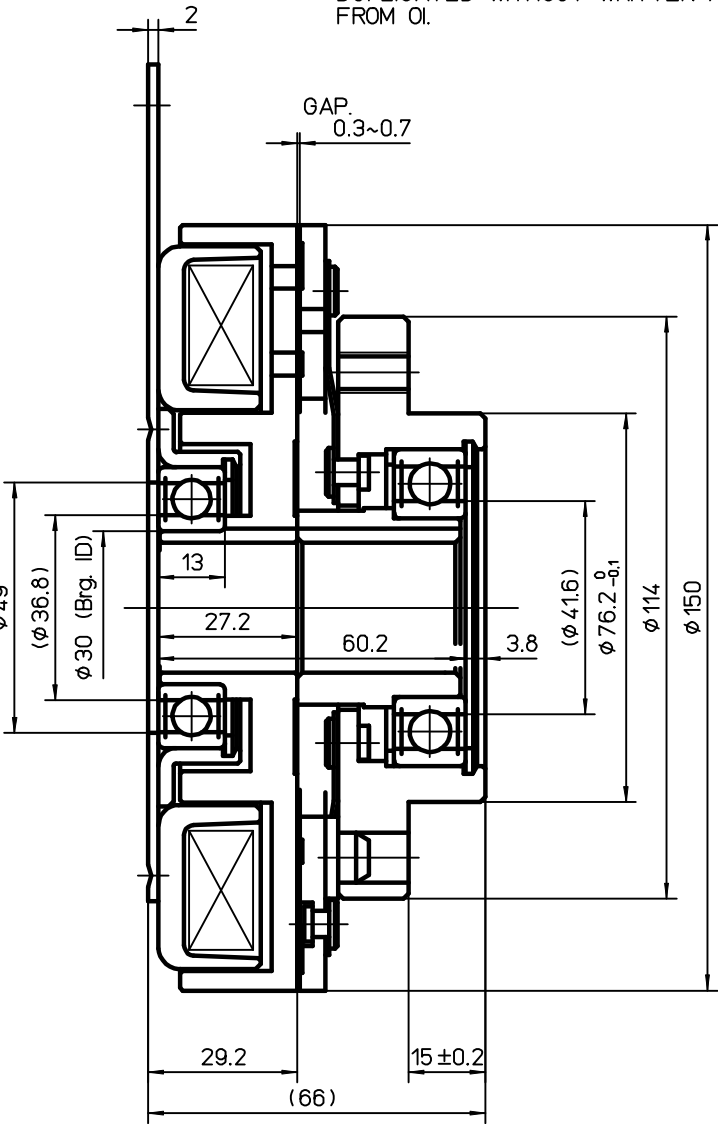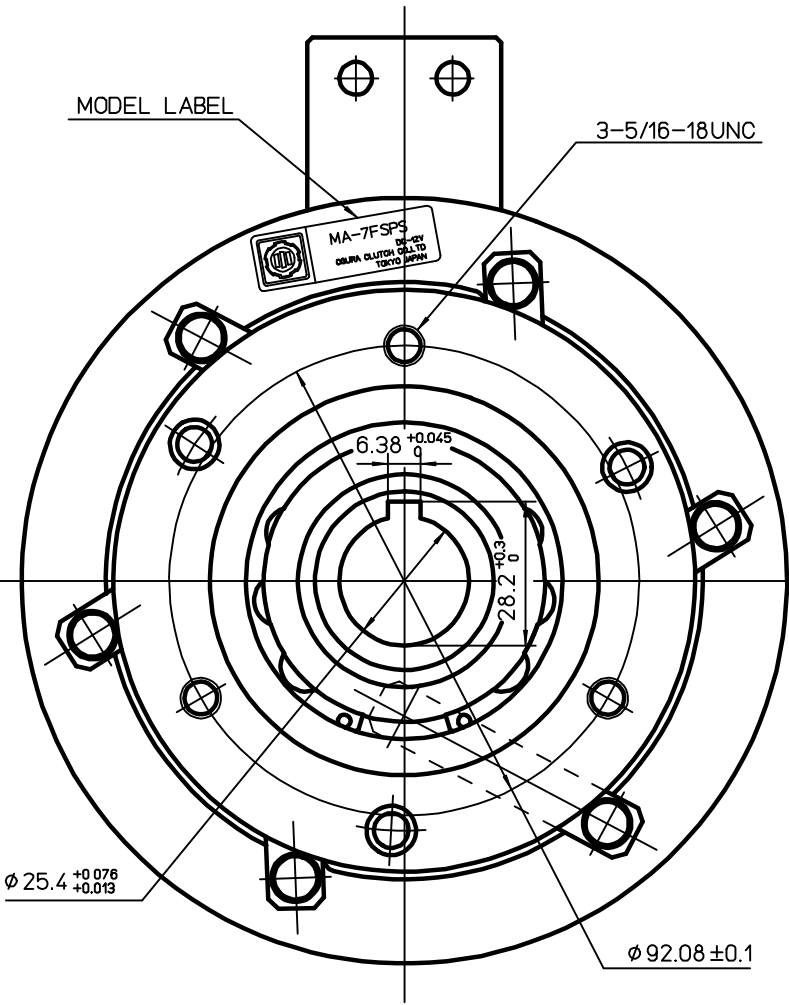

PACKARD WEATHER
PACK CONNECTOR
Connector and Connector
Seal Assembly #12015791
TERMINAL #12124580
CABLE SEAL #12010293
(OR EQUIVALENT)

PROTECT TUBE
L=50±10

2-φ7
P.C.D 71

VOLTAGE LABEL

SPECIFICATIONS (at20°C)

EXCITING VOLTAGE	D.C 12 V
POWER CONSUMPTION	MAX. 46.6 W
STATIC TORQUE	INITAL MIN 39 Nm
	FAINAL MIN. 149 Nm

NOTES

SURFACE TREATMENT :
BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
ARM. FRICTION SURFACE
RIVET (MFZn2-B)
CLUTCH BORE AND KEY

Field rotor assy	Friction surface
Armature assy	Coated
	None-coated

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY: F.M. MK	DATE: Aug.05.2005	SIZE: A2
▽ 5.0S	RANGE: 0.5 TO 6 ± 0.1	MATERIAL	CHECKED BY: K. B. B. B. B.	DATE: Aug.05.2005	SCALE: 1/1
▽ 2.5S	6 30 ± 0.2	MATERIAL CODE	DESIGNED BY: N. S. S. S. S.	DATE: Aug.05.2005	
▽ 1.6S	30 120 ± 0.3	MATERIAL SIZE	DRAWN BY: s.shimura	DATE: Aug.04.2005	
▽ 0.8S	120 315 ± 0.5	HEAT TRTMT	CUSTOMER: SWENSON		
	315 1000 ± 0.8	SURFACE TRTMT	MODEL: MA-7FSPS		
HISTORY: 52845700			ASSY NO:		
ISSUE NO:	PLANT: 2	PARTS CODE: 5913100000	NAME: MAGNETIC CLUTCH		
ISSUE DATE:		OGURA CLUTCH Co.,LTD.	DWG NO: 52845700		