



REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY

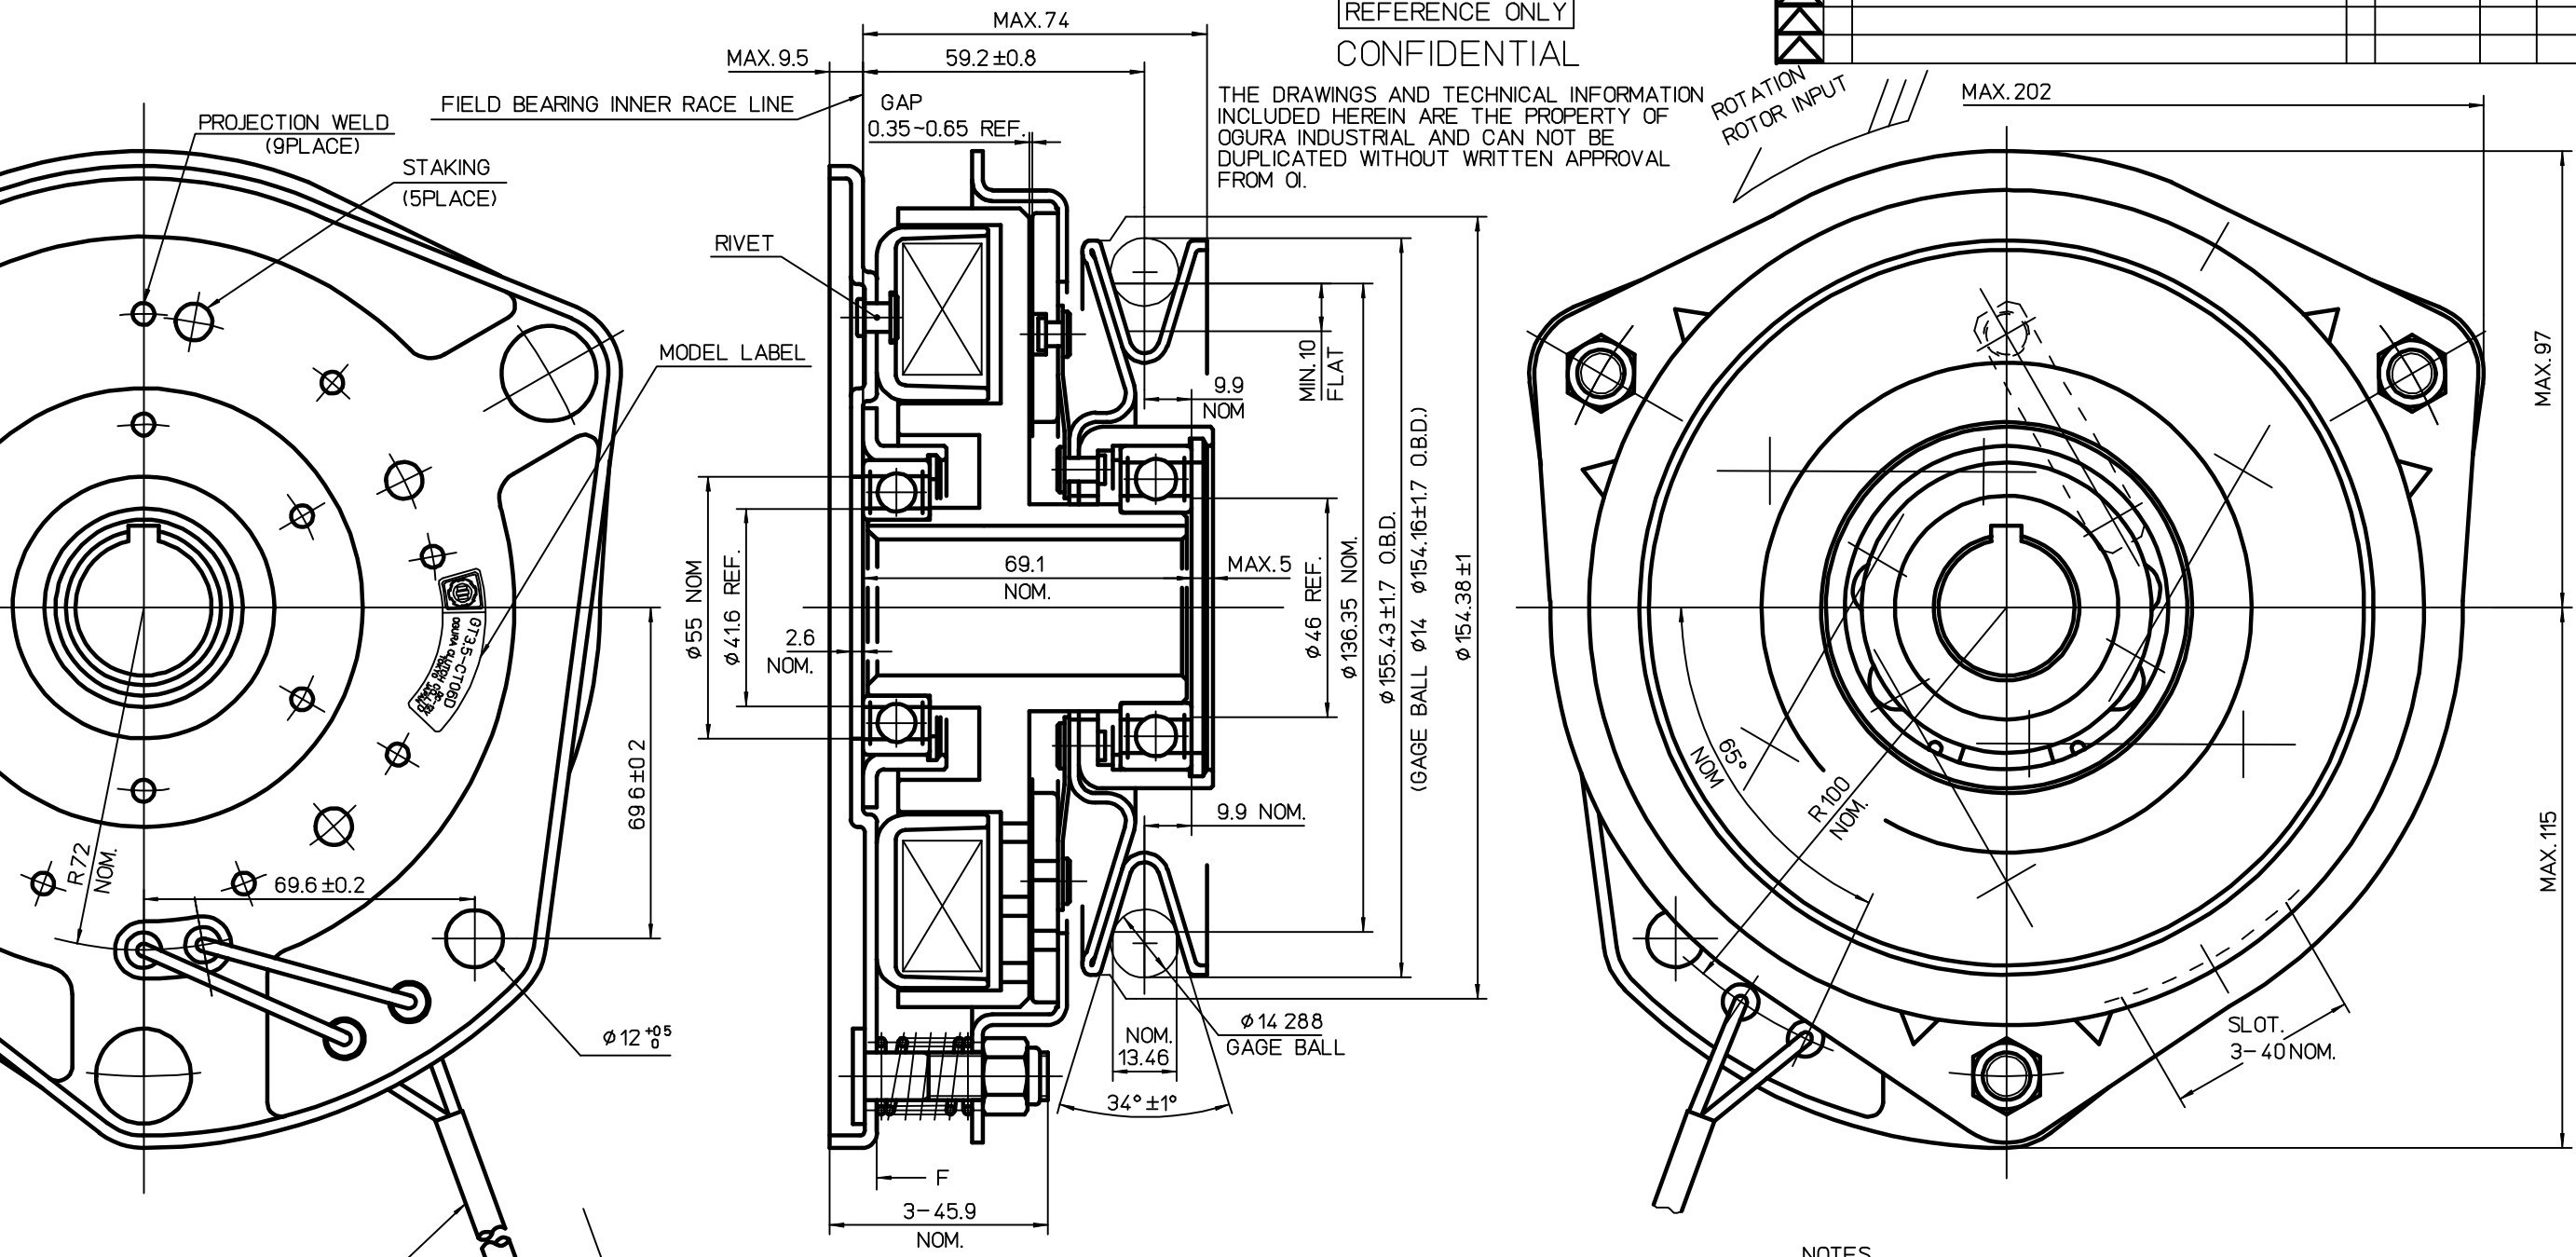

SPECIFICATIONS (at 20°C)	
EXCITING VOLTAGE	D.C. 12 V
POWER CONSUMPTION	MAX. 68 W
STATIC CLUTCH TORQUE	
INITIAL	MIN. 98 N·m
FINAL	NOMINAL. 339 N·m
STATIC BRAKE TORQUE	
INITIAL	MIN. 18 N·m
FINAL	NOMINAL. 4.9 N·m
MIN PULL IN VOLTAGE	D.C. 8 V
	(COPPER COIL)

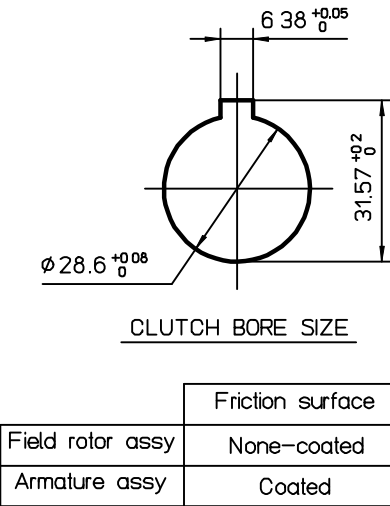

GENERAL TOLERANCE FOR CLASS 14		WORKING PROCESS		APPROVED BY E.M. M.K. DATE Dec.14.2005 SIZE A2	
SURF. AC. ROUGHNESS UNLESS OTHERWISE SPECIFIED	RANGE	TOL.	MATERIAL	CHECKED BY T. Buzjima DATE Dec.14.2005	SCALE 1
▽ 5.0S	OVER 0.5 TO 6	± 0.1	MATERIAL CODE	DESIGNED BY T. Sugaki DATE Dec.12.2005	1
▽ 2.5S	6 TO 30	± 0.2	MATERIAL CODE	DRAWN BY T. Sugaki DATE Dec.12.2005	1
▽ 1.6S	30 TO 120	± 0.3	MATERIAL CODE	CUSTOMER EX	
▽ 1.2S	120 TO 315	± 0.5	MATERIAL CODE	MODEL GT3.5-CT06D	
▽ 0.8S	315 TO 1000	± 0.8	HEAT TRTMT 0	ASSY NO	
HISTORY			SURF. AC. TRTMT 0	NAME MAGNETIC CLUTCH & BRAKE	
ISSUE NO	PLANT 2	PARTS CODE 5913100000		DWG NO	
ISSUE DATE		OGURA CLUTCH Co.,LTD.		52885200	0.0