


REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
1	Add dimension	(1)	1	Immediately	May.07 S.S. K.B.

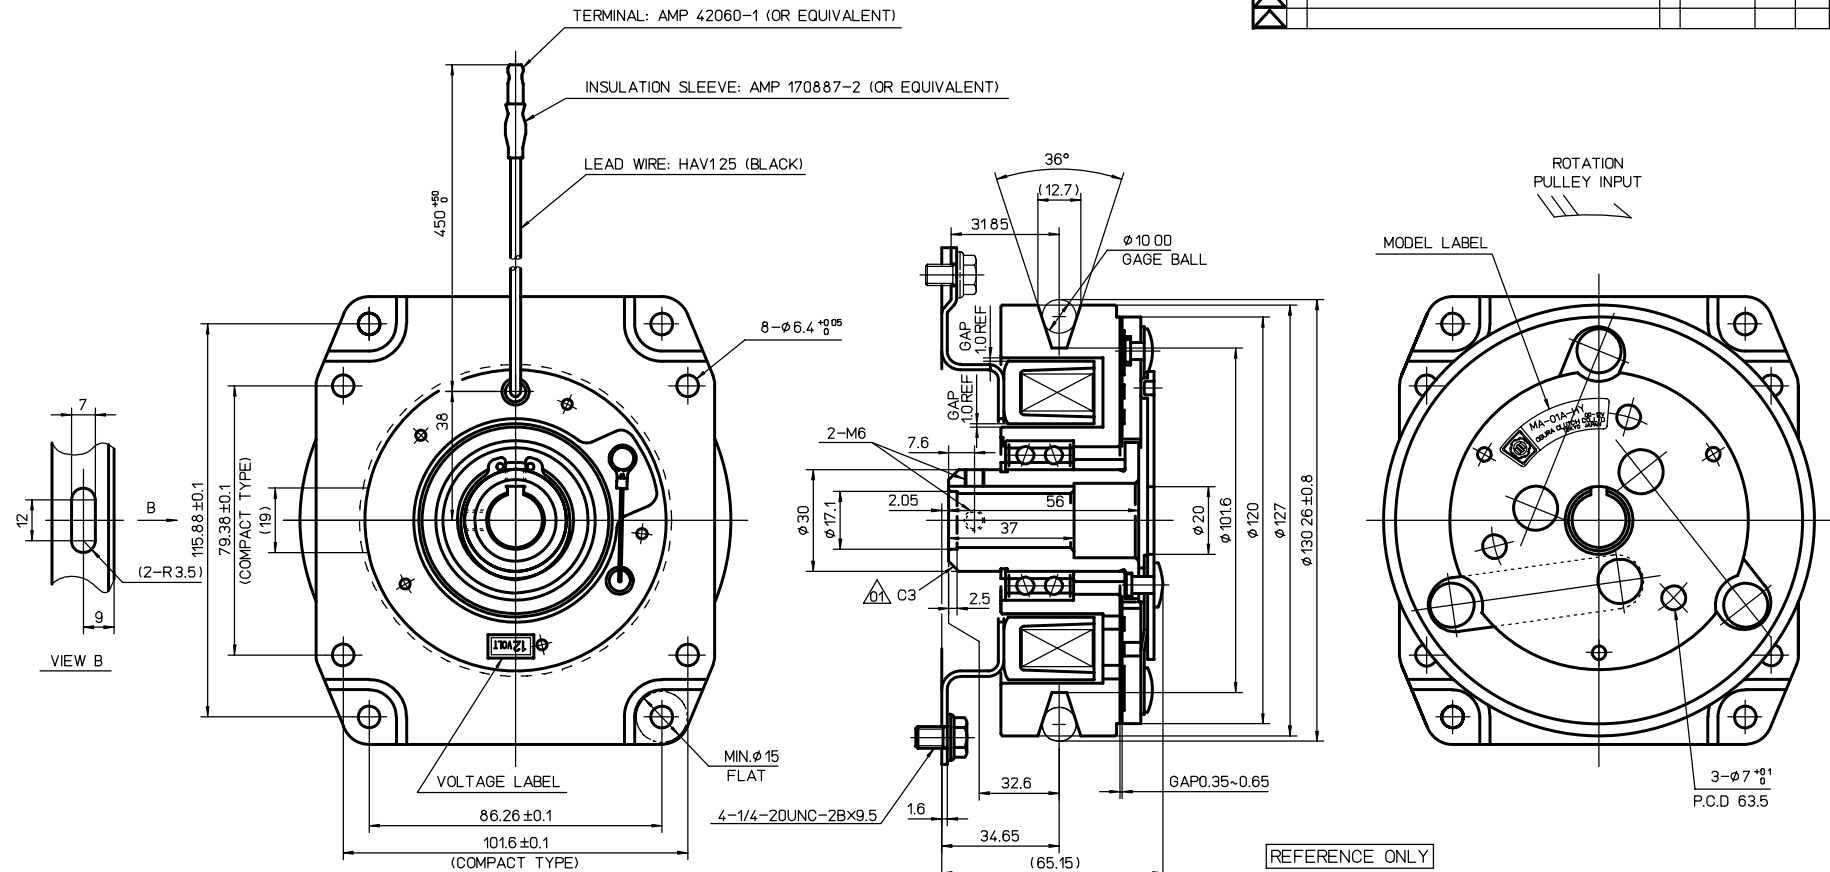

REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.


	Friction surface
Rotor assy	None-coated
Armature assy	None-coated

SPECIFICATIONS(at 20°C)

- EXCITING VOLTAGE : D.C.12 V
- STATIC TORQUE
INITIAL : 25 N·m
FINAL : NOMINAL 62 N·m
- POWER CONSUMPTION : MAX.45 W
- ROTATION : C.W.

NOTES

- SURFACE TREATMENT
BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
- FRICITION SURFACE
- RIVET (MFZn2-B)
- HUB INNER DIA. AND M6
- FIELD CORE COIL ASSY (3MFZn8)
- COLLAR (3MFZn8)



SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS	WORKING PROCESS	APPROVED BY	DATE	SIZE
▽ 50S	RANGE	MATERIAL	CHECKED BY	DATE	SCALE
▽ 25S	OVER 0.5 TO 6 ± 0.1	MATERIAL	DESIGNED BY	DATE	1
▽ 12.5	6 TO 30 ± 0.2	MATERIAL	DRAWN BY	DATE	1
▽ 6.3	30 TO 120 ± 0.3	MATERIAL	CUSTOMER	DATE	
▽ 3.15	120 TO 315 ± 0.5	HEAT TREAT	MODEL		
▽ 1.6	315 TO 1000 ± 0.8	SURFACE TREAT	ASSY NO		
HISTORY	53183000	PARTS CODE	NAME		
ISSUE NO	PLANT	5913100000	MAGNETIC CLUTCH		
ISSUE DATE	2	OGURA CLUTCH Co.LTD.	DWS NO		
		53183000			

出荷時のクラッチ吸引電圧は、D.C. 7.5V以下