
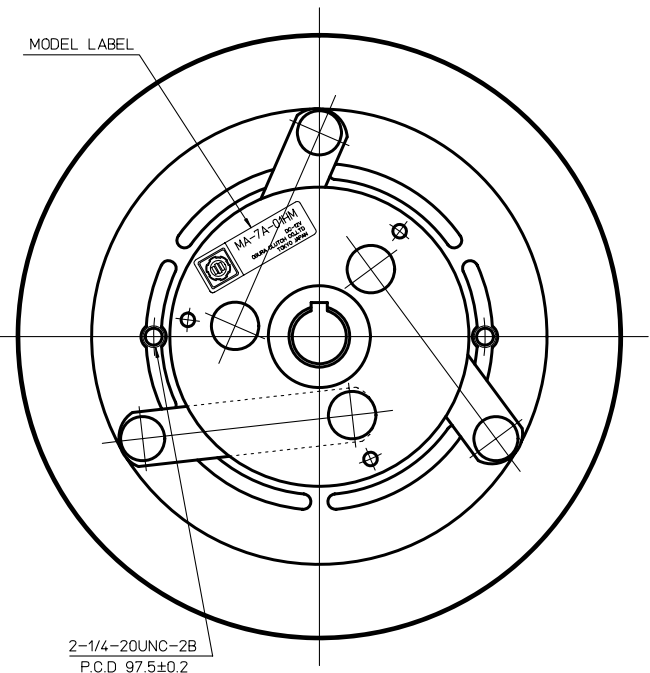



REV	REVISION STATUS	NOTE	DATE	CHK	BYCHK	BY
△						
△						
△						

REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

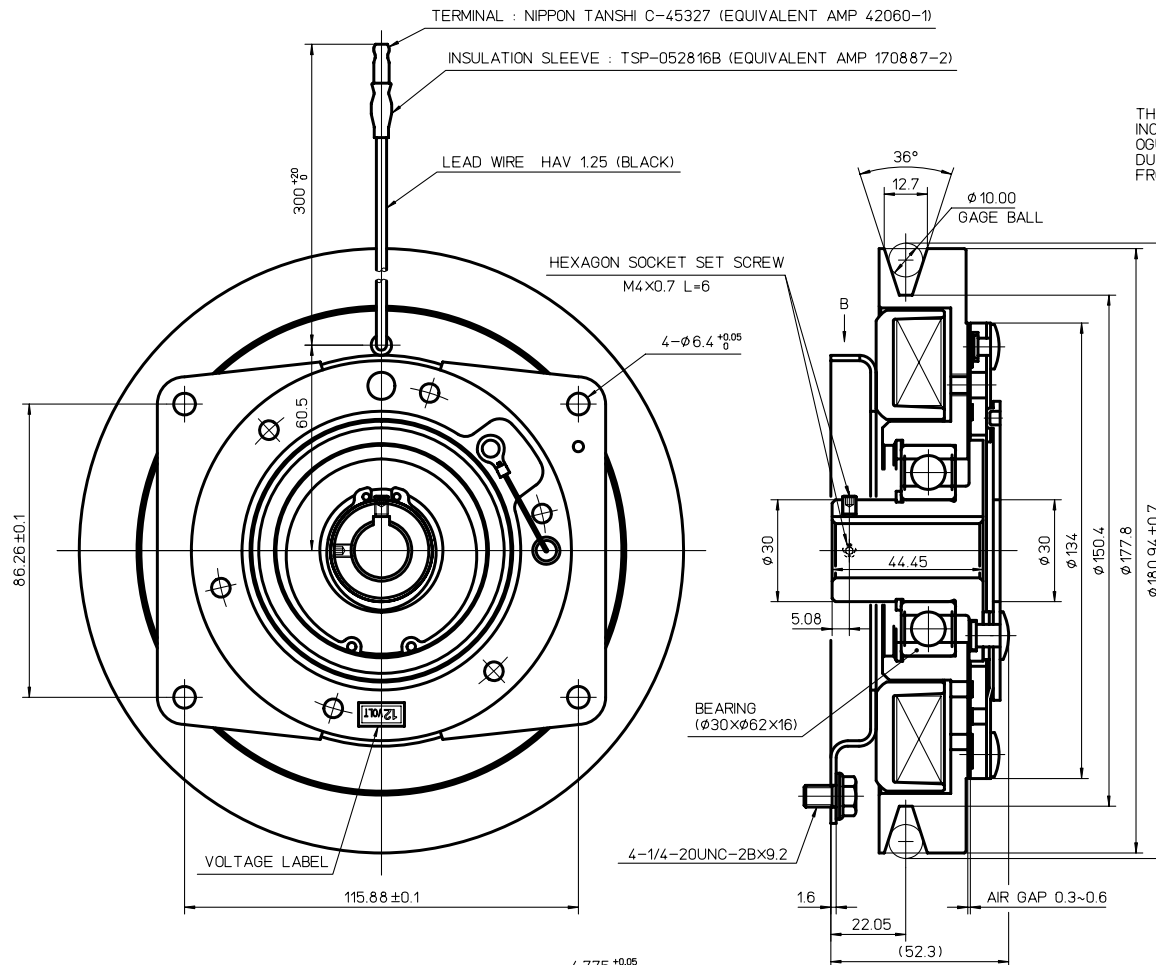

	Friction surface treatment
Rotor assy	None-coated
Armature assy	None-coated

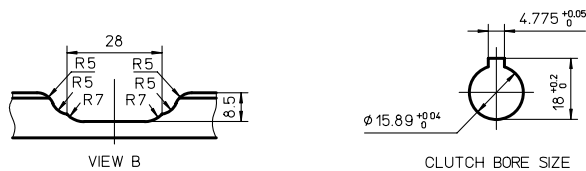

NOTE

Hex-chrome free zinc plating : 3MFZn8 (Rivet and Bolt : 3MFZn5)

SPECIFICATIONS(at 20°C)

1. EXCITING VOLTAGE : D.C.12 V
 2. POWER CONSUMPTION : MAX.43.3 W
 3. STATIC TORQUE
- INITIAL : 39 N·m
FINAL : NOMINAL 101 N·m
(ALUMINUM COIL)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY: <i>M. Kato</i>	DATE	Dec.06.2007	SIZE	A2
▽ 50S	RANGE OVER 0.5 1/6 ± 0.1	MATERIAL	CHECKED BY: <i>K.B.N.S.</i>	DATE	Dec.06.2007	SCALE	1/1
▽ 25S	6 30 ± 0.2	MATERIAL	DESIGNED BY: <i>y.izuka</i>	DATE	Dec.06.2007		
▽ 12.5S	30 120 ± 0.3	MATERIAL	DRAWN BY: <i>s.shimura</i>	DATE	Dec.04.2007		
▽ 6.3S	120 315 ± 0.5	MATERIAL	CUSTOMER				
▽ 3.15S	315 1000 ± 0.8	MATERIAL	MODEL	MA-7A-01HM			
HISTORY	53310300	SURFACE TREATMENT	ASSY NO				
ISSUE NO	PLANT	PARTS CODE	NAME	MAGNETIC CLUTCH			
ISSUE DATE		5113100000	DWG NO	53310300			
		OGURA CLUTCH Co.LTD.					