


REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
△					
△					
△					



ROTATION.
ROTOR INPUT.

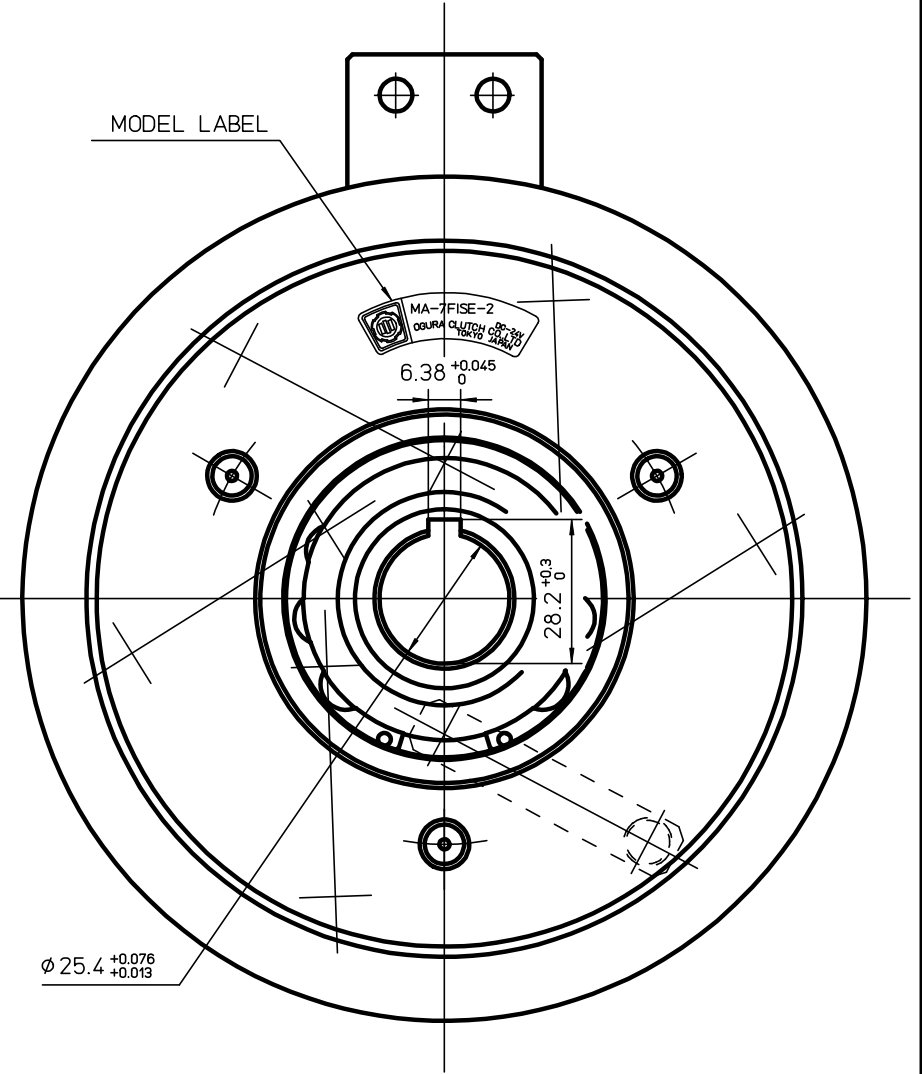

CUSTOMER: ISE CORPORATION

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY <i>M. Hato</i>	DATE June.02.2008	SIZE A2
▽ 50S	RANGE 0.5 TO 6 ± 0.1	MATERIAL	CHECKED BY <i>T. Iwasawa</i>	DATE June.02.2008	SCALE 1 / 1
▽ 25S	6 30 ± 0.2	MATERIAL CODE	DESIGNED BY <i>N. Sugita</i>	DATE May.29.2008	
▽ 12.5S	30 120 ± 0.3	MATERIAL SIZE	DRAWN BY <i>M. Arai</i>	DATE May.29.2008	
▽ 6.3S	120 315 ± 0.5	HEAT TRTMT 0	CUSTOMER EX		
▽ 3.15S	315 1000 ± 0.8	SURFACE TRTMT 0	MODEL MA-7FISE-2		
HISTORY 53351600	PLANT 2	PARTS CODE 5913200000	ASSY NO		
ISSUE NO			NAME MAGNETIC CLUTCH		
ISSUE DATE			DWG NO 53351600		
			OGURA CLUTCH Co.,LTD.		

DEUTSCH
2WAY RECEPTACLE : DT04-2P-E005
PINS : 1060-16-0122
SECONDARY LOCK : W2P

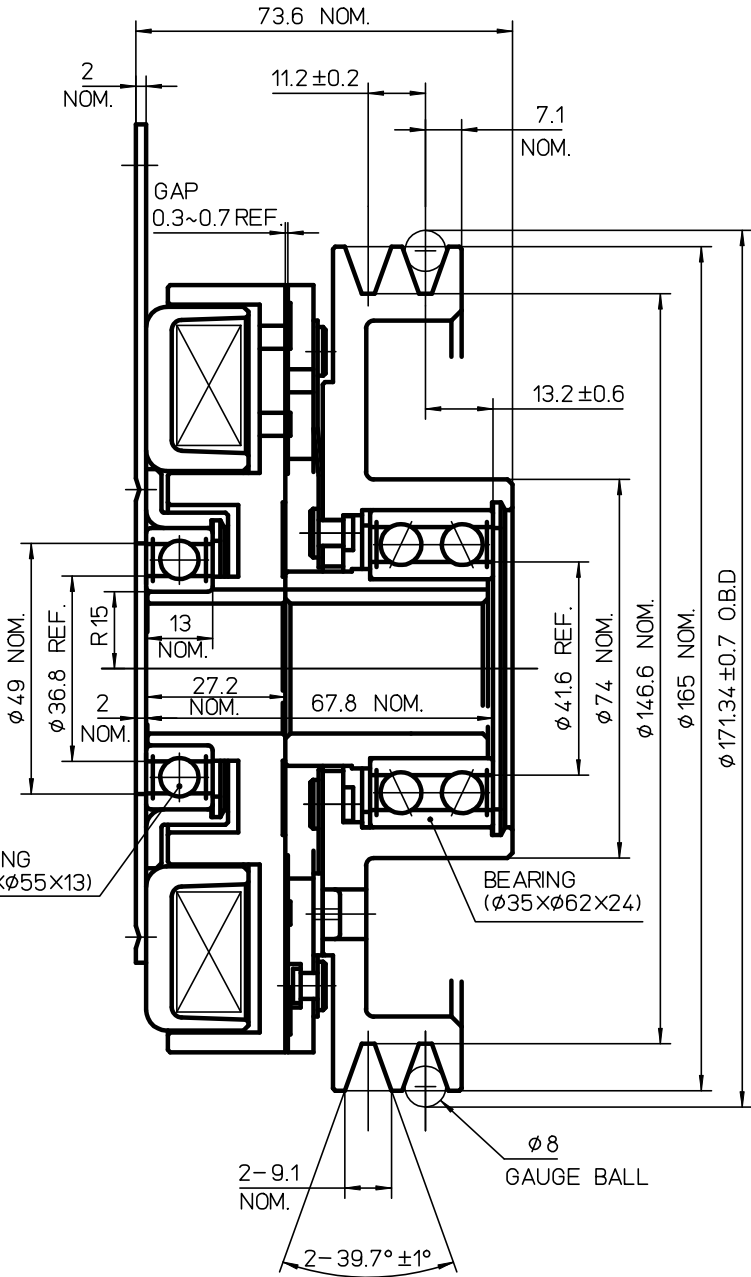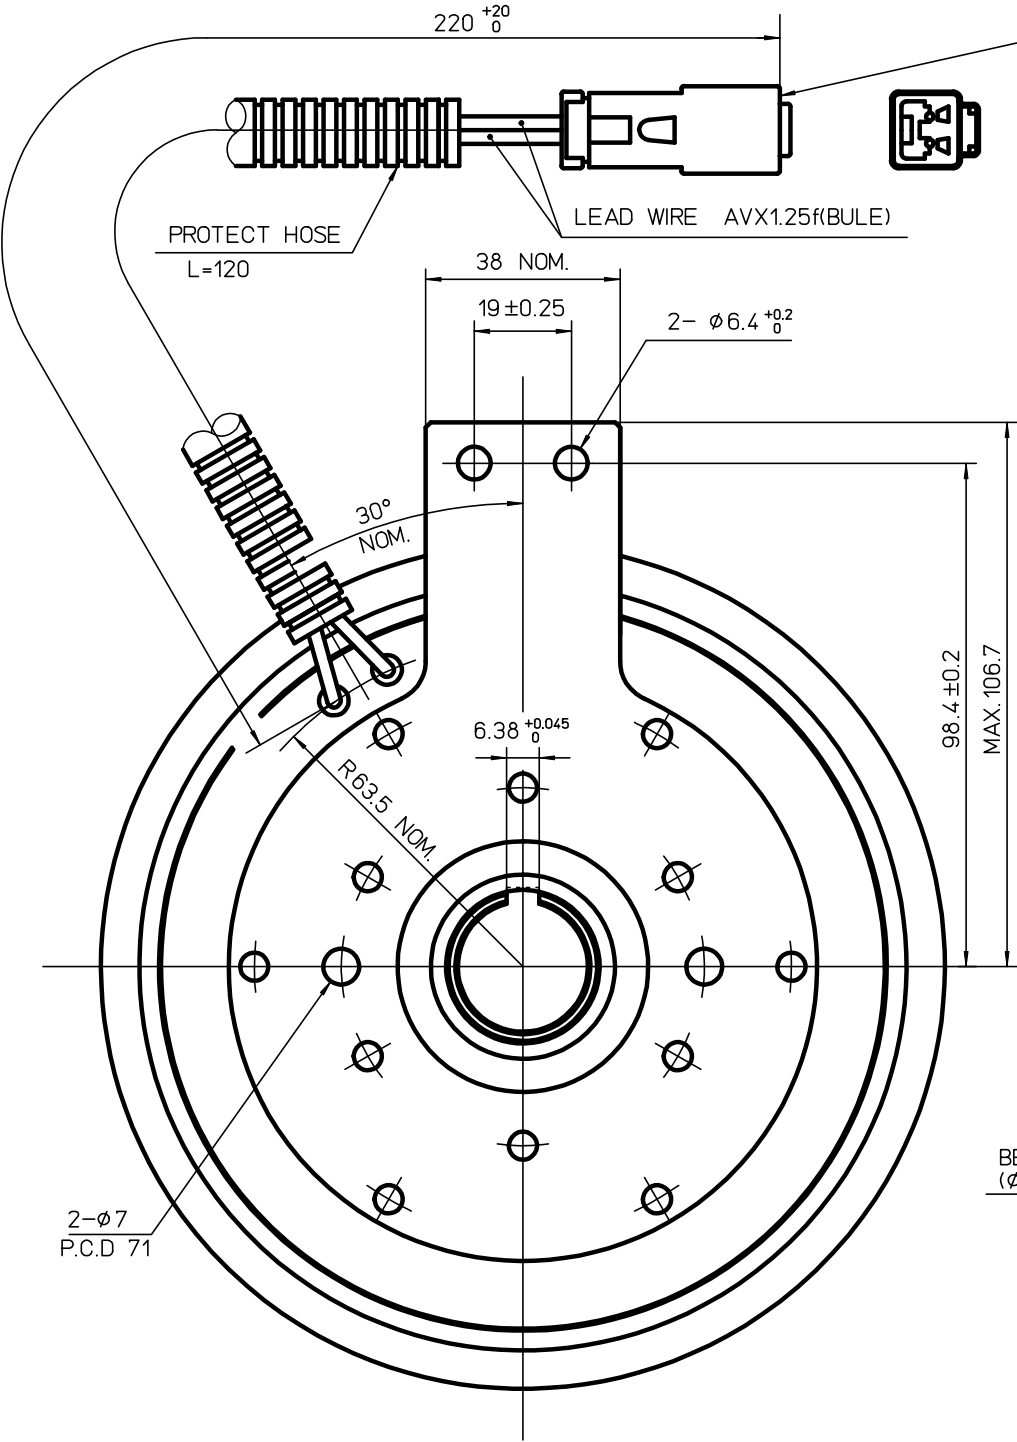

SPECIFICATIONS(at 20°C)	
EXCITING VOLTAGE	D.C. 24 V
POWER CONSUMPTION	MAX. 52 W
STATIC CLUTCH TORQUE	
INITIAL	MIN. 49 N·m
FINAL NOMINAL	149 N·m
MIN PULL IN VOLTAGE	D.C. 16 V

REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.

	Friction surface
Field rotor assy	None-coated
Armature assy	None-coated