

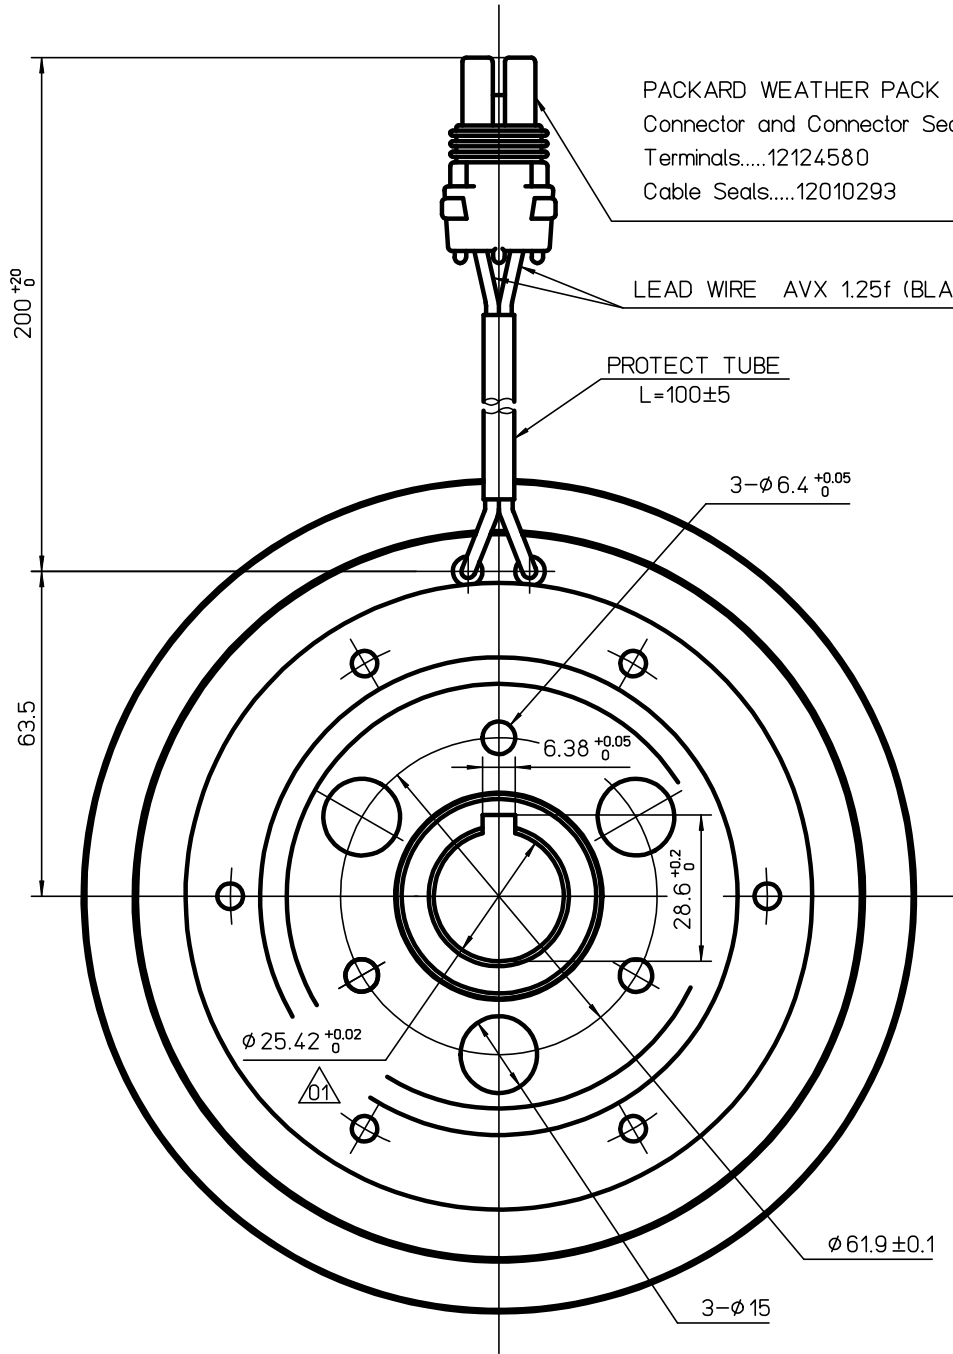
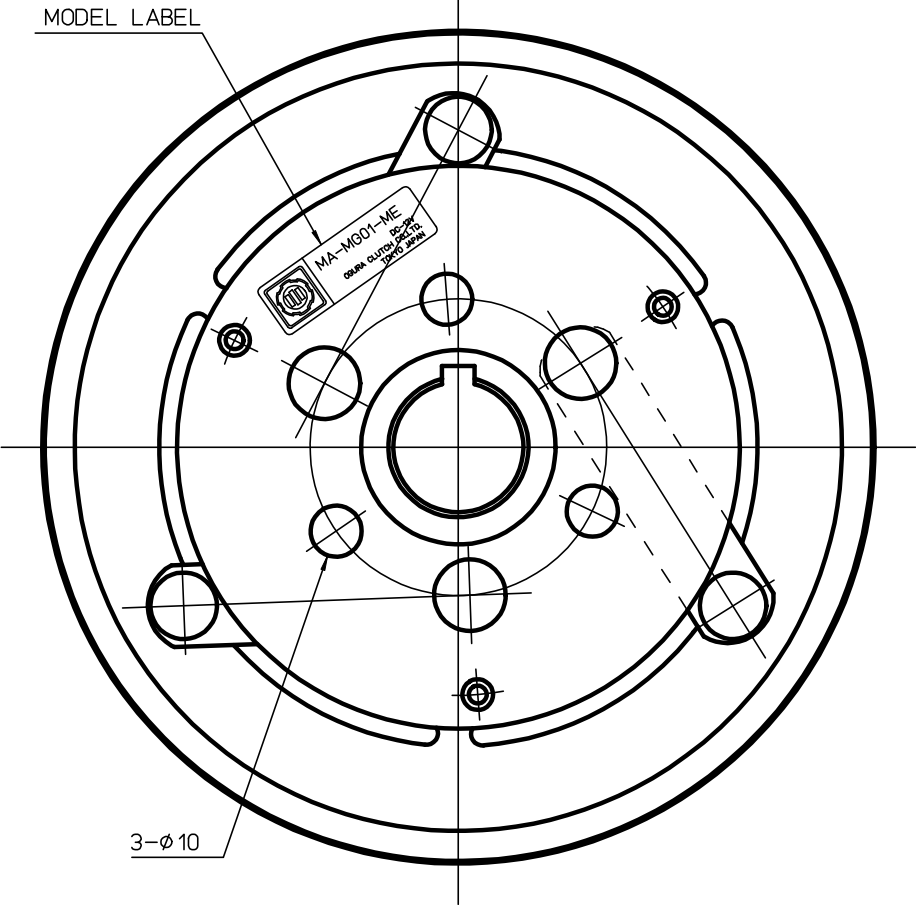


REV	REVISION STATUS		NOTE		DATE	CHG BY	CHK BY	
0	1	Chnagne tolerance. (+0.02/0 was +0.05/+0.02)	(1)	1	Immediately	Nov.21.08	S.S	N.S.

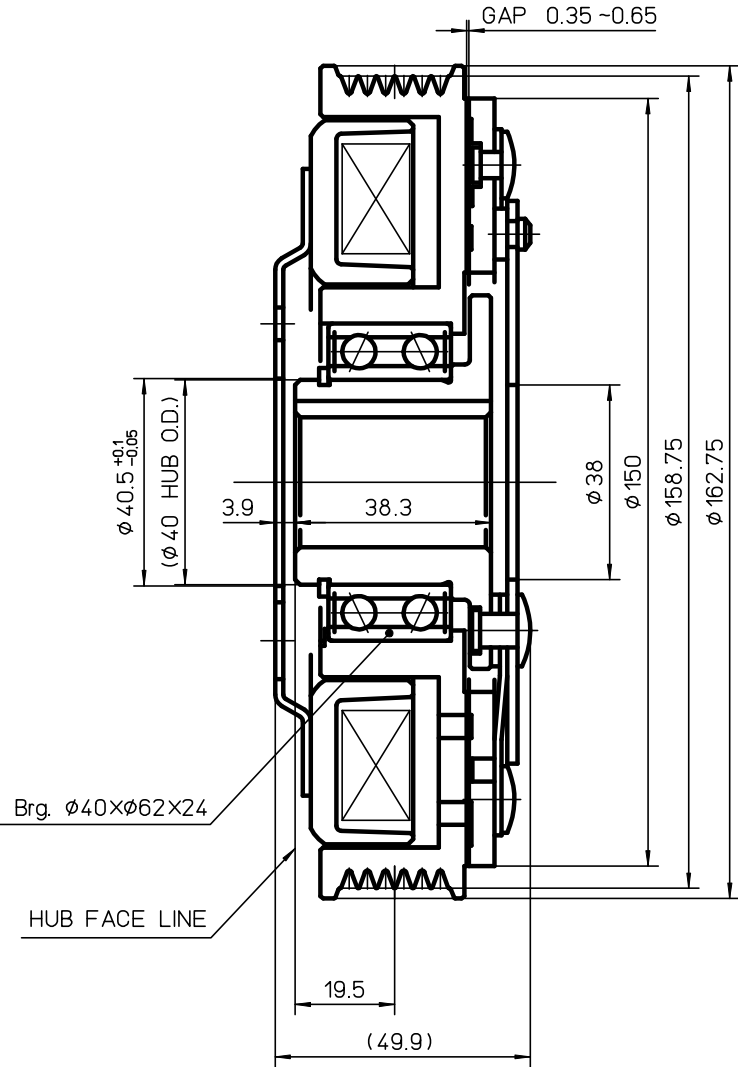


REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.



	Friction surface
Rotor assy	None-coated
Armature assy	None-coated

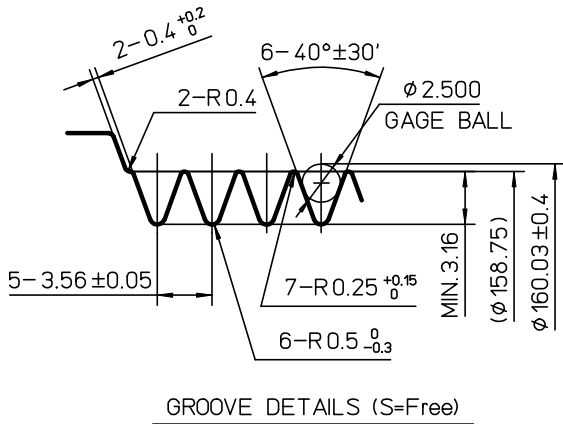

SPECIFICATIONS (at 20°C)

- EXCITING VOLTAGE : D.C.12 V
- BELT : PLY "V" 6K TYPE
- STATIC TORQUE
STATIC : 39 Nm
FINAL NOMINAL : 101 Nm
- POWER CONSUMPTION : MAX.47 W
- ROTATION : C.W.
(COPPER COIL)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY <i>M. Hata</i>	DATE Sep.22.2008	SIZE A2
∇ 50S	RANGE OVER 0.5 TO 6	TOL. ± 0.1	CHECKED BY <i>M. Hata</i>	DATE Sep.22.2008	SCALE 1/1
∇ 25S	6	30 ± 0.2	DESIGNED BY <i>M. Shimura</i>	DATE Sep.19.2008	
∇ 12.5S	30	120 ± 0.3	DRAWN BY <i>s.shimura</i>	DATE Sep.19.2008	
∇ 6.3S	120	315 ± 0.5	CUSTOMER EX		
∇ 3.15S	315	1000 ± 0.8	MODEL MA-MG01-ME		
HISTORY 53375800		HEAT TRTM 0	ASSY NO		
ISSUE NO	PLANT 2	SURFACE TRTM 0	NAME MAGNETIC CLUTCH		
ISSUE DATE		PARTS CODE 5913100000	DWG NO 53375800		
		OGURA CLUTCH Co.,LTD.			