

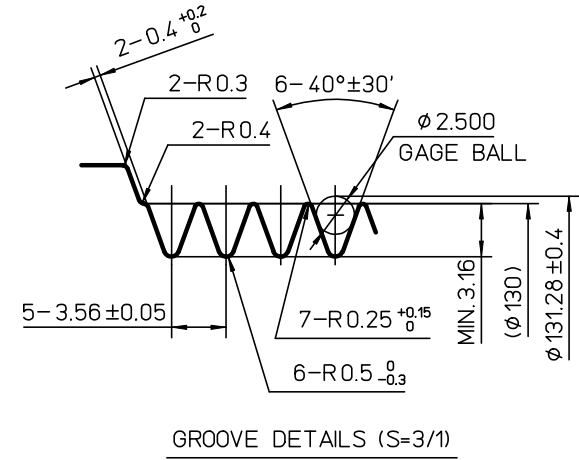
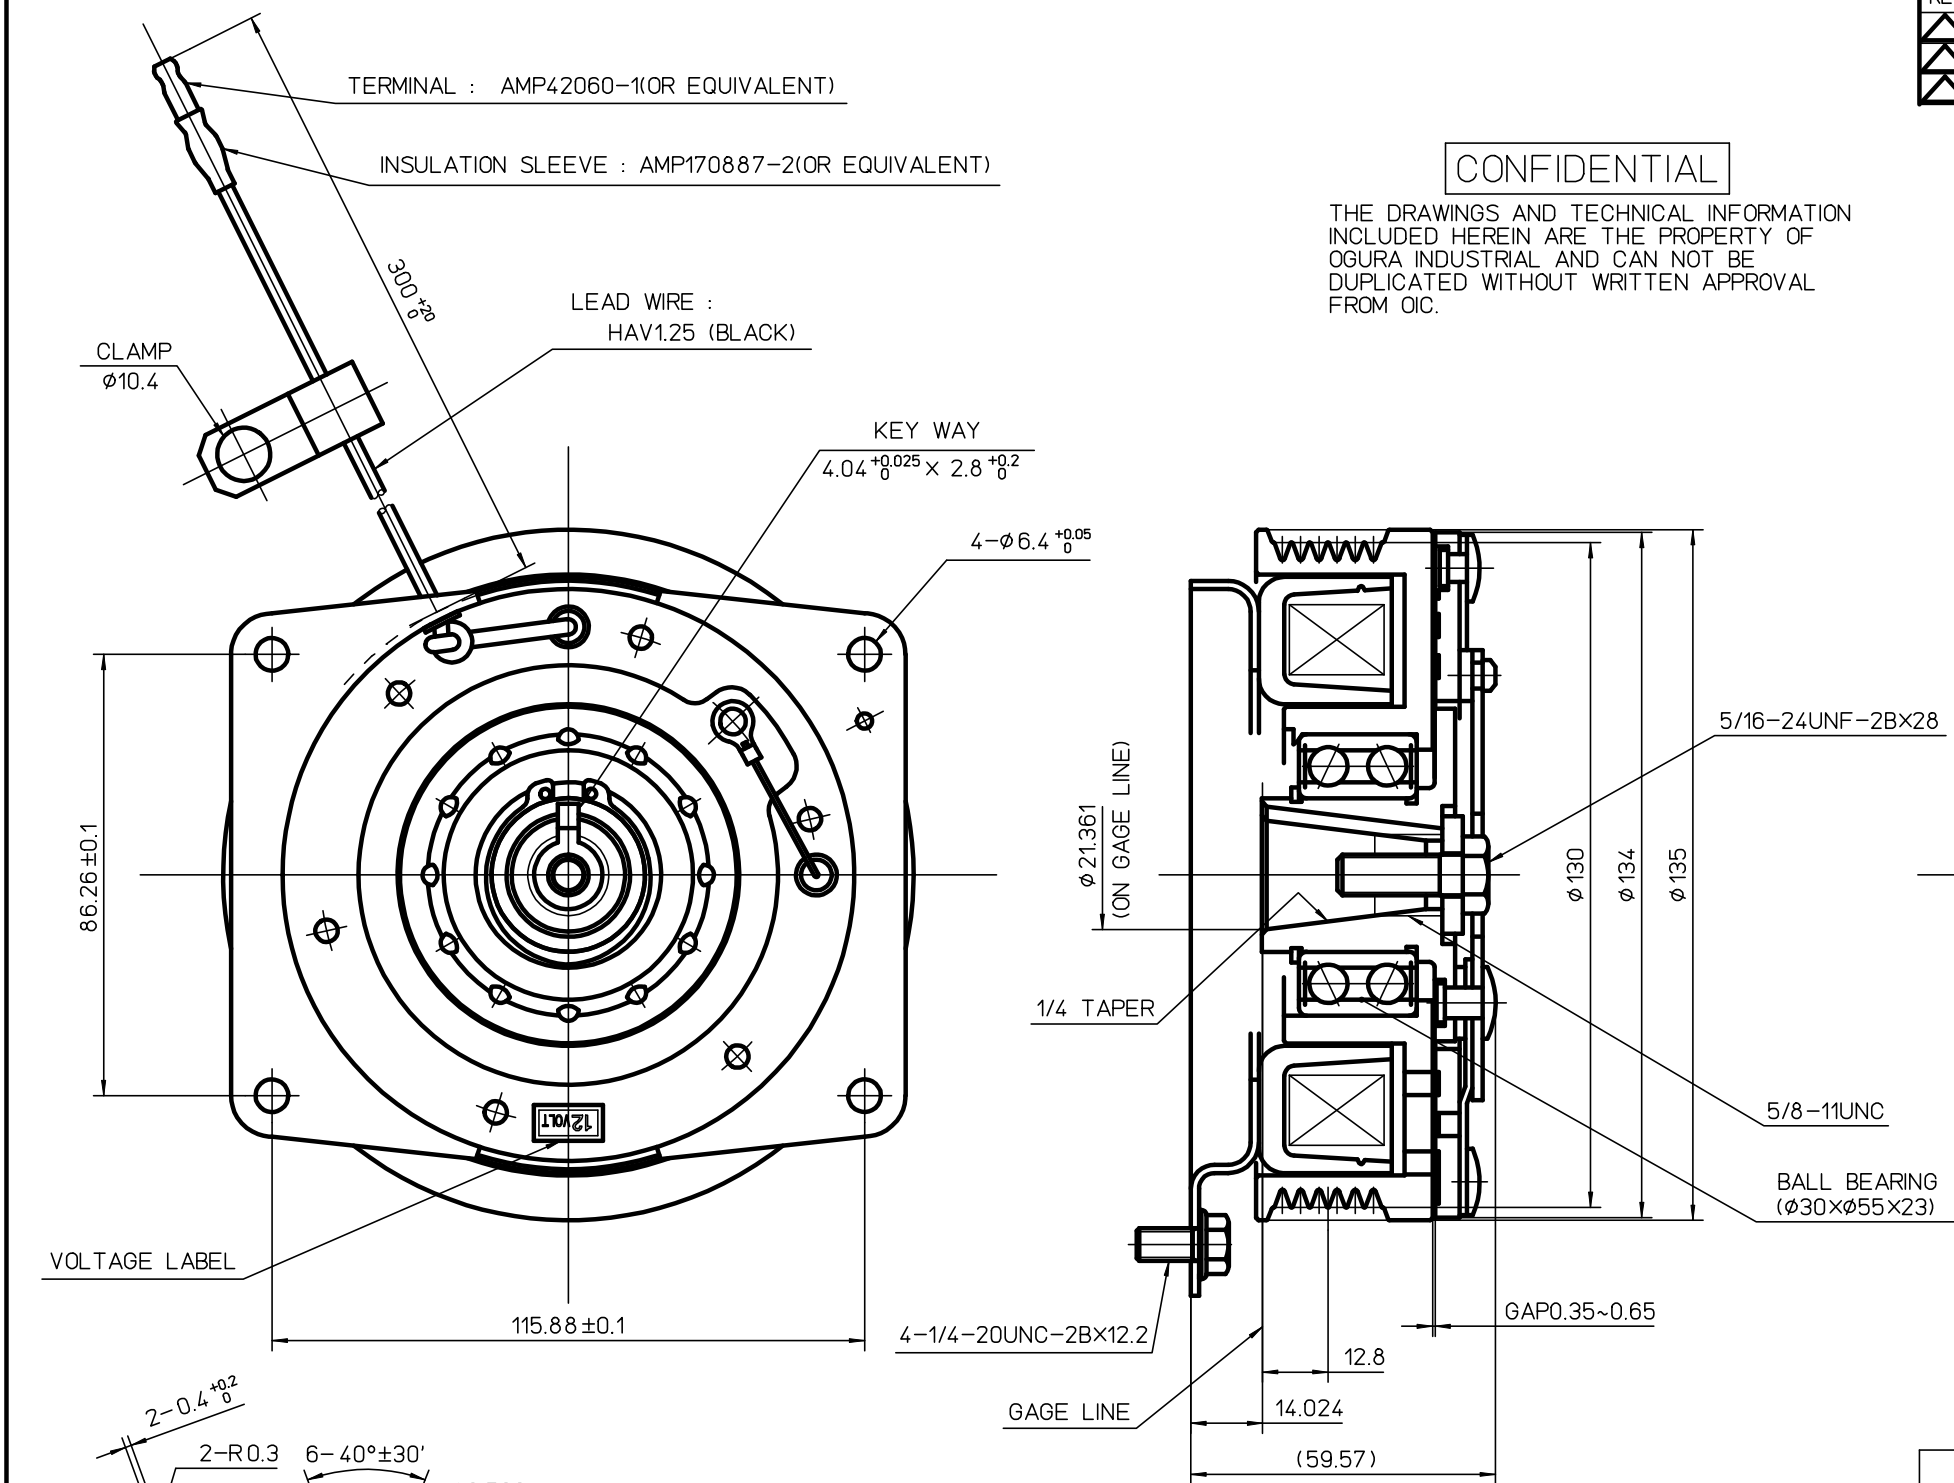


REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY
△					
△					
△					

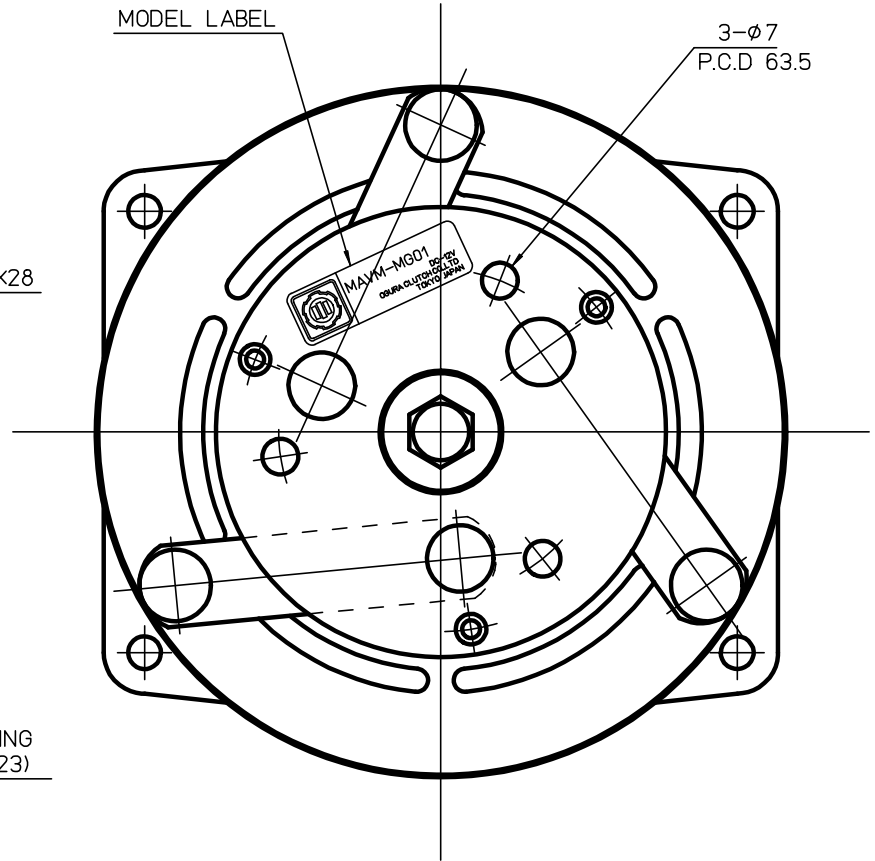

- SPECIFICATIONS (at20°C)
1. EXCITING VOLTAGE : D.C.12 V
 2. BELT : PLY *V* 6K TYPE
 3. STATIC TORQUE
INITIAL : 75 Nm
AFTER BURNISHING : 102 Nm
 4. POWER CONSUMPTION : MAX.47 W
 5. ROTATION : C.W.
- (COPPER COIL)

- NOTES
- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
1. FRICTION SURFACE
 2. RIVET (3MFZn5)
 3. HUB INNER DIA.
 4. FIELD CORE COIL ASSY (3MFZn8)



	Friction surface
Rotor assy	None-coated
Armature assy	None-coated

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY: Y. Uemura	DATE: May.13.2010	SIZE: A2
▽ 50S	RANGE OVER 0.5 TO 6 ± 0.1	MATERIAL	CHECKED BY: Y. H. , N.S.	DATE: May.12.2010	SCALE: 1/1
▽ 25S	6 30 ± 0.2	MATERIAL CODE	DESIGNED BY: Morozumi	DATE: May.12.2010	
▽ 12.5S	30 120 ± 0.3	MATERIAL SIZE	DRAWN BY: m. Arai	DATE: May.11.2010	
▽ 6.3S	120 315 ± 0.5	HEAT TRTMT	CUSTOMER: EX		
▽ 3.15S	315 1000 ± 0.8	SURFACE TRTMT	MODEL: MAVM-MG01		
HISTORY: 53481800	PLANT: 2	PARTS CODE: 5913100000	ASSY NO:		
ISSUE NO:			NAME: MAGNETIC CLUTCH		
ISSUE DATE:		OGURA CLUTCH Co.,LTD.	DWG NO: 53481800		