


REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
△					
△					
△					

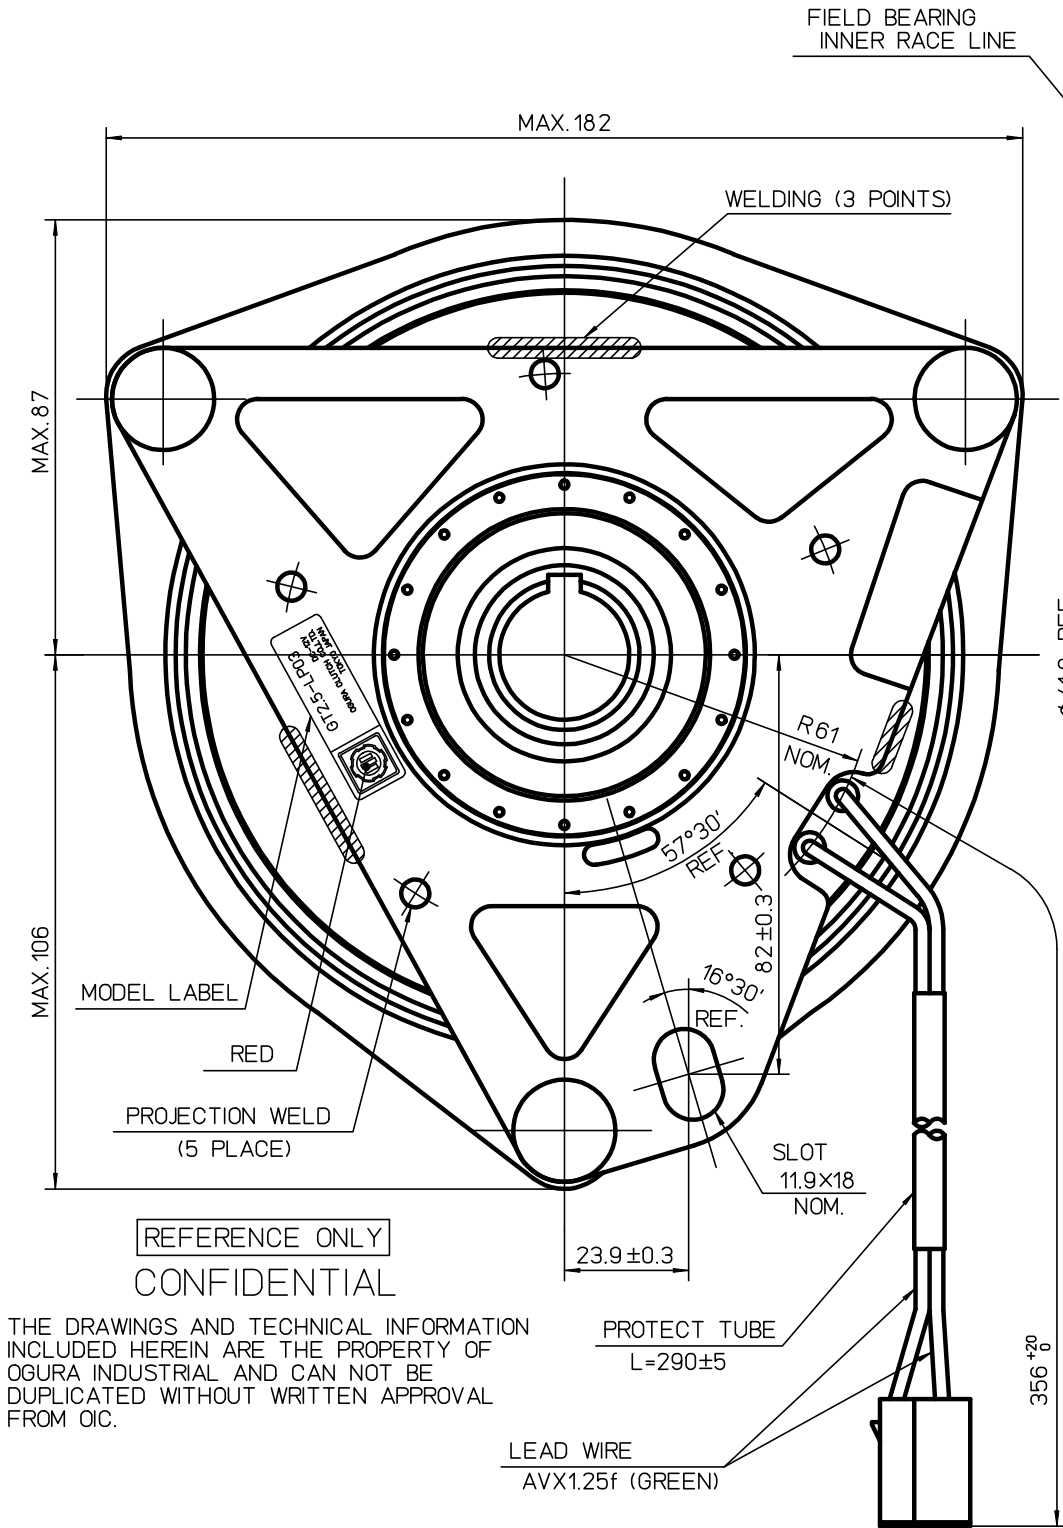


REFERENCE ONLY
CONFIDENTIAL

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.

PACKARD ELECTRIC ("56" SERIES)
2-CONTACT LOCK-TYPE
CONNECTOR : PART No.2973781
TERMINALS : PART No.2965142

	Friction surface
Field rotor assy	Coated
Armature assy	None-coated

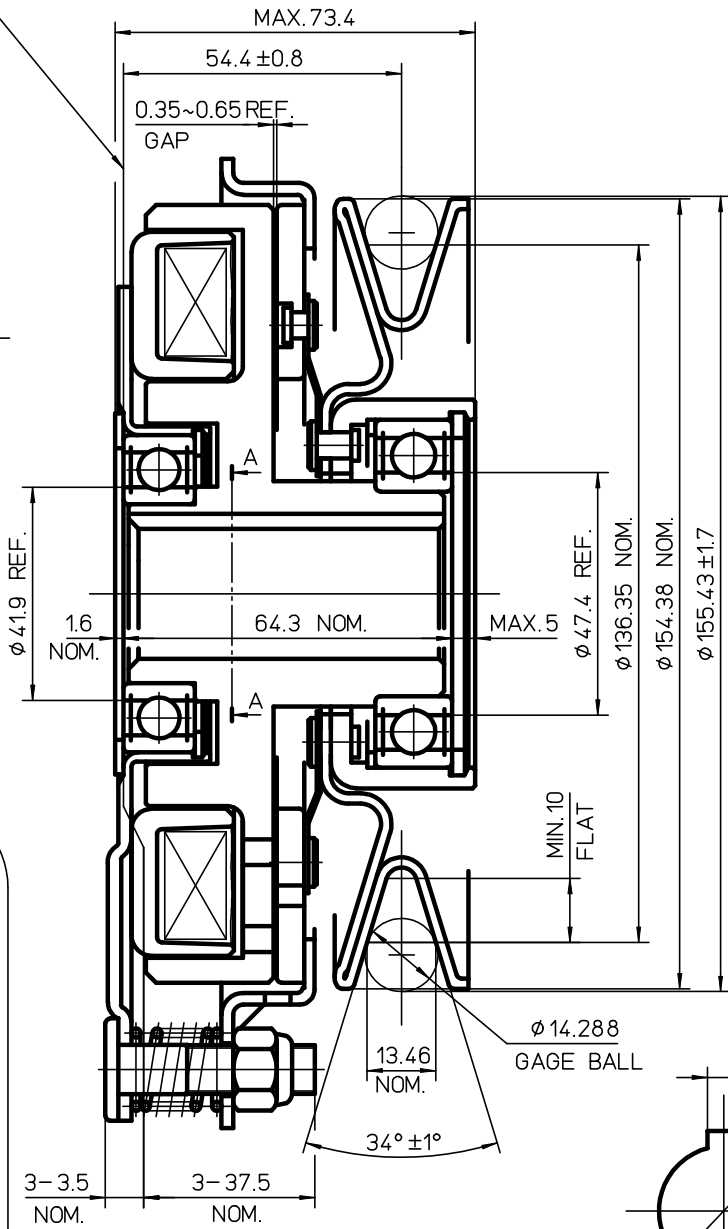

SPECIFICATIONS (at 20°C)

EXCITING VOLTAGE D.C. 12 V

POWER CONSUMPTION MAX. 60 W

STATIC CLUTCH TORQUE

PREBURNISHED MIN. 59 N·m (at OGURA)

FINAL NOMINAL. 203 N·m


STATIC BRAKE TORQUE

INITIAL MIN. 1.7 N·m

FINAL NOMINAL. 4 N·m

MIN PULL IN VOLTAGE D.C. 8.5 V

(COPPER COIL)

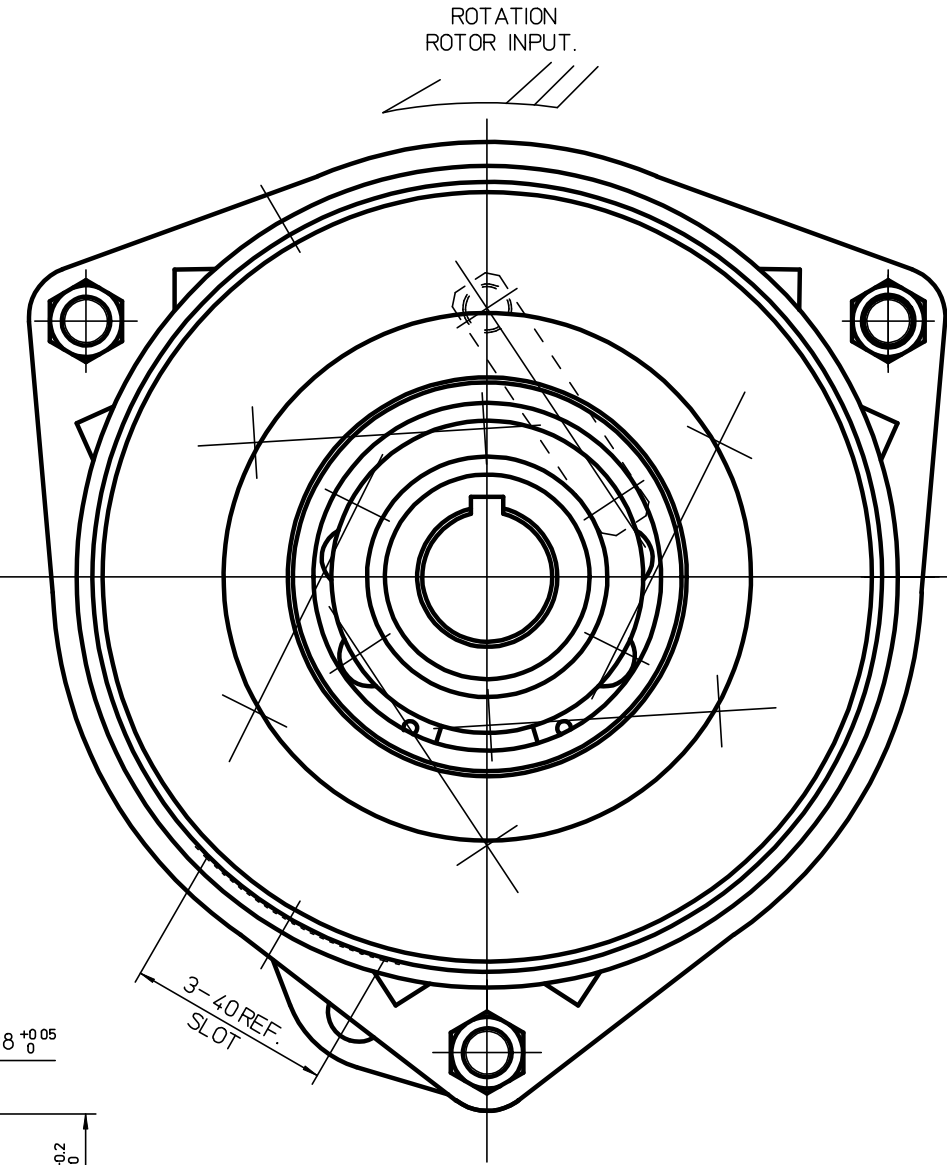

NOTES

- Airgaps must be adjusted when coilsprings and airgap adjustment nuts are incorporated into the clutch/brake at the assembly.
- This clutch model is burnished at the factory before shipment.

*本品はクラッチASSY後にクラッチ慣らし作業を行なうこと。

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY Y. Uemura	DATE JJ.26.2010	SIZE A2
▽ 50S	RANGE 0.5 TO 6 ± 0.1	MATERIAL	CHECKED BY Y. Tamura	DATE JJ.26.2010	SCALE 1/1
▽▽ 25S	6 30 ± 0.2	MATERIAL CODE	DESIGNED BY R. Suzuki	DATE JJ.26.2010	
▽▽▽ 6S	30 120 ± 0.3	MATERIAL SIZE	DRAWN BY S. Tajima	DATE JJ.26.2010	
▽▽▽▽ 3S	120 315 ± 0.5	HEAT TRTMT	CUSTOMER EX		
▽▽▽▽▽ 0.8S	315 1000 ± 0.8	SURFACE TRTMT	MODEL GT2.5-LP03		
HISTORY 53494000	PLANT 2	PARTS CODE 5913100000	ASSY NO		
ISSUE NO		OGURA CLUTCH Co.,LTD.	NAME MAGNETIC CLUTCH & BRAKE		
ISSUE DATE			DWG NO 53494000		