
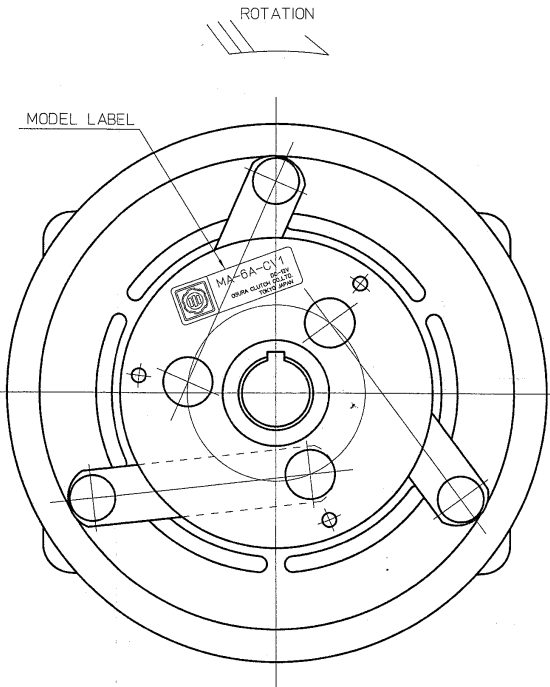
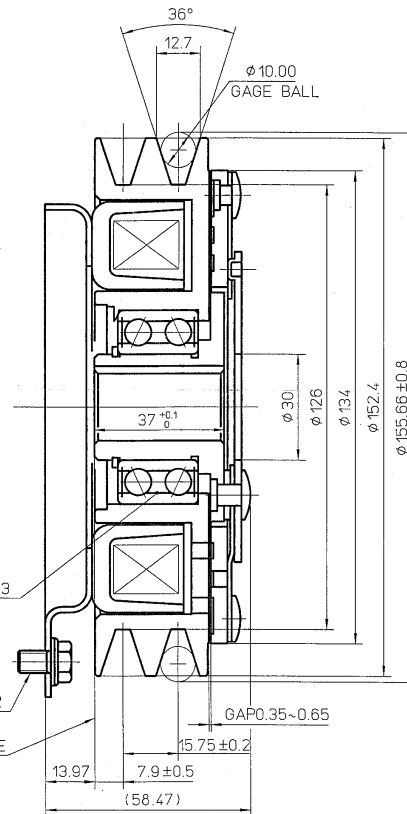


CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIC.

REV	REVISION STATUS	NOTE	DATE	CHK BY	CHK BY
△					
△					
△					

縮小図
量産図

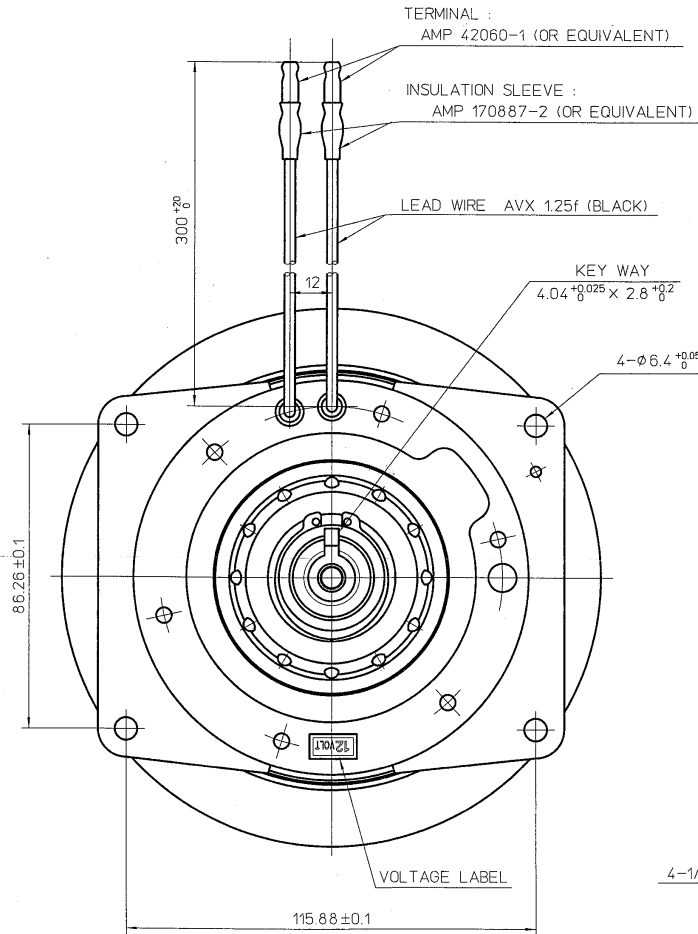


SPECIFICATIONS

1. EXCITING VOLTAGE : D.C. 12 V
2. STATIC TORQUE
INITIAL : 39 N · m
AFTER BURNISHING : 101 N · m
3. POWER CONSUMPTION : MAX. 40 W
4. ROTATION : C.W.

NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- FRICION SURFACE
- RIVET (3MFZn5)
- HUB INNER DIA.
- FIELD CORE COIL ASSY (3MFZn8)



SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY <i>S. Venkatesh</i>	DATE <i>Jan. 22, 2013</i>	SIZE A2
∇ 50S	RANGE 0.5 ~ 6 ± 0.1	TOL.	CHECKED BY <i>S. Venkatesh</i>	DATE <i>Jan. 18, 2013</i>	SCALE 1/1
∇ 25S	6 ~ 30 ± 0.2	MATERIAL	DESIGNED BY <i>H. Nishikawa</i>	DATE <i>Jan. 16, 2013</i>	
∇ 12.5S	30 ~ 120 ± 0.3	MATERIAL CODE	DRAWN BY <i>S. Tajima</i>	DATE <i>Jan. 14, 2013</i>	
∇ 6.3S	120 ~ 315 ± 0.5	MATERIAL SIZE	CUSTOMER		
∇ 3.15S	315 ~ 1000 ± 0.8	HEAT TRTM	MODEL		
		0	MA-6A-CV1		
			ASSY NO		
HISTORY	ISSUE NO	FLANT	NAME		
53615200	2	2	MAGNETIC CLUTCH		
ISSUE DATE	2013. 1. 24	PARTS CODE	DWG NO		
		5913100000	53615200		
		OGURA CLUTCH Co., LTD.			