


CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIC.

REV	REVISION STATUS	NOTE	DATE	CHK	BY
△					
△					
△					




縮小図
量産図

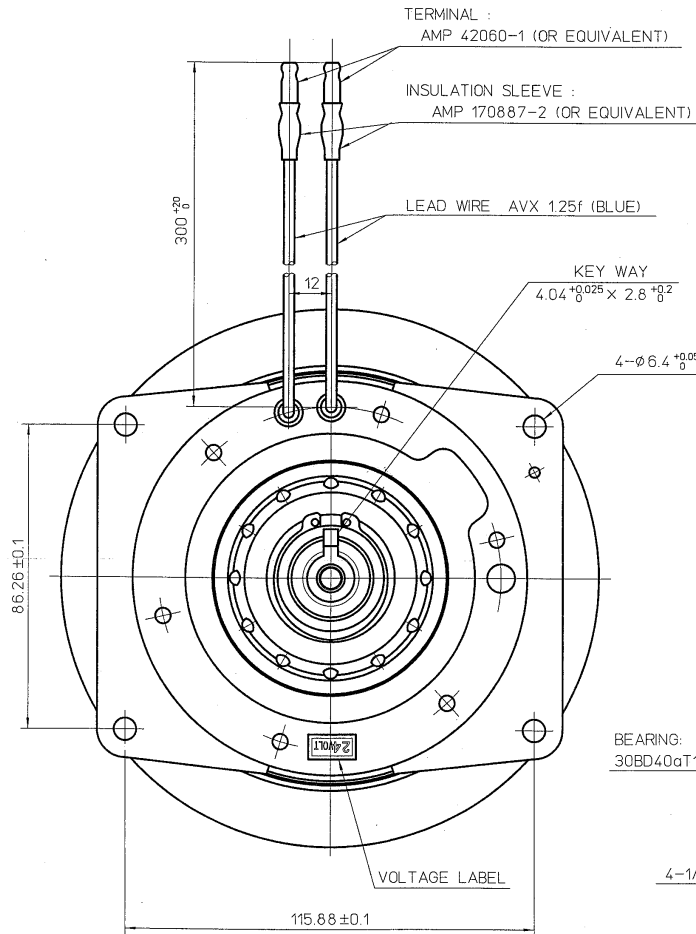

BEARING:
30BD40gT12DDF2CG21SBNRL

4-1/4-20UNC-2Bx9.2

HUB FACE LINE

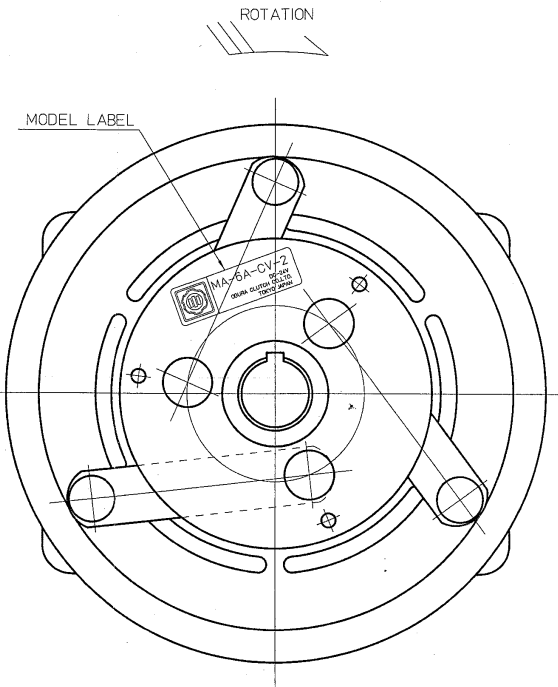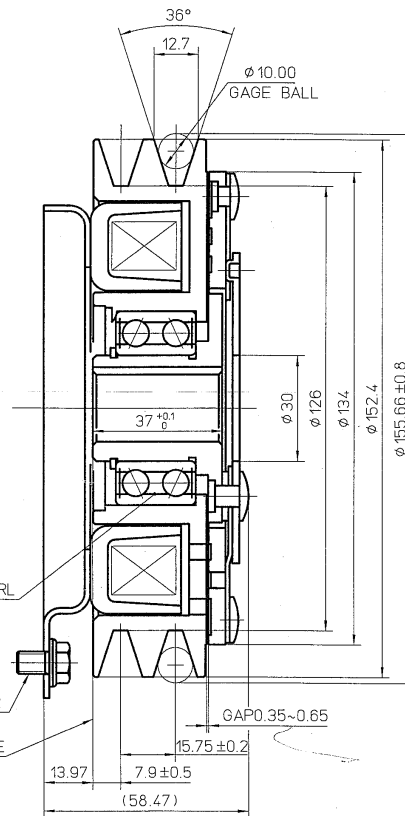

SPECIFICATIONS

1. EXCITING VOLTAGE : D.C. 24 V
2. STATIC TORQUE
INITIAL : 39 N·m (4.0 kgfm)
AFTER BURNISHING : 101 N·m (10 kgfm)
3. POWER CONSUMPTION : MAX. 30.3 W
4. ROTATION : C.W.

NOTES

- SURFACE TREATMENT :
- BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
- EXCEPT FOLLOWING PARTS
- FRICTION SURFACE
- RIVET (3MFZn5)
- HUB INNER DIA.
- FIELD CORE COIL ASSY (3MFZn8)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 4	WORKING PROCESS	APPROVED BY <i>Y. Uemura</i> DATE <i>Jan. 22, 2013</i> SIZE A2
RANGE	TOL.	MATERIAL	CHECKED BY <i>S. Onda</i> DATE <i>Jan. 18, 2013</i> SCALE 1/1
▽ 50S	0.5 0.6 ± 0.1	MATERIAL	DESIGNED BY <i>H. Yoshikawa</i> DATE <i>Jan. 16, 2013</i>
▽ 25S	6 30 ± 0.2	MATERIAL	DRAWN BY <i>S. Tajima</i> DATE <i>Jan. 14, 2013</i>
▽ 12.5	30 120 ± 0.3	MATERIAL	CUSTOMER EX
▽ 6.3	120 315 ± 0.5	MATERIAL	MODEL MA-6A-CV-2
▽ 3.15	315 1000 ± 0.8	HEAT TRTM	ASSY NO
HISTORY	53615300	SURFACE TRTM	NAME MAGNETIC CLUTCH
ISSUE NO	PLANT 2	PARTS CODE 5913200000	DWG NO 53615300
ISSUE DATE 2013. 1. 24	OGURA CLUTCH Co., LTD.		