


CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIC.

REV	REVISION STATUS	NOTE	DATE	CHK BY
△				
△				



縮小図
量産図

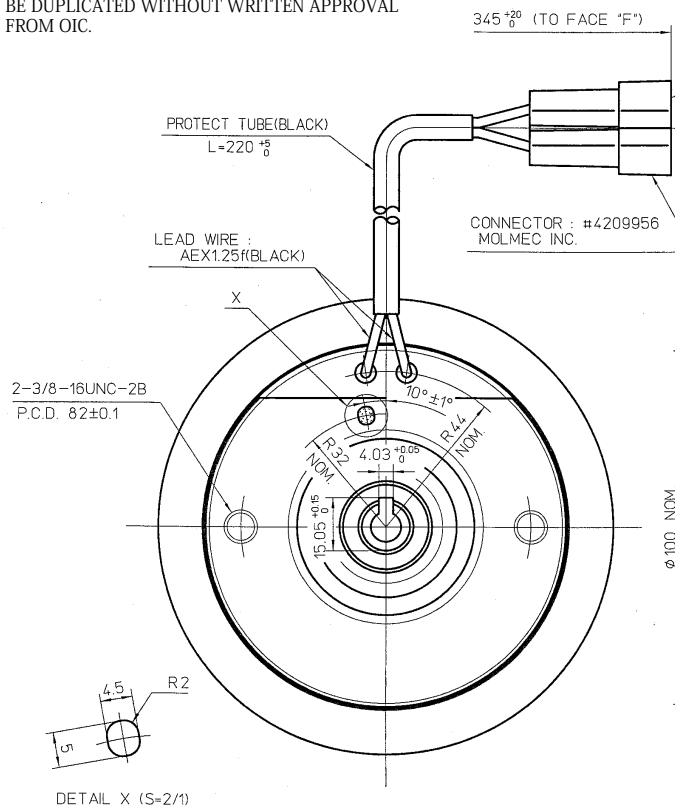

TERMINALS : #381425-FL02
UNITED TECHNOLOGIES AUTOMOTIVE
TERMINAL PRODUCTS

OR

TERMINAL : LCM-1425-2
INTERLOCK TERMINAL CORPORATION

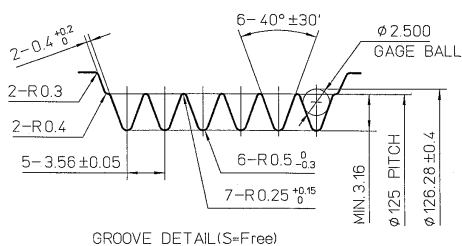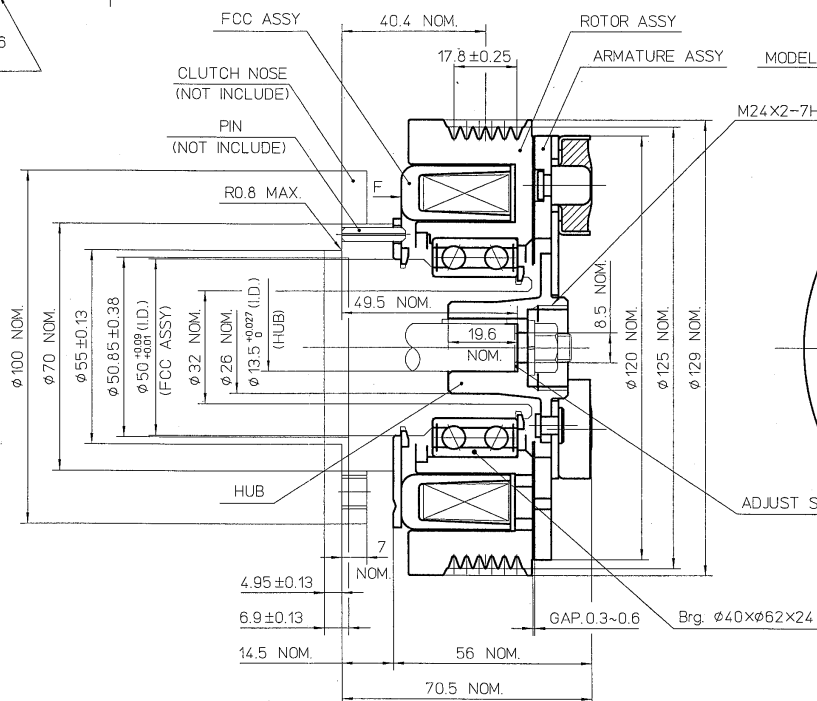

SPECIFICATIONS (at 20°C)

1. EXCITING VOLTAGE : D.C.12 V
2. BELT : PLY "V" 6K TYPE
3. STATIC TORQUE
INITIAL : 35 N·m
AFTER BURNISHING : 49 N·m
4. POWER CONSUMPTION : MAX.45 W (at 20°C)
5. ROTATION : C.W & C.C.W

WARNER ELECTRIC P/N 1417-24

DEWEZE

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS	WORKING PROCESS	APPROVED BY	DATE	SIZE
▽ 50S	RANGE 0.5 6 ± 0.1		Y. Deming	Mar. 20, 2013	A2
▽ 25S	6 30 ± 0.2		Y. Deming	Mar. 17, 2013	SCALE 1
▽ 12.5	30 120 ± 0.3		Y. Deming	Mar. 17, 2013	
▽ 6.3	120 315 ± 0.5		Y. Deming	Mar. 17, 2013	
▽ 3.15	315 1000 ± 0.8		Y. Deming	Mar. 17, 2013	
HISTORY	53629400				
ISSUE NO	PLANT	PARTS CODE	NAME		
2	2	5913100000	MAGNETIC CLUTCH		
ISSUE DATE	2013. 3. 20	OGURA CLUTCH Co.,LTD.	53629400		