


GROOVE DETAILS (S=Free)


CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIC.

ROTATION
PULLEY INPUT

縮小図
量産図

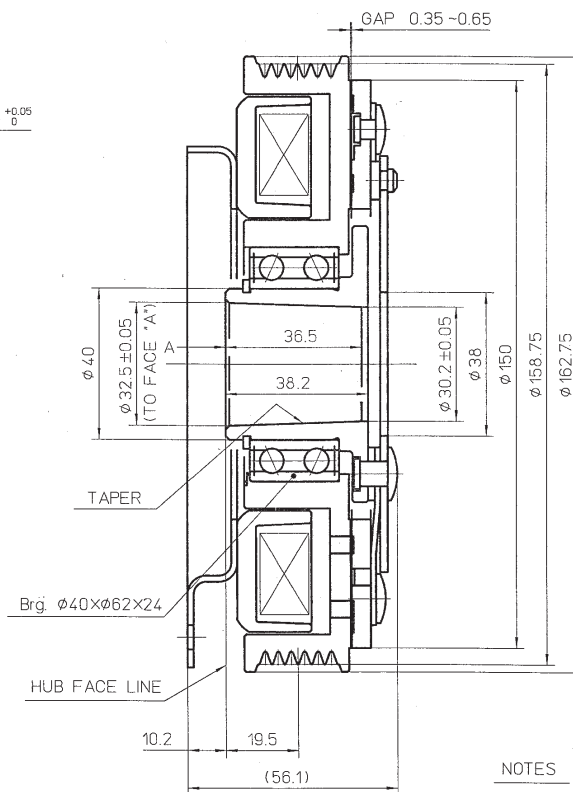

MODEL LABEL

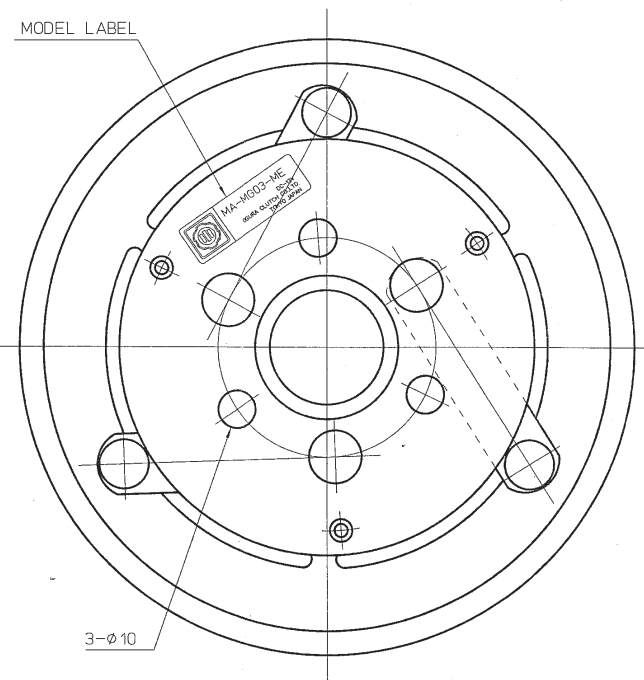

NOTES

1. TORQUE VALUES ARE REFERENCE ONLY.

SPECIFICATIONS (at 20°C)

1. EXCITING VOLTAGE : D.C.12 V
2. BELT : PLY "V" 6K TYPE
3. STATIC TORQUE
STATIC : 39 Nm
FINAL NOMINAL : 101 Nm
4. POWER CONSUMPTION : MAX.47 W
5. ROTATION : C.W.
(COPPER COIL)

Friction surface

Rotor assy	None-coated
Armature assy	None-coated

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY <i>S. Oshino</i>	DATE Jan. 11 2013	SIZE A2
$\nabla 50S$	RANGE TOL.	MATERIAL	CHECKED BY <i>M. K. T.</i>	DATE Jun. 6 2013	SCALE 1/1
$\nabla 25S$	OVER 0.5 0.6 ± 0.1	MATERIAL	DESIGNED BY <i>M. MIYAZAWA</i>	DATE Jun. 6 2013	
$\nabla 6S$	6 30 ± 0.2	MATERIAL	DRAWN BY <i>C. Oshino</i>	DATE Jun. 07 2013	
$\nabla 3S$	30 120 ± 0.3	MATERIAL	CUSTOMER EX		
$\nabla 0.8S$	120 315 ± 0.5	SIZE	MODEL MA-MG03-ME		
	315 1000 ± 0.8	HEAT TRTM	ASSY NO		
HISTORY	53644000	SURFACE TRTM	NAME MAGNETIC CLUTCH		
ISSUE NO	PLANT	PARTS CODE	DWG NO		
2013. 6. 13	2	5913100000	53644000		1
		OGURA CLUTCH Co.,LTD.			