
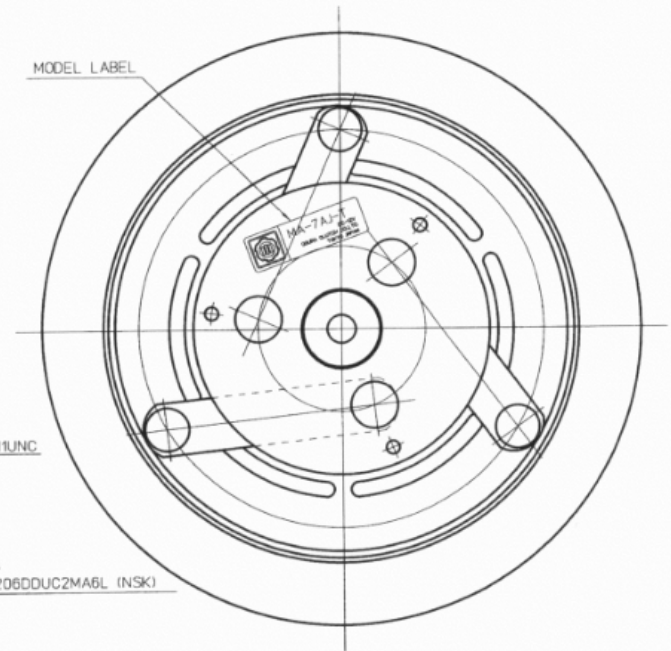
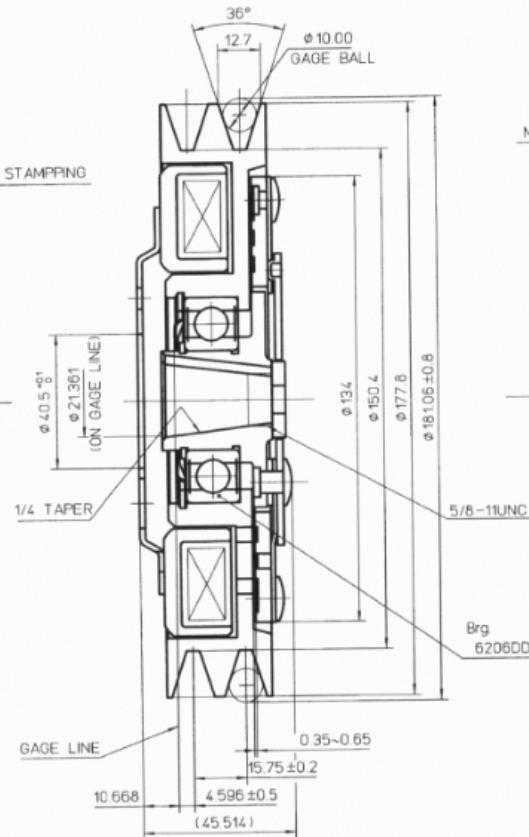


CUSTOMER SIGNATURE FOR DESING APPROVAL

OIC. A. Ameng

REV	REVISION STATUS	NOTE	DATE	CHK BY/CHK BY
△				
△				
△				

DELIVERY SPECIFICATION
Apr. 07. 2017
OGURA CLUTCH CO., LTD.

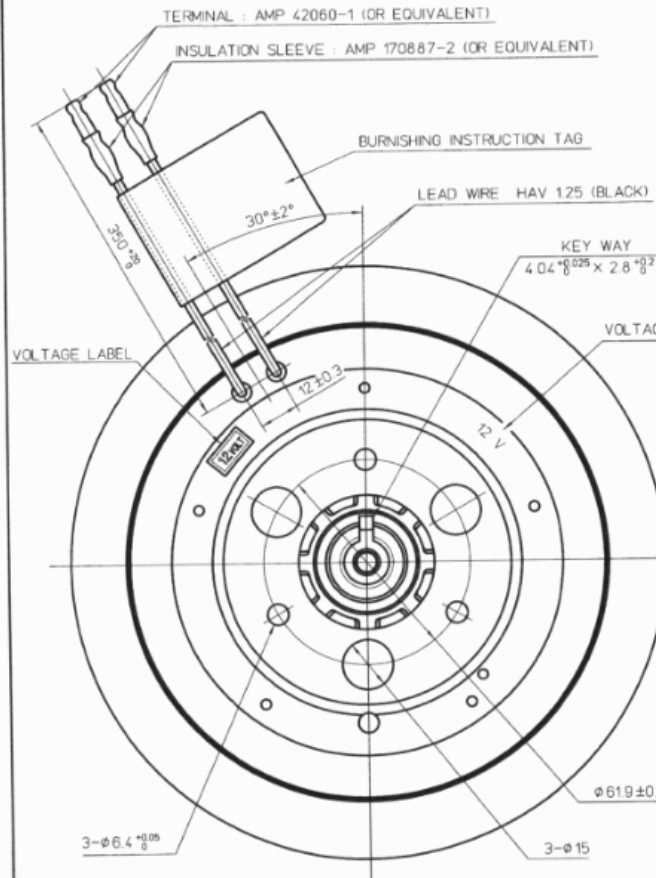

SPECIFICATIONS

1. EXCITING VOLTAGE : D.C. 12 V
2. STATIC TORQUE
INITIAL : 39 N·m (4.0 kgfm)
AFTER BURNISHING : 101 N·m (10 kgfm)
3. POWER CONSUMPTION : MAX. 433 W
4. ROTATION : C.W.
5. WEIGHT :

NOTES

- SURFACE TREATMENT :
BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
- FRICTION SURFACE
RIVET (MFZn2-B)
HUB INNER DIA.
FIELD CORE COIL ASSY (MFZn3)

CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL CORP AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS	MORNING PROCESS	APPROVED BY <i>Y. Kuma</i> DATE <i>Apr. 07. 2017</i> SIZE <i>A2</i>
V 50S	RANGE TOL. OVER 0.5 0.1 ± 0.1	MATERIAL	CHECKED BY <i>R. I. YL</i> DATE <i>Apr. 06. 2017</i> SCALE <i>1/1</i>
VV 25S	6 10 ± 0.2	MATERIAL	DESIGNED BY <i>Y. Aino</i> DATE <i>Apr. 05. 2017</i>
VVV 6S	30 120 ± 0.3	MATERIAL	DRAWN BY <i>(S) Shingo</i> DATE <i>Apr. 05. 2017</i>
VVVV 3S	120 315 ± 0.5	MATERIAL	CUSTOMER <i>MERMAID MARINE PRODUCTS</i>
VVVVV 0.8S	315 1000 ± 0.5	HEAT TREAT	MODEL <i>MA-7AJ-T</i>
HISTORY	53829400	SURFACE TREAT	ASSY NO
ISSUE NO	PLANT 2	PARTS CODE	NAME <i>MAGNETIC CLUTCH</i>
ISSUE DATE		OGURA CLUTCH Co., LTD.	53829400