
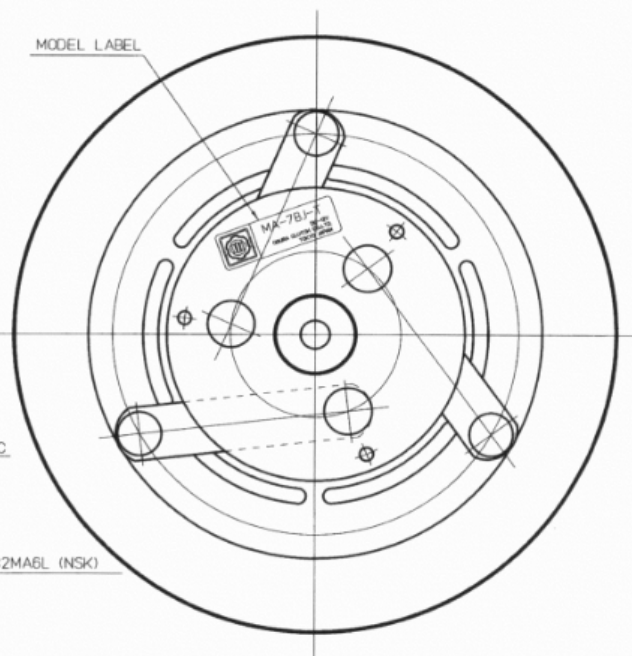
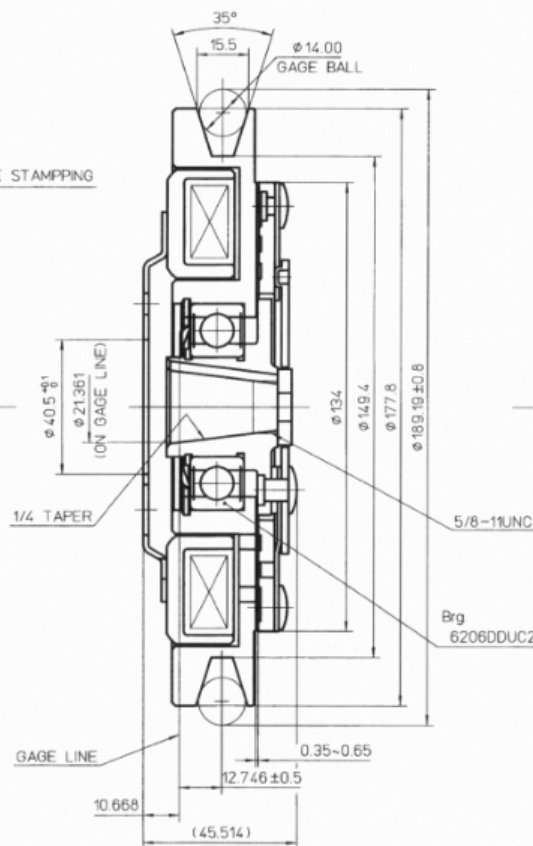


CUSTOMER SIGNATURE FOR DESING APPROVAL

OIC. A. Amanga

REV	REVISION STATUS	NOTE	DATE	DWG BROK BY
△				
△				

DELIVERY SPECIFICATION
Mar. 02. 2017
OGURA CLUTCH CO., LTD

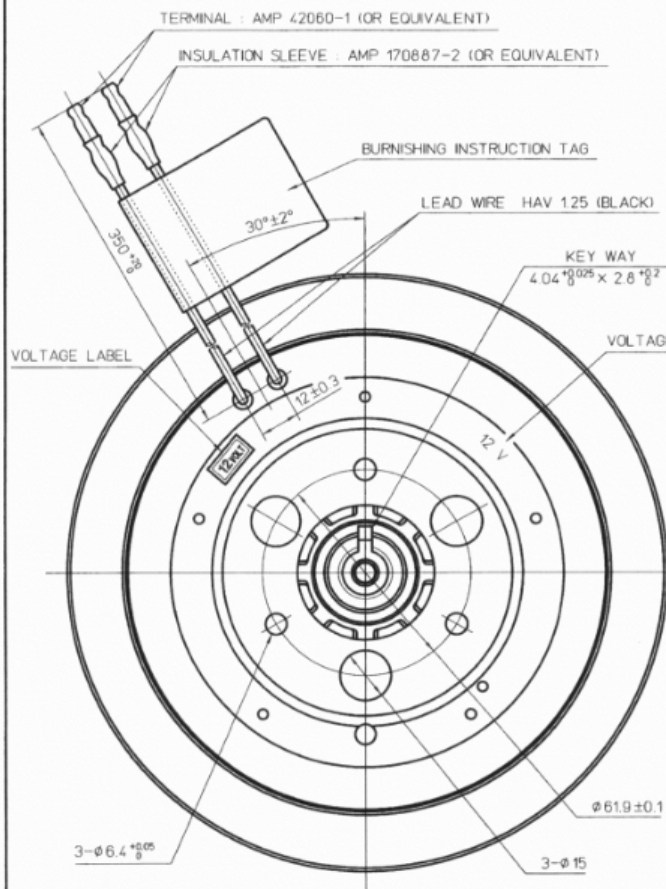

SPECIFICATIONS

1. EXCITING VOLTAGE : D.C.12 V
2. STATIC TORQUE
INITIAL : 39 N·m (4.0 kgfm)
AFTER BURNISHING : 101 N·m (10 kgfm)
3. POWER CONSUMPTION : MAX.43.3 W
4. ROTATION : C.W.
5. WEIGHT :

NOTES

- SURFACE TREATMENT :
BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
FRICTION SURFACE
RIVET (MFZn2-B)
HUB INNER DIA.
FIELD CORE COIL ASSY (MFZn3)

CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL CORP AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS N	WORKING PROCESS	APPROVED BY K. Kuroki	DATE Apr. 27, 2017	SIZE A2
▽ 1.6/3.2	RANGE TOL.	MATERIAL	CHECKED BY K. I. Y.	DATE Apr. 27, 2017	SCALE 1/1
100/255	6/10 ± 0.1	MATERIAL	DESIGNED BY T. Arai	DATE Apr. 27, 2017	
100/63	30/120 ± 0.2	MATERIAL	DRAWN BY O. Shindou	DATE Apr. 27, 2017	
100/32	100/315 ± 0.5	MATERIAL	CUSTOMER MERMAID MARINE PRODUCTS		
100/0.63	315/1000 ± 0.8	HEAT TREAT	MODEL MA-7BJ-T		
HISTORY 53829500	PLANT 2	DATE 0	ASSY NO.		
ISSUE NO.	PARTS CODE	5913100000	NAME MAGNETIC CLUTCH		
ISSUE DATE	OGURA CLUTCH Co., LTD.	53829500			