

CUSTOMER SIGNATURE FOR DESIGN APPROVAL





K. Katayama

REV	REVISION STATUS	NOTE	DATE	CHG BY	CHK BY
01	9	CHANGED HUB SURFACE TREATMENT, etc.	(2)	1	Immediately

DELIVERY SPECIFICATION

Jan. 27. 2020

OGURA CLUTCH CO.,LTD

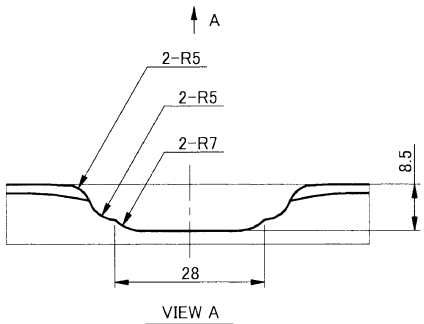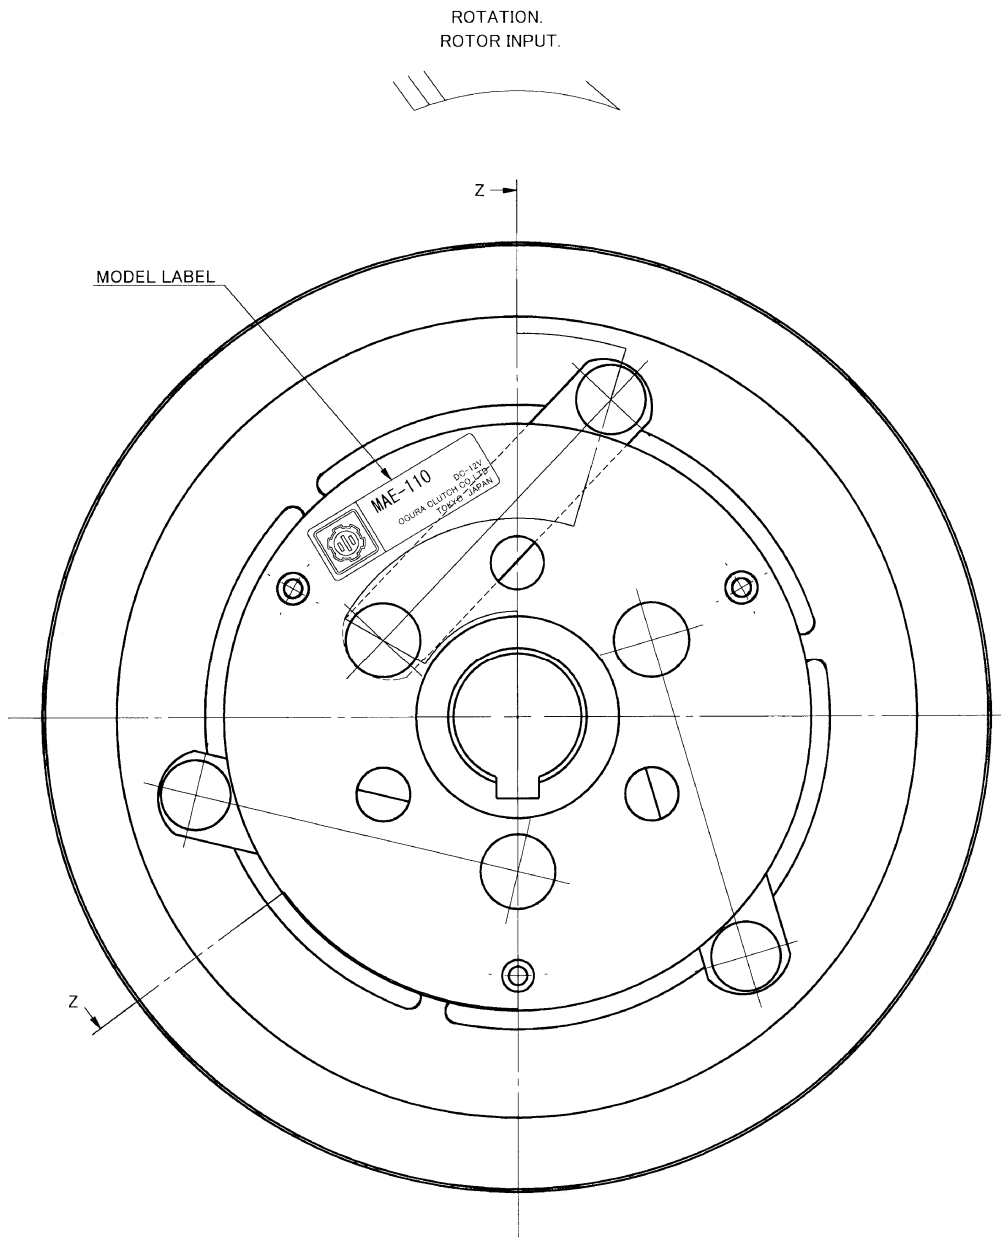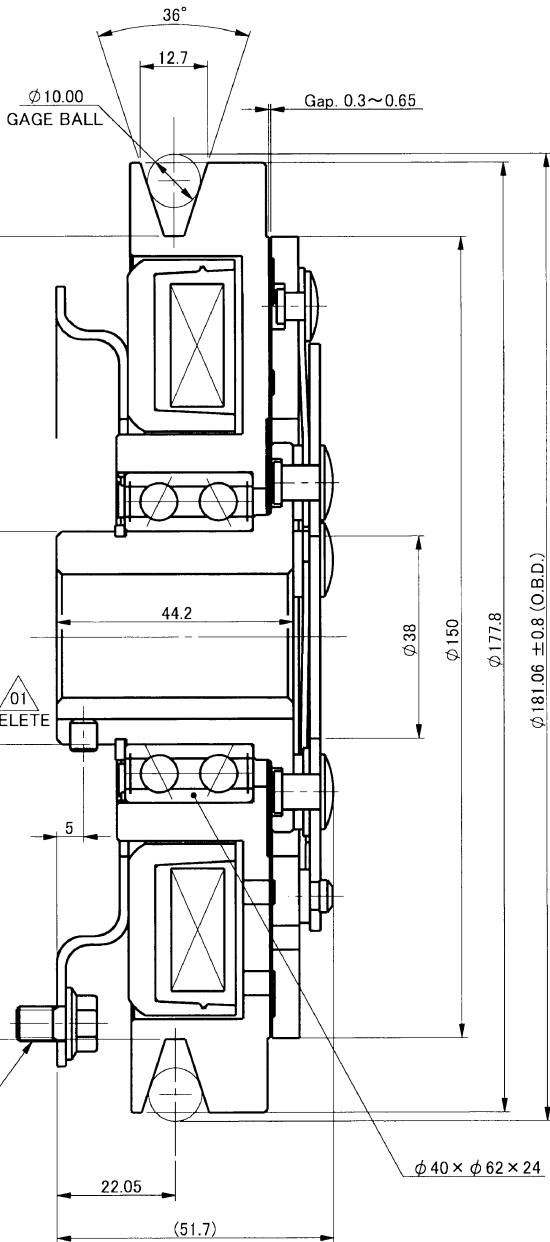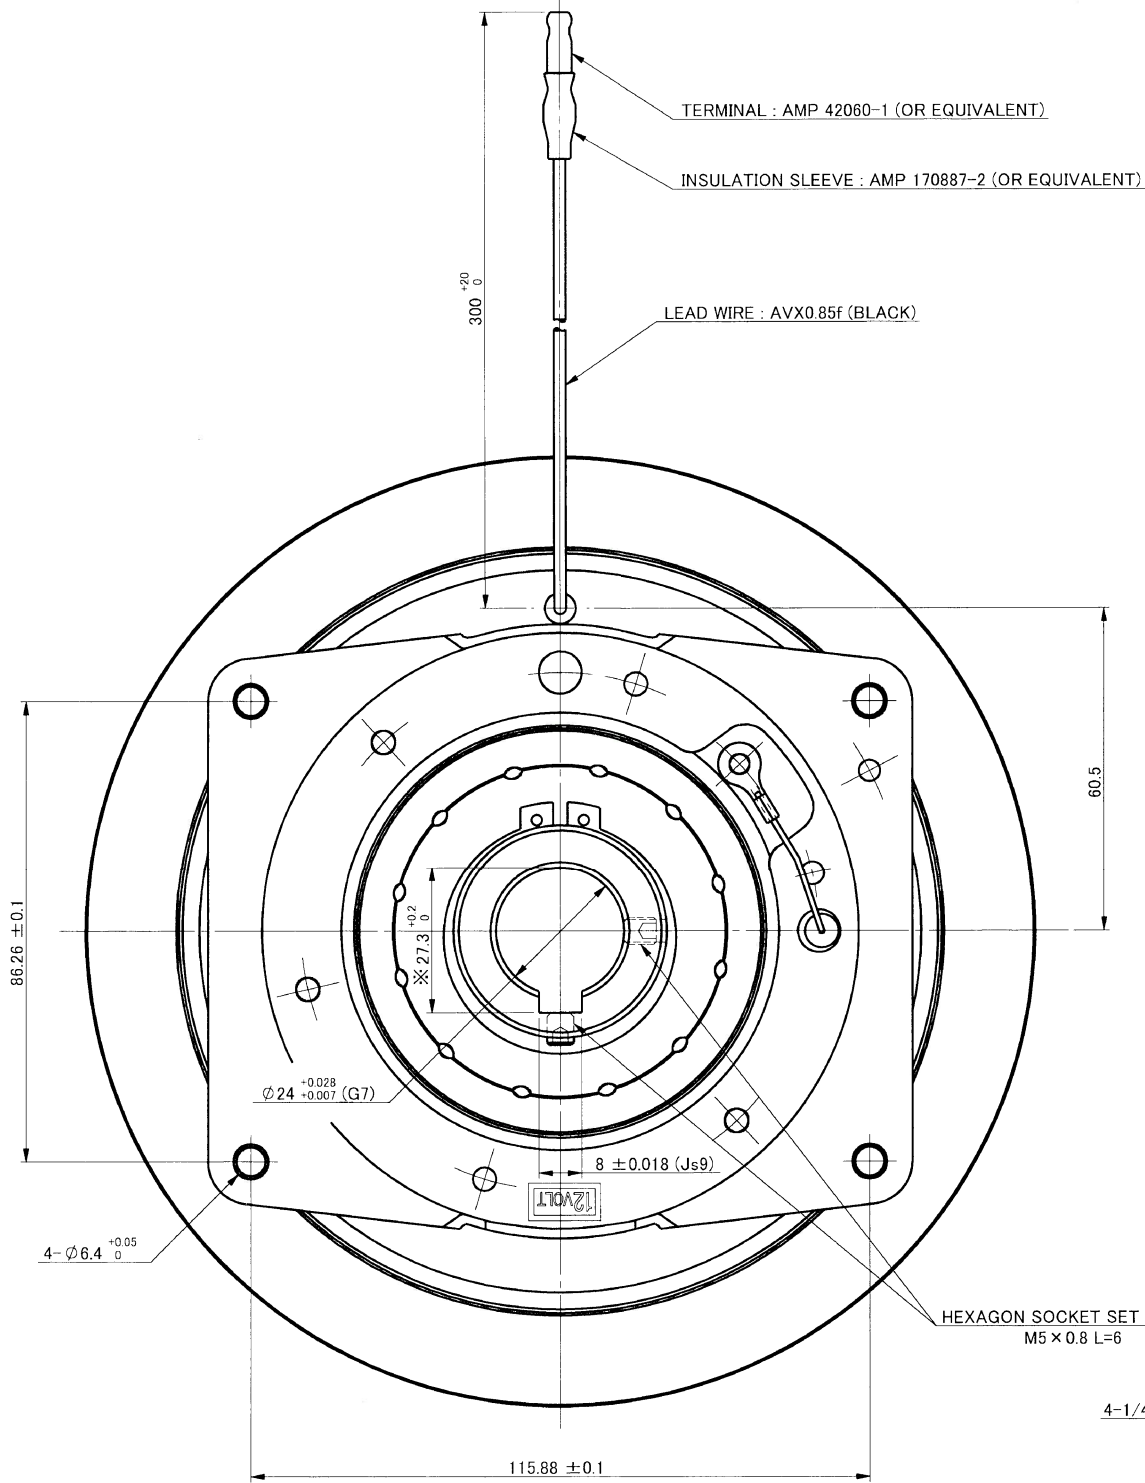

01 NOTES

- SURFACE TREATMENT :
BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
FRICTION SURFACE
RIVET (3MFZn5)
HUB (3MFZn8) HUB INNER DIA. (NONE COATED)
FIELD CORE COIL ASSY (3MFZn8)

- SPECIFICATIONS (at 20°C)
- EXCITING VOLTAGE : D.C. 12 V
 - STATIC TORQUE
INITIAL : 39 N·m
AFTER BURNISHING : 101 N·m
 - POWER CONSUMPTION : MAX. 47 W
 - ROTATION : C.W.

	FRICTION SURFACE
ROTOR ASSY	NONE - COATED
ARMATURE ASSY	NONE - COATED

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR CLASS 14	WORKING PROCESS	APPROVED BY Y.Kurosu	DATE Jan.17.2020	SIZE A2
▽ 50S	RANGE 0.5 TO 0.1	TOL. ± 0.1	CHECKED BY R.Iijima	DATE Jan.17.2020	SCALE
▽ 25S	6 TO 30	± 0.2	DESIGNED BY Y.Arai	DATE Jan.17.2020	1:1
▽ 12.5S	30 TO 120	± 0.3	DRAWN BY E.Ooshima	DATE Jan.16.2020	
▽ 6.3S	20 TO 315	± 0.5	CUSTOMER EX		
▽ 3.15S	315 TO 1000	± 0.8	MODEL MAE-110		
▽ 0.8S			ASSY NO		
HISTORY 53950800△ 01			NAME MAGNETIC CLUTCH		
ISSUE NO	PLANT 2	PARTS CODE 5913100000	DWG NO 53950800		
ISSUE DATE		OGURA CLUTCH Co.,LTD.			

CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL CORP AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OIC.