
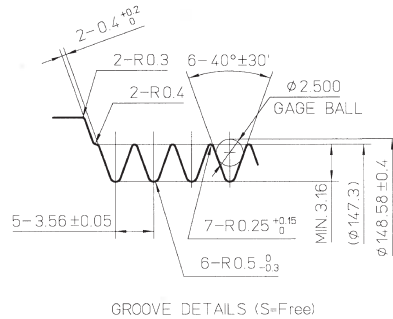
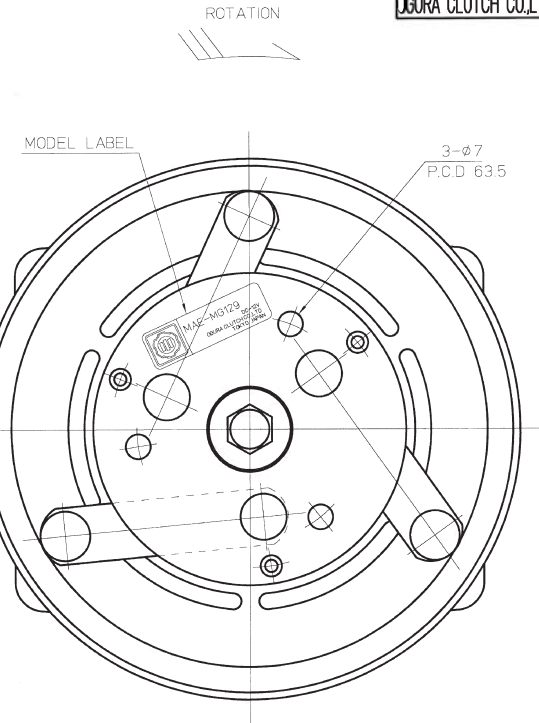
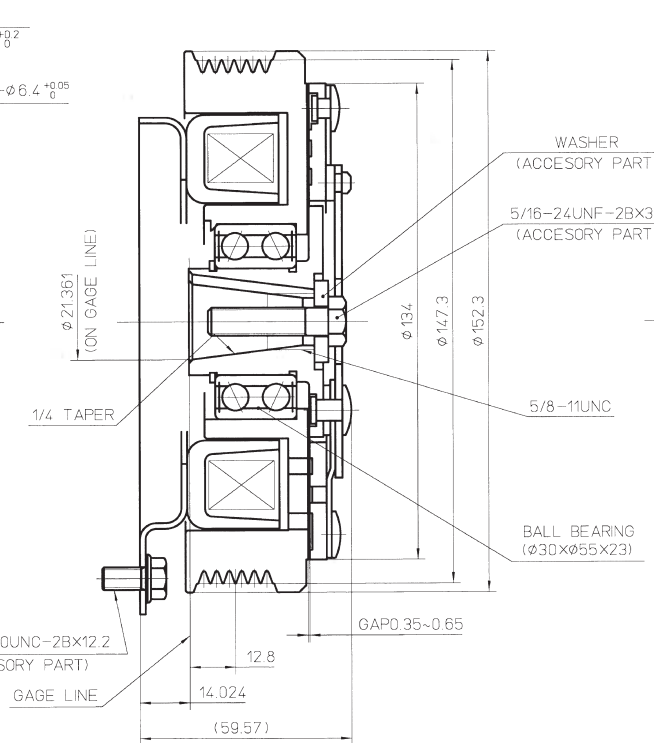


CUSTOMER SIGNATURE FOR DESIGN APPROVAL

| REV | REVISION STATUS | NOTE | DATE | CHK BY | CHK BY |
|-----|-----------------|------|------|--------|--------|
| △   |                 |      |      |        |        |
| △   |                 |      |      |        |        |

**DELIVERY SPECIFICATION**  
**Oct. 23, 2020**  
**OGURA CLUTCH CO., LTD.**

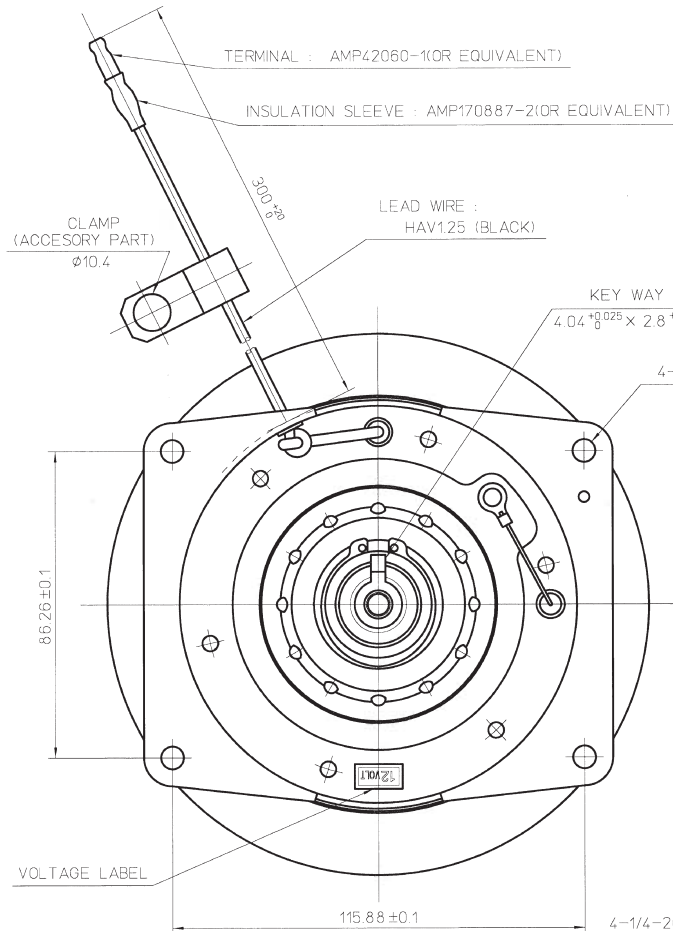

#### SPECIFICATIONS (at 20°C)

1. EXCITING VOLTAGE : D.C.12 V
2. BELT : PLY \*V\* 6K TYPE
3. STATIC TORQUE  
 INITIAL : 75 Nm  
 AFTER BURNISHING : 102 Nm
4. POWER CONSUMPTION : MAX.47 W
5. ROTATION : C.W.

(COPPER COIL)

#### NOTES

1. SURFACE TREATMENT :  
 BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)  
 EXCEPT FOLLOWING PARTS
1. FRICTION SURFACE
2. RIVET (3MFZn5)
3. HUB INNER DIA.
4. FIELD CORE COIL ASSY (3MFZn8)

CONFIDENTIAL  
 THE DRAWINGS AND TECHNICAL INFORMATION  
 INCLUDED HEREIN ARE THE PROPERTY OF  
 OGURA INDUSTRIAL CORP AND CAN NOT  
 BE DUPLICATED WITHOUT WRITTEN APPROVAL  
 FROM OIC.

|                                                          |                                     |                           |                                                    |            |
|----------------------------------------------------------|-------------------------------------|---------------------------|----------------------------------------------------|------------|
| SURFACE<br>ROUGHNESS<br>UNLESS<br>OTHERWISE<br>SPECIFIED | GENERAL<br>TOLERANCE<br>FOR CLASS 2 | WORKING PROCESS           | APPROVED BY: <i>[Signature]</i> DATE: Oct 20, 2020 | SIZE: A2   |
| RANGE                                                    | TOL.                                | MATERIAL                  | CHECKED BY: <i>[Signature]</i> DATE: Oct 21, 2020  | SCALE: 1/1 |
| 50S                                                      | OVER 0.5                            | 0.15 ± 0.1                | DESIGNED BY: <i>[Signature]</i> DATE: Oct 21, 2020 |            |
| 25S                                                      | 6                                   | 30 ± 0.2                  | DRAWN BY: <i>[Signature]</i> DATE: Oct 19, 2020    |            |
| 15S                                                      | 30                                  | 120 ± 0.3                 | CUSTOMER: EX                                       |            |
| 10S                                                      | 120                                 | 315 ± 0.5                 | MODEL: MAE-MQ129                                   |            |
| 0.8S                                                     | 315                                 | 1000 ± 0.8                | ASSY NO:                                           |            |
| HISTORY: 53980800                                        | SURFACE<br>TREATMENT                | 0                         | NAME: MAGNETIC CLUTCH                              |            |
| ISSUE NO:                                                | PLANT: 2                            | PARTS<br>CODE: 5913100000 | DWG NO:                                            |            |
| ISSUE DATE:                                              | OGURA CLUTCH Co., LTD.              |                           | 53980800                                           |            |