


REV	REVISION RECORD	NOTE
1	USE LOCTITE ON THE BEARINGS.	(1) 2

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI.

3/8-16UNC THD PROVIDED FOR FAILSAFE BOLTS 2-PLCS (9/16 MAX LENGTH)

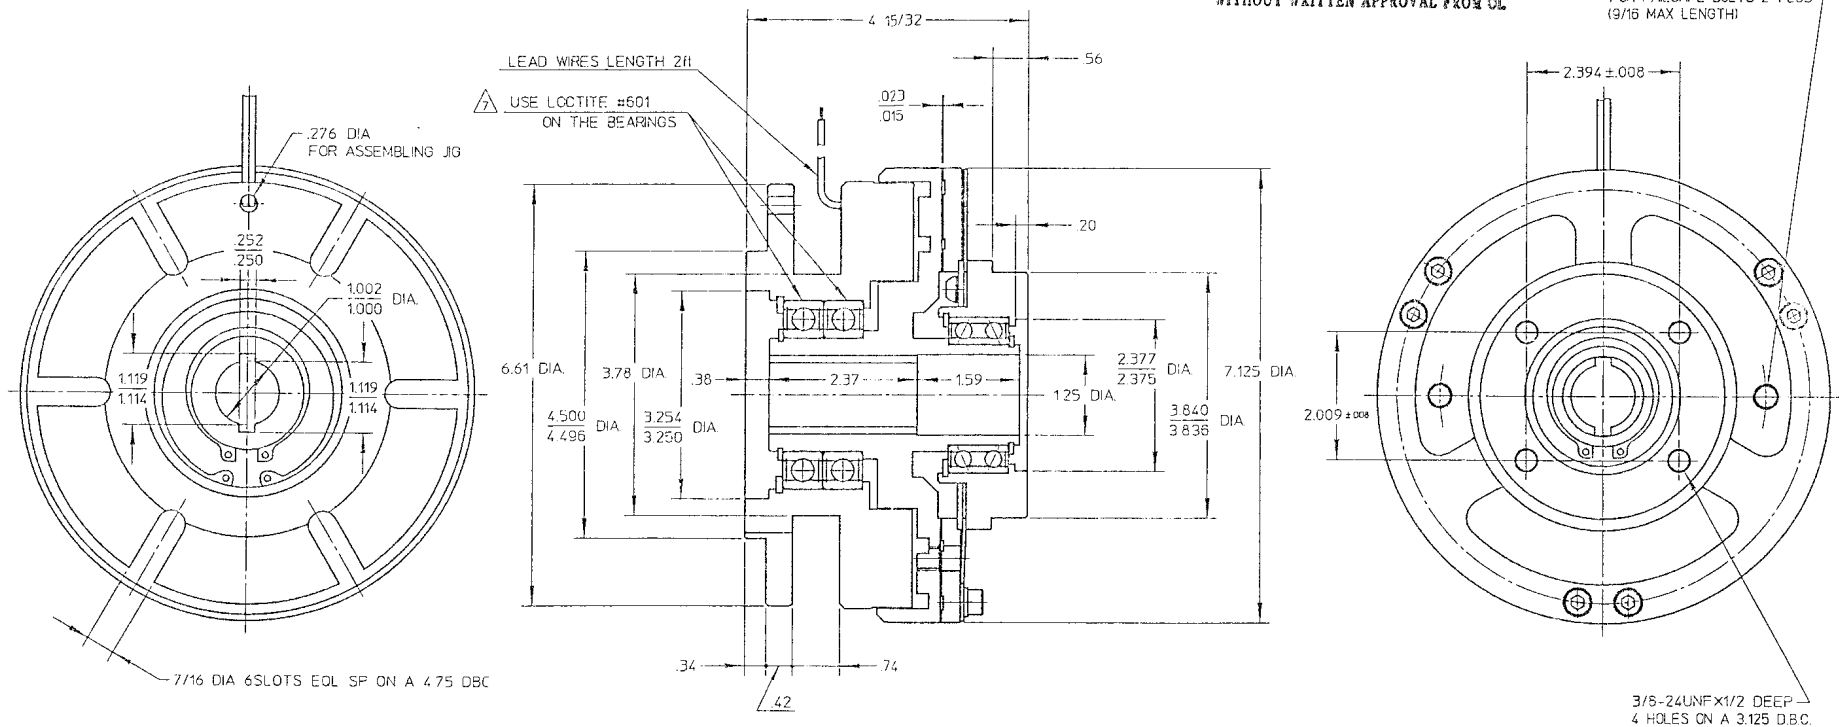

SPECIFICATION

STATIC TORQUE	200 lbf
STANDARD VOLTAGE - DC	12 V
POWER CONSUMPTION	66 W
PROTECTIVE ELEMENT	TNR23G121K or TNR20V121K

HISTORY	APPROVED A. Tadomura	DATE Jun. 26, 2001	SIZE A3	CUSTOMER
80001706 REWRITE	CHKD Y. Yokoyama	DATE Jun. 26, 2001	SCALE 1/2	MODEL MMC 28E-01
	CHKD S. Nakajima	DATE Jun. 26, '01		ASSY NO
	DWN K. Akimune	DATE Jun. 22, 2001		
ISSUE NO	PLANT 1	PARTS CODE 1113855700	NAME ELECTROMAGNETIC CLUTCH	
ISSUE DATE Cl. 8. 26		OGURA CLUTCH Co., LTD.	DWG NO 800 017 06	SHT. /