
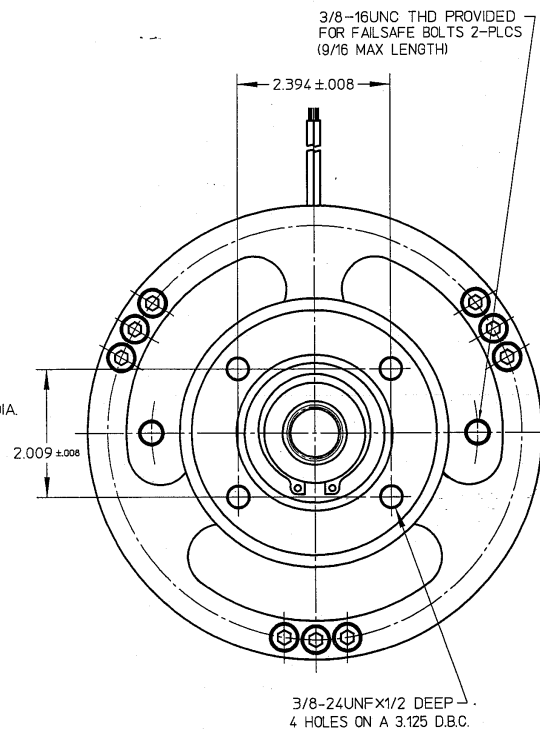


REV	REVISION RECORD	NOTE
5	2 CHANGE OF DIMENSION	(1) 2 NEXT LOT

THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED
WITHOUT WRITTEN APPROVAL FROM OL

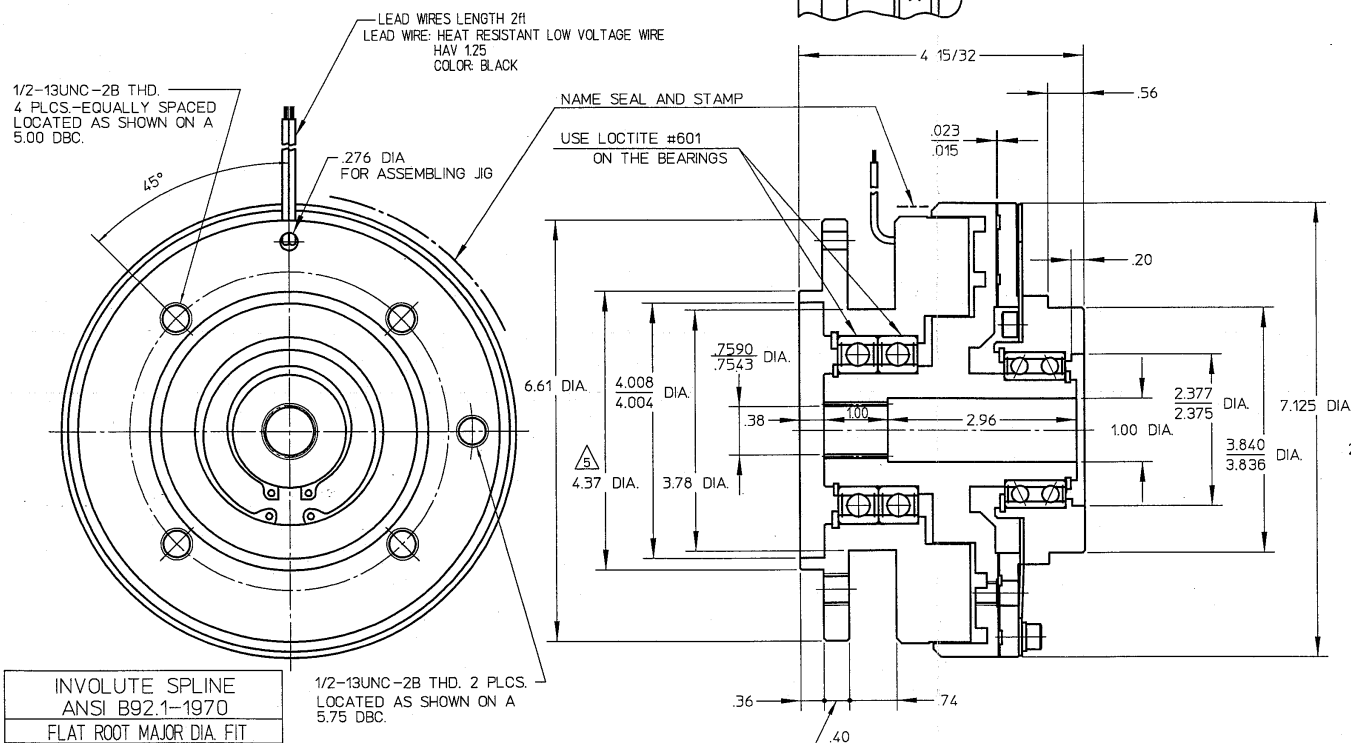

INVOLUTE SPLINE ANSI B92.1-1970	
FLAT ROOT MAJOR DIA. FIT	
NUMBER OF TEETH	13
PITCH	16/32
PRESSURE ANGLE	30°
PITCH CIRCLE DIA.	.8125
BASE CIRCLE DIA.	.7036
MAJOR DIA.	.8750 ^{+0.012} ₀
MINOR DIA.	.7543 ^{+0.047} ₀
TOOTH THICKNESS	.0981 ^{+0.0093} ₀
OVER PIN DIA.	.6533 ^{+0.111} ₀
PIN DIA.	.1063
TOLERANCE CLASS	7

ACCESSORY
SURGE ABSORBER X1

SPECIFICATION	
STATIC TORQUE	200 lb · ft
STANDARD VOLTAGE - DC	12 V
POWER CONSUMPTION	66 W
SURGE ABSORBER	TNR20V121K

HISTORY	APPROVED	DATE	SIZE	CUSTOMER
	CHKD	DATE	SCALE	
	CHKD	DATE	SCALE	
	DWN	DATE	SCALE	
80003931	M. Toriba	Mar. 08 '07	A3	MODEL MMC 28E-05
REWRITE	T. Nakajima	Mar. 08 '07	1/2	
ISSUE NO	A. Ishikawa	Mar. 06 2007		
ISSUE DATE	PLANT	PARTS CODE		
07. 3. 9	1	1113855700		NAME ELECTROMAGNETIC CLUTCH
		OGURA CLUTCH Co.,LTD.		DWG NO 800 039 31
				SHT. /

