


REV	REVISION RECORD	NOTE
△		

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OI

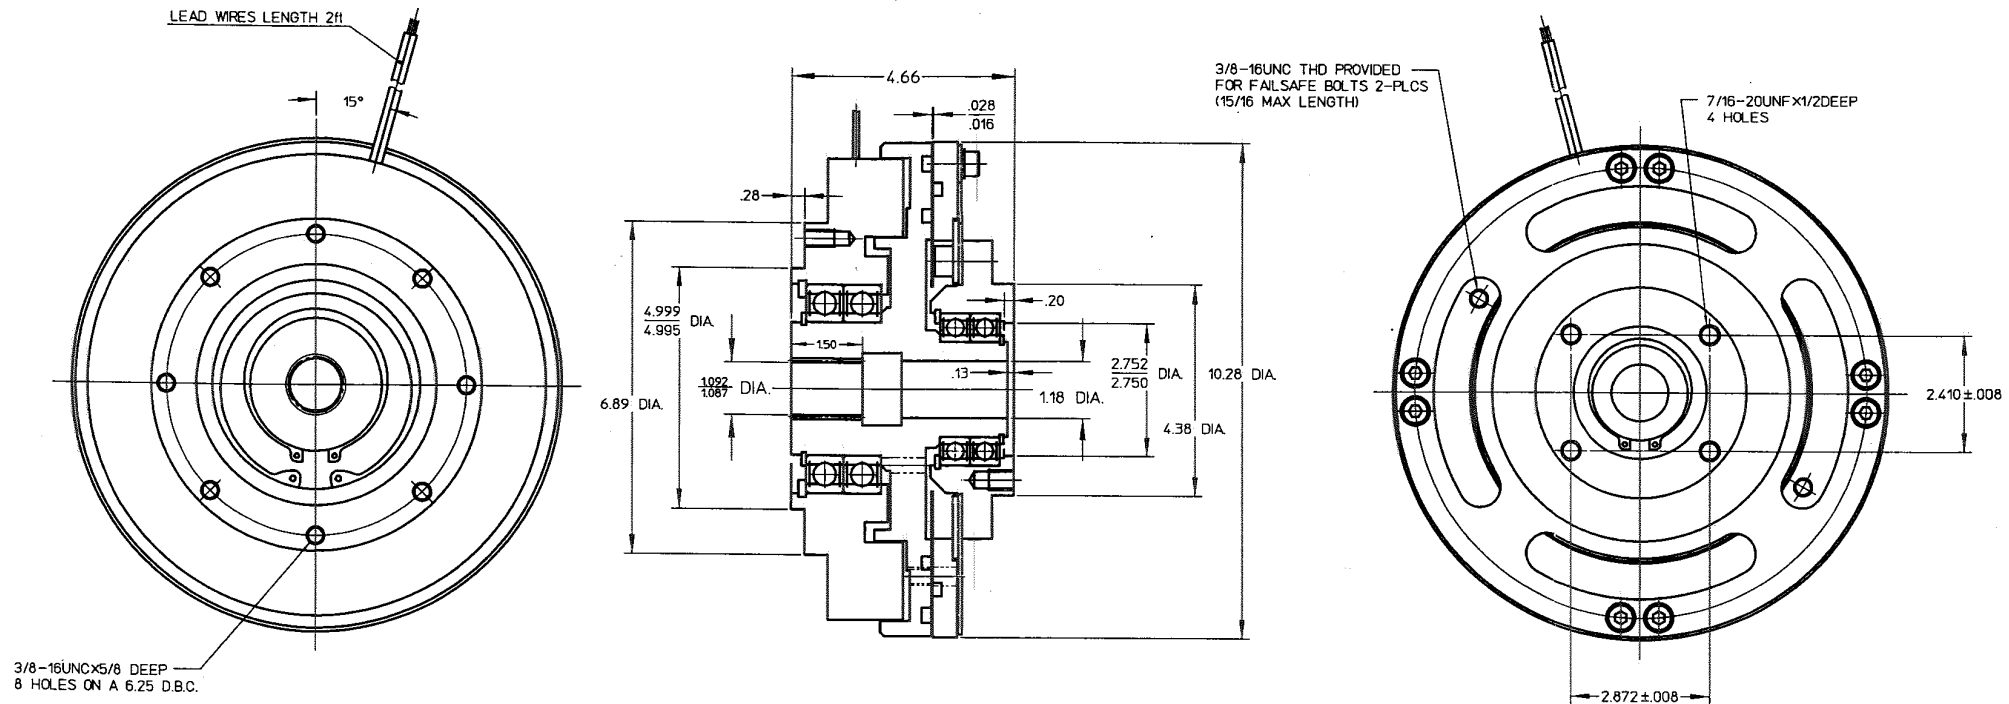

INVOLUTE SPLINE ANSI B92.1-1970	
FLAT ROOT MAJOR DIA FIT	
NUMBER OF TEETH	14
PITCH	12/24
PRESSURE ANGLE	30°
PITCH CIRCLE DIA	1.1666
BASE CIRCLE DIA	1.0103
MAJOR DIA	1.250 ^{+0.004} / ₀
MINOR DIA	1.087 ^{+0.005} / ₀
TOOTH THICKNESS (TRUE)	.1313 ^{+0.0025} / ₀
TOOTH THICKNESS (EFFECTIVE)	.1309 ^{+0.0025} / ₀
OVER PIN DIA	.9636 ^{+0.0051} / ₀
PIN DIA	.1417
TOLERANCE CLASS	7

SPECIFICATION	
STATIC TORQUE	400 lbft
STANDARD VOLTAGE - DC	12 V
POWER CONSUMPTION	68 W
PROTECTIVE ELEMENT	TNR20V121K

ACCESSORY
PROTECTIVE ELEMENT X1

HISTORY	APPROVED Tadenuma DATE Sep 13, 2005	SIZE A2	CUSTOMER
42931580 △	CHCKD M. Tachibana DATE Sep 13, 2005	SCALE 1/2	MODEL MMC 60E-02
ISSUE NO	PLANT 1	PARTS CODE 1113856300	ASSY NO
ISSUE DATE '05 9.14	DWG NO OGURA CLUTCH Co., LTD.	NAME ELECTROMAGNETIC CLUTCH	SHIT. /