


CONFIDENTIAL
THE DRAWINGS AND TECHNICAL INFORMATION
INCLUDED HEREIN ARE THE PROPERTY OF
OGURA INDUSTRIAL CORP AND CAN NOT
BE DUPLICATED WITHOUT WRITTEN APPROVAL
FROM OIG.

REV	REVISION RECORD	NOTE
1	ADDITION OF STAMP, POSTSCRIPT OF LEAD WIRE NUMBER (3)	2 NEXT LOT

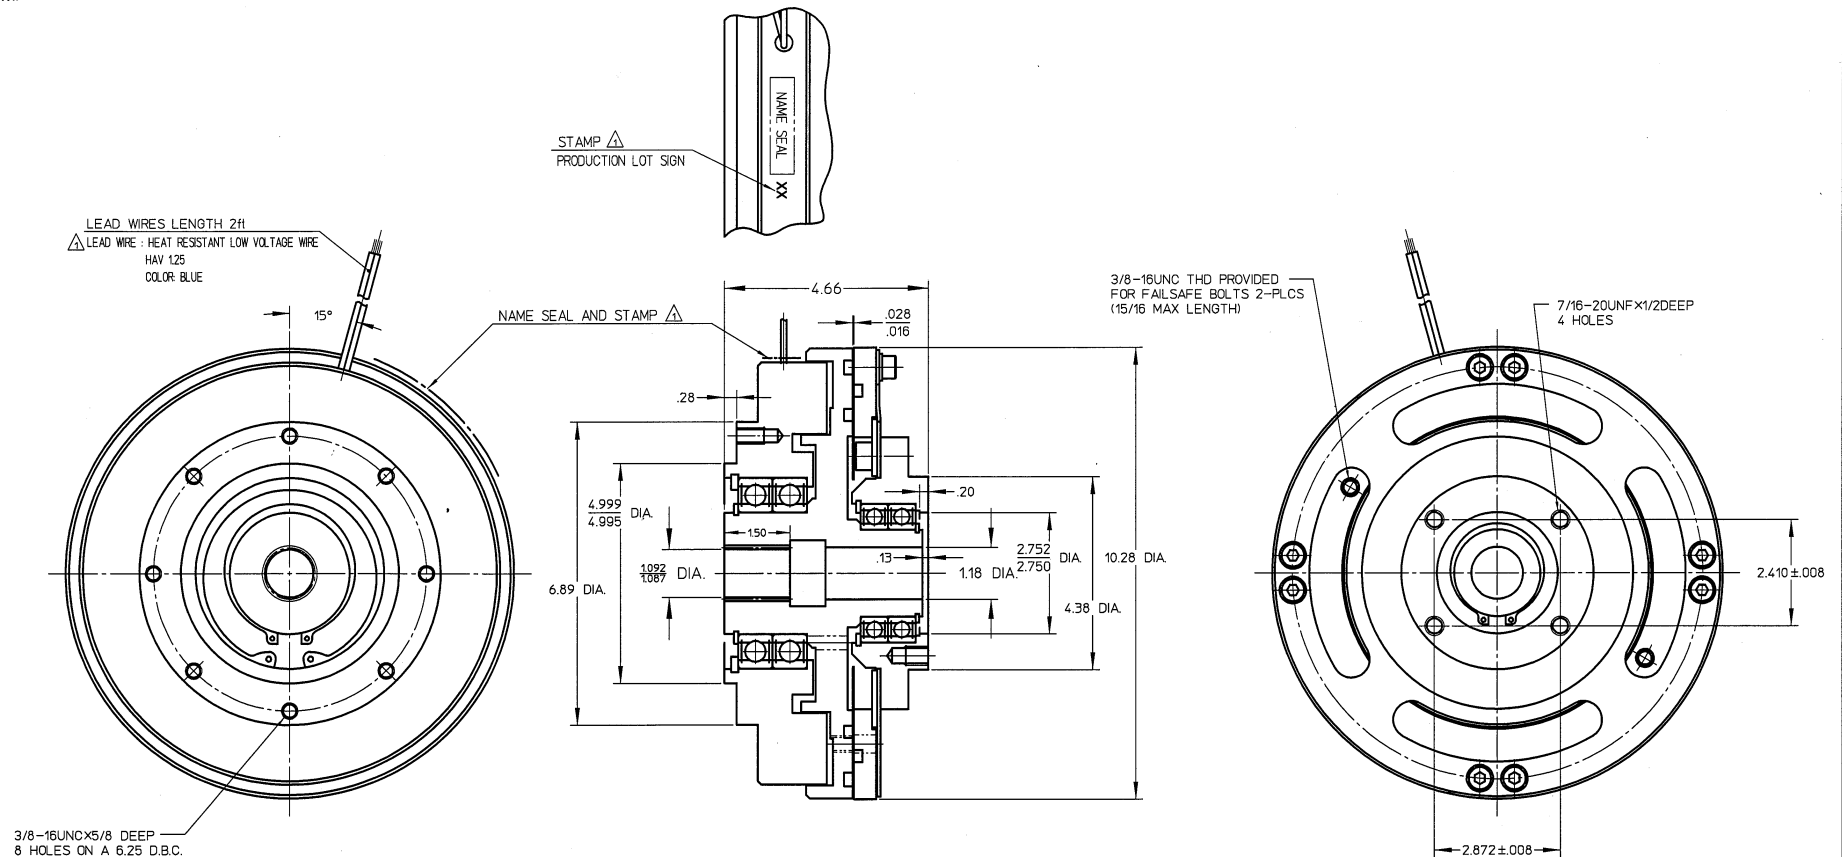

INVOLUTE SPLINE	
ANSI B92.1-1970	
FLAT ROOT MAJOR DIA FIT	
NUMBER OF TEETH	14
PITCH	12/24
PRESSURE ANGLE	30°
PITCH CIRCLE DIA	1.1666
BASE CIRCLE DIA	1.0103
MAJOR DIA	1.250 ^{+0.014} / _{-0.005}
MINOR DIA	1.087 ^{+0.005} / _{-0.0025}
TOOTH THICKNESS (TRUE)	.1313 ^{+0.0025} / _{-0.0025}
TOOTH THICKNESS (EFFECTIVE)	.1309 ^{+0.0025} / _{-0.0025}
OVER PIN DIA	.9636 ^{+0.0051} / _{-0.0025}
PIN DIA	.1417
TOLERANCE CLASS	7

SPECIFICATION	
STATIC TORQUE	400 ¹ / ₂ lbf
STANDARD VOLTAGE - DC	24 ¹ / ₂ V
POWER CONSUMPTION	68 ¹ / ₂ W
SURGE ABSORBER	TNR20V121K

ACCESSORY
 SURGE ABSORBER X1



HISTORY	APPROVED CHKD 80004459 REWRITE	DATE 15.6.07 14.9.07 16.4.07	SIZE A2 SCALE 1/2	CUSTOMER MODEL MMC 60G-02 ASSY NO
ISSUE NO	PLANT 1	PARTS CODE 1113856300	NAME ELECTROMAGNETIC CLUTCH	
ISSUE DATE		OGURA CLUTCH Co.LTD.	DWG NO 800 044 59	SHT. 1