


REV	REVISION RECORD	NOTE

THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OL

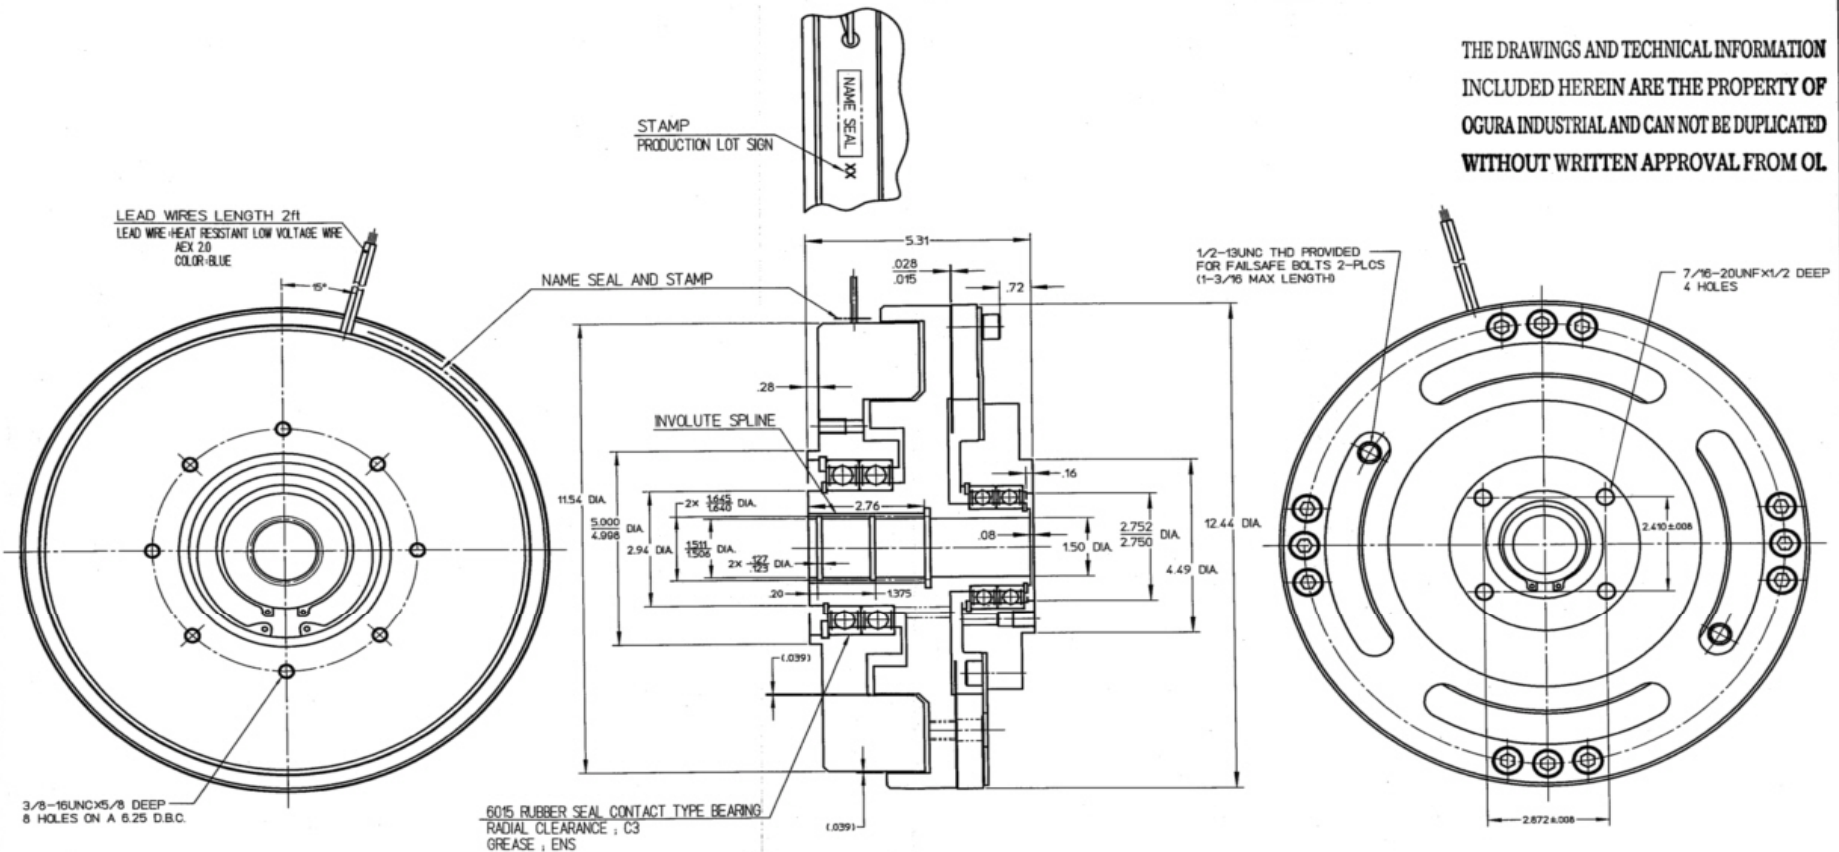

INVOLUTE SPLINE
ANSI B92.1

FLAT ROOT SIDE FIT	
PITCH	8/16
PRESSURE ANGLE	30°
NUMBER OF TEETH	13
PITCH CIRCLE DIA	1.6250
BASE CIRCLE DIA	1.4073
MAJOR DIA	1.7803
MINOR DIA	1.5063 ^{1.004}
OVER PIN DIA	1.2985 ^{1.004}
PIN DIA	2.160

SPECIFICATION

STATIC TORQUE	1000 lb ft (AFTER BURNISHING)
STANDARD VOLTAGE - DC	24 V
POWER CONSUMPTION	100 W
SURGE SUPPRESSION RESISTOR	50 Ω (50W)

ACCESSORY
SURGE SUPPRESSION RESISTOR X1



HISTORY	APPROVED	DATE	SIZE	CUSTOMER
	42938536	Jan 29/10	A2	
ISSUE NO	PLANT	DATE	SCALE	MODEL
	1	Jan 29/10	1/2	
ISSUE	PARTS	DATE	NAME	ASSY NO
	1	Jan 27/2010	A. Ishikawa	
10.1.29		OGURA CLUTCH Co.LTD.		800 051 59