




DIMENSIONS IN : INCHES

REV	REVISION RECORD	NOTE


THE DRAWINGS AND TECHNICAL INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF OGURA INDUSTRIAL AND CAN NOT BE DUPLICATED WITHOUT WRITTEN APPROVAL FROM OL

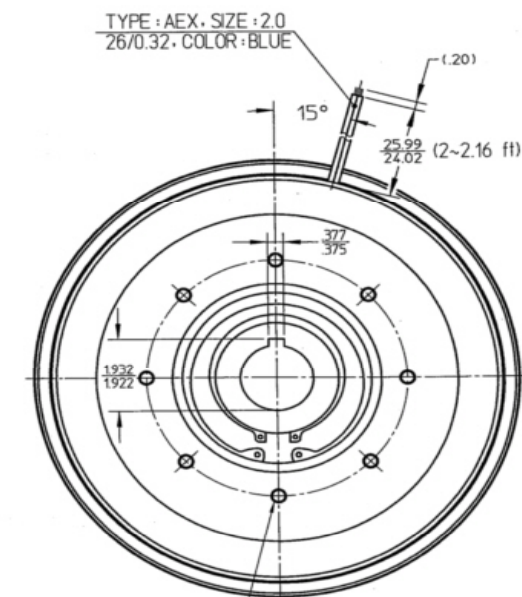

3/8-16UNCx5/8 DEEP
8 HOLES ON A 6.25 D.B.C.

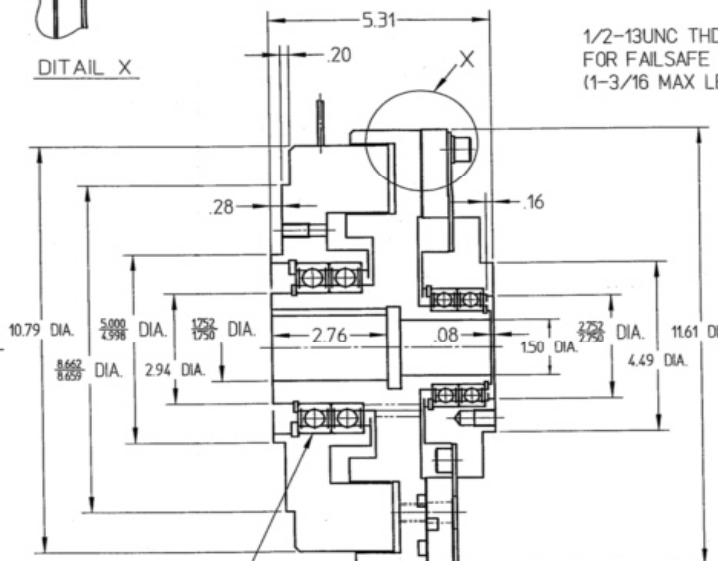

6015 RUBBER SEAL CONTACT TYPE BEARING
RADIAL CLEARANCE, C3
GREASE, ENS

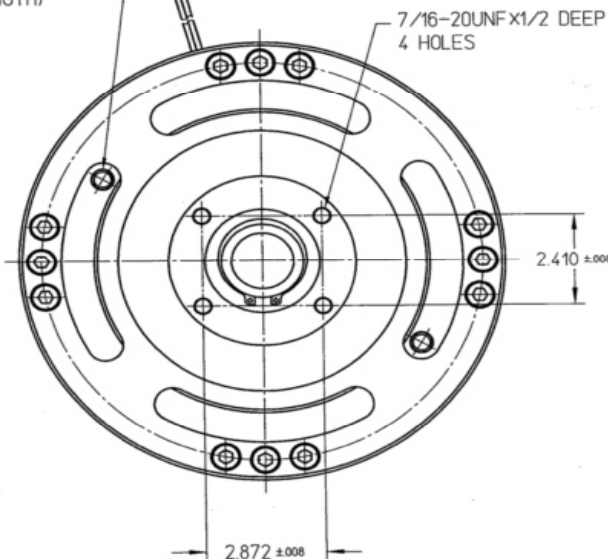

SPECIFICATION

1. RATED VOLTAGE : DC24V
2. STANDARD RANGE OF VOLTAGE : DC24V±10%
3. COIL RESISTANCE : 6.8Ω±10% (at 20℃)
4. RATED WATTAGE : 85W (at DC24V, 20℃)
5. STATIC TORQUE : 950N·m MIN (at DC24V, 20℃, after burnishing)
: 665N·m MIN (at DC24V, 20℃, before burnishing)
6. INSULATION CLASSIFICATION : CLASS B
7. INERTIA MORMENT
ROTOR SIDE : $1.2 \times 10^{-1} \text{ kg} \cdot \text{m}^2$ (approx)
ARMATURE SIDE : $9.3 \times 10^{-2} \text{ kg} \cdot \text{m}^2$ (approx)
8. INSULATION RESISTANCE : 100MΩ MIN (DC500V at MEGGER)
9. DIELECTRIC STRENGTH VOLTAGE : AC1000V for one minute or AC1200V for one second
10. MASS : 42kg (approx)
11. SUBSTANCES OF ENVIRONMENTAL CONCERN : RoHS COMPLIANT

ANNOTATION

1. ACCESSORY
SURGE SUPPRESSION RESISTOR 50Ω (50W)
2. SURFACE TREATMENT
ELECTROPLATED COATINGS OF ZINC WITH CHROMATING
FIELD, ROTOR, ARMATURE, ARMATURE HUB
3. INSTALLING PRECAUTIONS
Fasten fitting bolts with adhesive or washers.

RoHS
COMPLIANT

HISTORY	APPROV	DATE	SIZE	CUSTOMER
	CHKD	DATE	SCALE	
	Q-CKD	DATE	1/3	
	DWN	DATE		
42934113	APPROV	DATE	SIZE	MODEL
	CHKD	DATE	SCALE	
	Q-CKD	DATE	1/3	
	DWN	DATE		
ISSUE NO	PLANT	PARTS CODE	NAME	ASSY NO
	1	1113856800		
ISSUE DATE	10.9.7	OGURA CLUTCH Co.,LTD.	DWG NO	SHT.
			800 052 15	/