
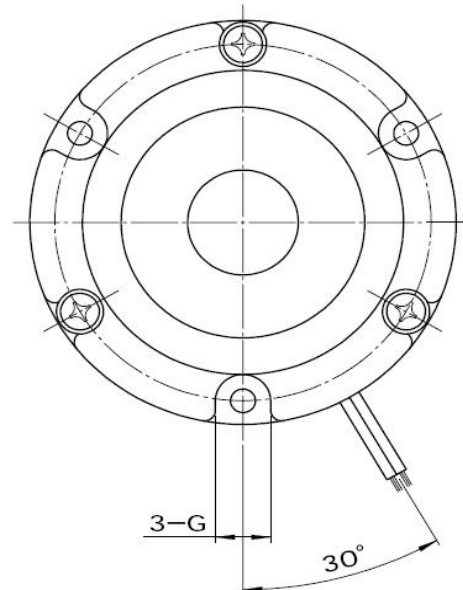


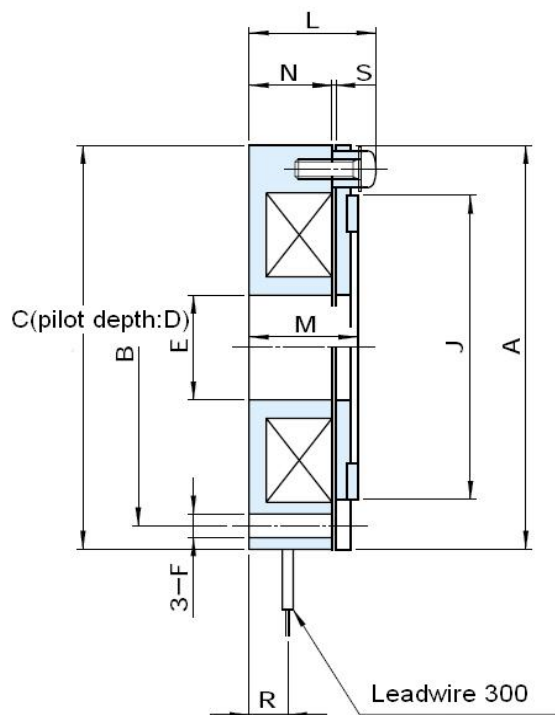

[Special Order]

FNB		0.1G	0.1K	0.2G	0.2K	0.4G	0.4K	0.8G	0.8K
Static Torque [in-lbs / N-m]		9 / 1		18 / 2		35 / 4		71 / 8	
Coil (20°C)	Voltage [DC-V]	24	90	24	90	24	90	24	90
	Current [A]	0.41	0.11	0.54	0.14	0.63	0.17	0.76	0.2
	Resistance [Ω]	59	815	45	630	38	540	32	445
	Wattage [W]	10		13		15		18	
Armature	Pull-In Time ¹ [ms]	35		45		55		70	
	Release Time ¹ [ms]	12		12		15		25	
Max Allowable Speed [rpm]		5000		4000		4000		3500	
Dimensions [mm]		A	77	85	97	117			
		B	68	74	85	108			
		Ch9	77	85	97	117			
		D	3	4	4	4			
		E	20	20	25	40			
		F	4.5	5.5	5.5	5.5			
		G	10	11	11	11			
		J	58	62	72	93			
		L	23	24.5	26.5	30.5			
		M	19.7	21.2	22	25.5			
		N	15	16	17	19.5			
		R	7	7.5	8.5	8.5			
		S	0.15~0.25	0.15~0.25	0.15~0.25	0.15~0.25			
Weight [lbs / kg]		1.1 / 0.5		1.4 / 0.6		2.0 / 0.9		3.1 / 1.4	

[1" = 25.4mm]