
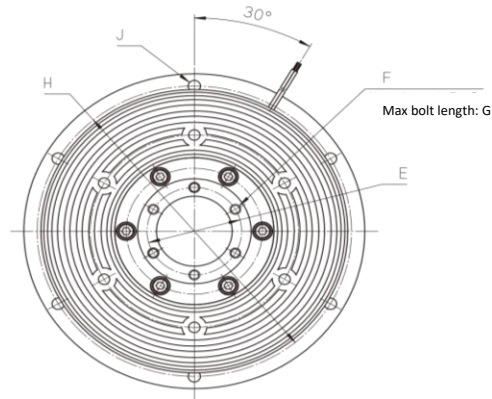


12/02/2021

HB**EM Hysteresis Brake**

Type: 20, 40

[EM: Electromagnet]

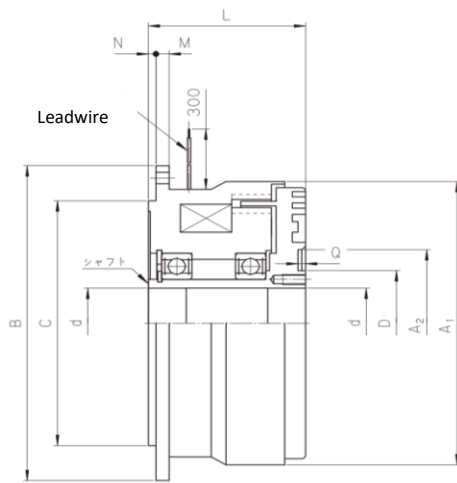

HB			20	40
Rated Torque		[Nm]	2	4
Coil (20°C)	Voltage	[DC-V]	24	
	Current (75°C)	[A]	1.25	1.58
	Resistance	[Ω]	15.8	12.5
	Wattage	[W]	36.5	46.1
	Time Constant	[ms]	85	115
Moment of Inertia		$J \times 10^{-4} [\text{kg} \cdot \text{m}^2]$	27.3	35.5
Bore		d	30	40
Radial	A ₁		162	162
	A ₂		84	84
	B		180	180
	C _{h7}		140	140
	D _{h7}		60	60
	E		50	50
	F		6×M6	6×M6
	G		12Min.	12Min.
	H		166	166
Axial	J		6×6.5	6×6.5
	L		80	83
	M		7	7
	N		4	4
	Q		4	4
Mass [g]			8600	9000

Ogura Industrial
100 Randolph Rd.
Somerset, NJ 08875

www.ogura-clutch.com
info@ogura-clutch.com
(732)-271-7361