


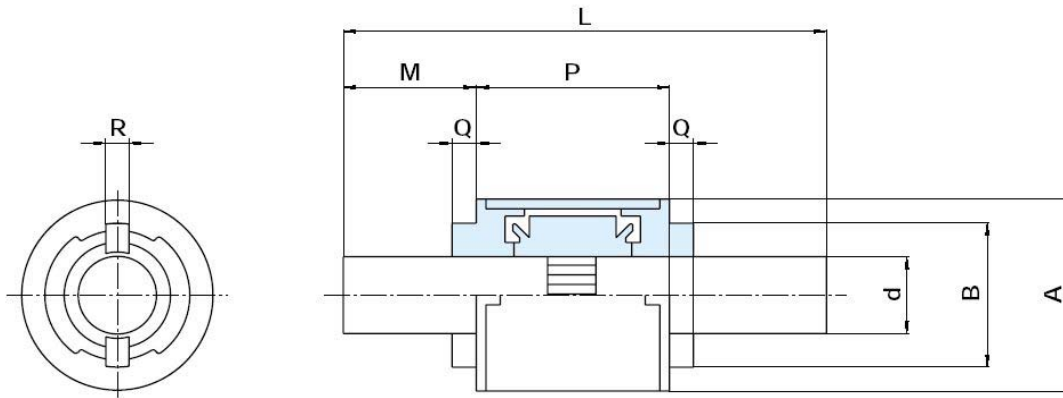

[Special Order]

OPL		0.3N	0.6N	1.2N	1.8N
Static Torque [in-lbs / N-m]		0.27 / 0.03	0.53 / 0.06	1.1 / 0.12	1.6 / 0.18
Optional Torque Range [in-lbs]		0.17~0.35	0.35~0.53	0.53~1.06	1.06~1.60
Optional Torque Range [N-m]		0.02~0.04	0.04~0.06	0.06~0.12	0.12~0.18
Max Slip Speed [rpm]		300	300	250	200
Shaft [mm]	d+0/-0.03	8	8	8	8
Dimensions [mm]	A	20	20	20	20
	B	15	15	15	15
	L	180	180	180	180
	M	50	50	50	50
	P	20	20	27	34
	Q	2.5	2.5	2.5	2.5
	R	2.4	2.4	2.4	2.4
Weight [lbs / kg]		0.19 / 0.09	0.19 / 0.09	0.21 / 0.10	0.23 / 0.10

[1" = 25.4mm]

[* Note 1: Length or shaft can be modified. Flat or special ring groove can also be added.]