


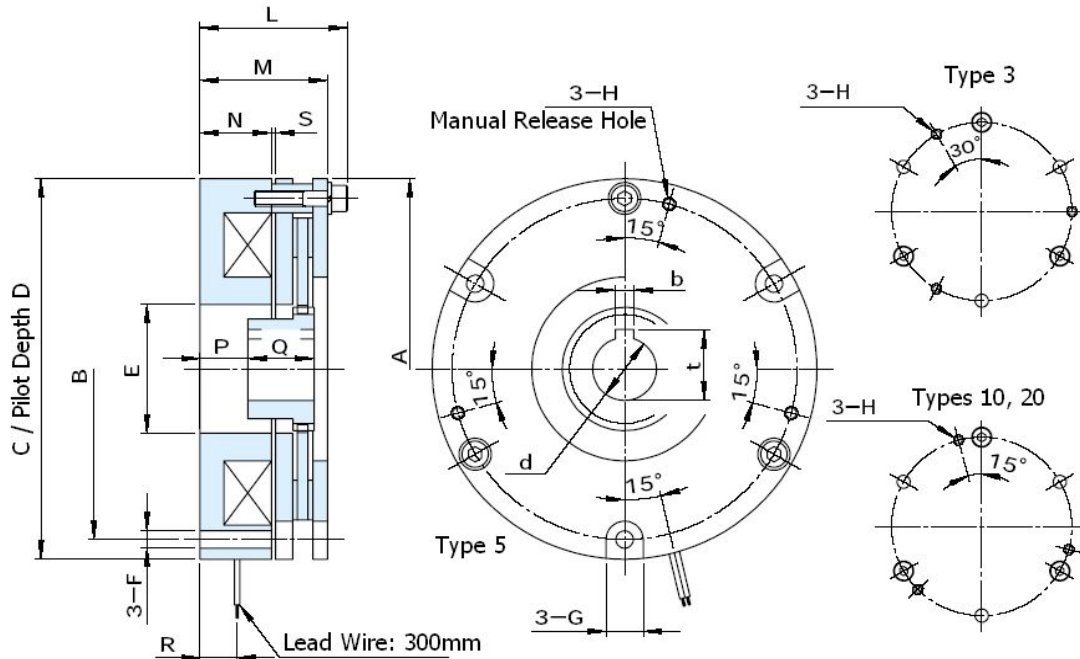

RNB ¹		3G	3K	5G	5K	10G	10K	20G	20K
Static Torque [ft-lbs / N-m]		22 / 30		37 / 50		74 / 100		148 / 200	
Coil (20°C)	Voltage [DC-V]	24	90	24	90	24	90	24	90
	Current [A]	0.96	0.25	1.13	0.3	1.37	0.37	1.88	0.5
	Resistance [Ω]	25	358	21	300	17.5	245	12.8	180
	Wattage [W]	23		27		33		45	
Armature	Pull-In Time [ms]	100		120		180		250	
	Release Time [ms]	35		50		65		90	
Max Allowable Speed [rpm]		3500		3000		3000		2500	
Moment of Inertia (J) [kg-cm ²]		3		5.75		13		21	
Bore [mm]		dH7	19	24	28	32			
Key Way [mm]	bE9	5	7	7	10				
	t+0.15/-0	21	27	31	35.5				
Dimensions [mm]	A	125	145	165	187				
	B	112	130	150	170				
	Ch9	125	145	165	187				
	D	4	5	5	6				
	E	49	49	62	62				
	F	6.6	6.6	9	9				
	G	14	14	18	18				
	H	M5	M5	M6	M6				
	L	53.5	56.5	71	81				
	M	46	49	61	71				
	N	26	27	32	37				
	P	16	18	22	21				
	Q	25	25	30	40				
	R	11	14	17	21				
	S	0.15~0.3		0.15~0.3		0.15~0.3		0.2~0.35	
Weight [lbs / kg]		7.9 / 3.6		11 / 5		17 / 8		27 / 12	

[Note 1 : For holding and emergency-stop applications only]

[1 inch = 25.4 mm]