
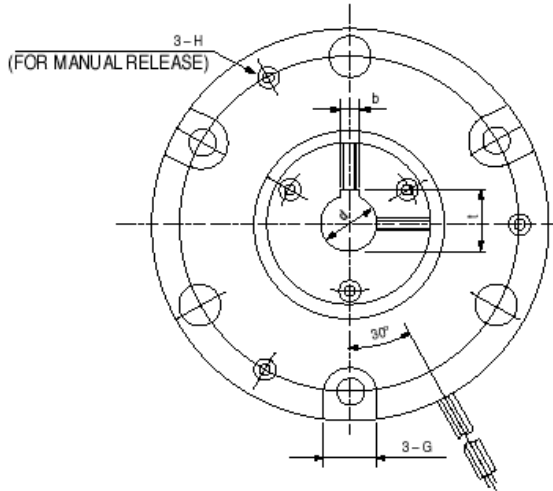


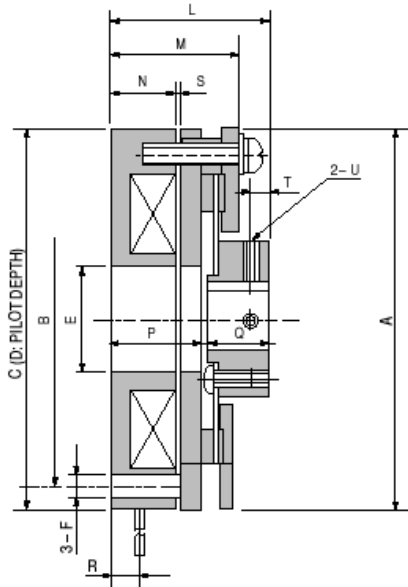

RNB ¹		0.2ZG	0.2ZK	0.4ZG	0.4ZK	0.8ZG	0.8ZK	1.6ZG	1.6ZK
Static Torque [ft-lbs / N-m]		1.5 / 2		3 / 4		5.9 / 8		12 / 16	
Coil (20°C)	Voltage [DC-V]	24	90	24	90	24	90	24	90
	Current [A]	0.41	0.11	0.54	0.14	0.63	0.17	0.76	0.2
	Resistance [Ω]	59	815	45	630	38	540	32	445
	Wattage [W]	10		13		15		18	
Armature	Pull-In Time [ms]	35		45		55		70	
	Release Time [ms]	12		12		15		25	
Max Allowable Speed [rpm]		5000		4000		4000		3500	
Moment of Inertia (J) [kg-cm ²]		0.16		0.23		0.45		0.7	
Bore [mm]		dH7		12		14		15	
Key Way [mm]	bE9	4		4		5		5	
	t+0.15/-0	13.5		13.5		16		17	
Dimensions [mm]	A	77		85		97		117	
	B	68		74		85		108	
	Ch9	77		85		97		117	
	D	3		4		4		4	
	E	20		20		25		40	
	F	4.5		5.5		5.5		5.5	
	G	10		11		11		11	
	H	-		-		M4		M5	
	L	33		39		38.3		45.3	
	M	26		28		30		31.5	
	N	15		16		17		19.5	
	P	21		22		23.3		25.3	
	Q	12		17		15		20	
	R	7		7.5		8.5		8.5	
	S	0.15~0.25		0.2~0.3		0.2~0.35		0.2~0.35	
	T	4		4.5		4.5		5	
	U	2xM4		2xM4		2xM5		2xM5	
Weight [lbs / kg]		1.3 / 0.6		1.9 / 0.9		2.6 / 1.2		4.2 / 1.9	

[Note 1 : For holding and emergency-stop applications only]

[1 inch = 25.4 mm]